Ordering number: EN 2163A

SANYO

No.2163A

2SA1523/2SC3917

PNP/ NPN Epitaxial Planar Silicon Transistors

Switching Applications (with Bias Resistance)

Applications

. Switching circuits, inverter circuits, interface circuits, driver circuits

Features

. On-chip bias resistance (R_1=4.7kΩ, R_2=4.7kΩ)
. Small-sized package (SPA)
. Large current capacity (I_C=500mA)

( ): 2SA1523


Absolute Maximum Ratings at Ta=25°C

			unit
Collector to Base Voltage	V_{CBO}	(-)50	V
Collector to Emitter Voltage	V_{CEO}	(-)50	V
Emitter to Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)500	mA
Collector Current (Pulse)	I_{CP}	(-)800	mA
Collector Dissipation	P_C	300	mW
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55 to +150	°C


Electrical Characteristics at Ta=25°C

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	V_{CB}=(-)40V, I_E=0			(-)0.1	μA
	I_{CEO}	V_{CE}=(-)40V, I_B=0			(-)0.5	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}=(-)5V, I_C=0	(-)410	(-)532	(-)760	μA
DC Current Gain	h_{FE}	V_{CE}=(-)5V, I_C=(-)20mA	50			
Gain-Bandwidth Product	f_T	V_{CE}=(-)10V, I_C=(-)5mA		250		MHz
				(200)		MHz
Output Capacitance	C_{ob}	V_{CB}=(-)10V, f=1MHz		3.7		pF
				(5.5)		pF
C-E Saturation Voltage	$V_{CE(sat)}$	I_C=(-)40mA, I_B=(-)2mA		(-)0.1	(-)0.3	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	I_C=(-)10μA, I_E=0	(-)50			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	I_C=(-)100μA, R_{BE}=∞	(-)50			V
Input OFF-State Voltage	$V_{I(off)}$	V_{CE}=(-)5V, I_C=(-)100μA	(-)0.8	(-)1.1	(-)1.5	V
Input ON-State Voltage	$V_{I(on)}$	V_{CE}=(-)0.2V, I_C=(-)20mA	(-)1.0	(-)1.9	(-)4.0	V
Input Resistance	R_1		3.3	4.7	6.1	kΩ
Resistance Ratio	R_1/R_2		0.9	1.0	1.1	

Electrical Connection

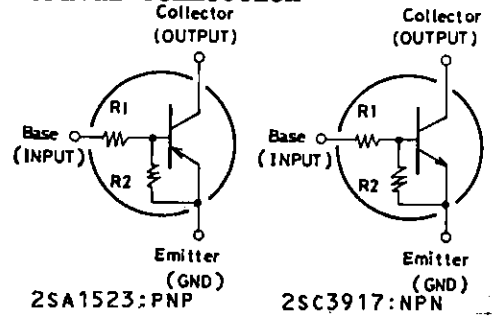


Package Dimensions 2033
(unit: mm)

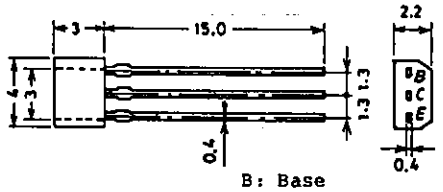



B: Base
C: Collector
E: Emitter

SANYO: SPA

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

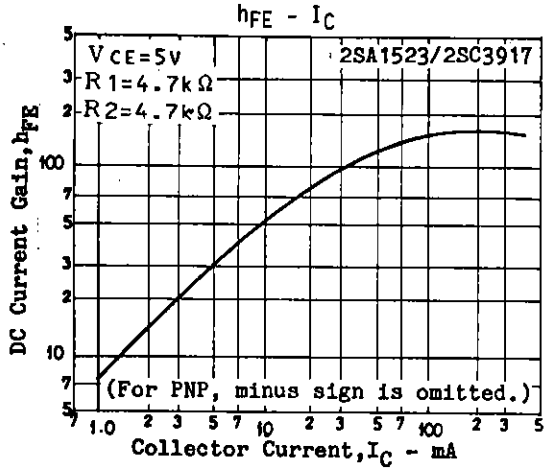

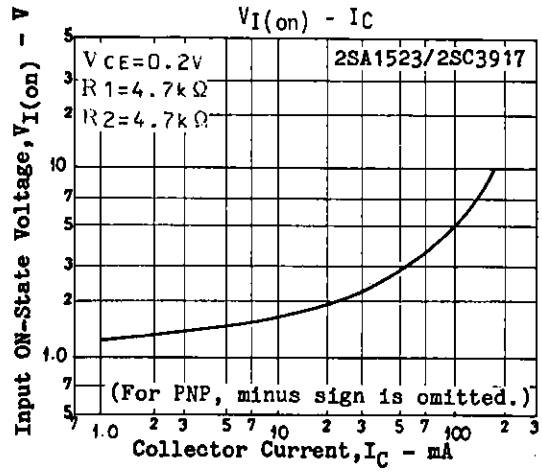

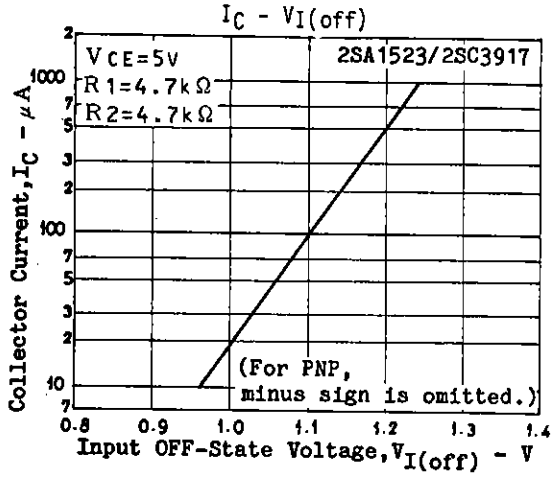

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.