


UDS01 UDH01 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE
UP TO 1.08 Watts

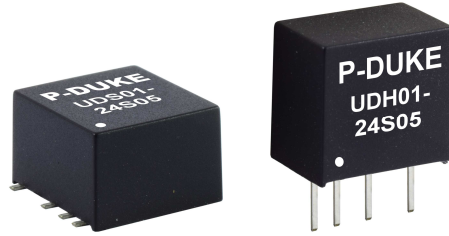

FEATURES

- ULTRA SMALL SMD PACKAGE, 0.47 x 0.44 x 0.31 INCH
SIP PACKAGE, 0.47 x 0.30 x 0.43 INCH
- NO MINIMUM LOAD REQUIRED
- REGULATED OUTPUT VOLTAGE
- CONTINUOUS SHORT CIRCUIT PROTECTION
- 1600VDC INPUT TO OUTPUT ISOLATION
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- MEASUREMENT EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
UDS(H)01-05S3P3	4.5 ~ 13.2	3.3	300	33	77	1680
UDS(H)01-05S05	4.5 ~ 13.2	5	200	33	79	820
UDS(H)01-05S12	4.5 ~ 13.2	12	90	33	81	470
UDS(H)01-05S15	4.5 ~ 13.2	15	70	33	82	330
UDS(H)01-05S24	4.5 ~ 13.2	24	45	36	83	160
UDS(H)01-05D05	4.5 ~ 13.2	±5	±100	36	79	±470
UDS(H)01-05D12	4.5 ~ 13.2	±12	±45	36	83	±330
UDS(H)01-05D15	4.5 ~ 13.2	±15	±35	36	80	±220
UDS(H)01-12S3P3	9 ~ 18	3.3	300	18	77	1680
UDS(H)01-12S05	9 ~ 18	5	200	18	80	820
UDS(H)01-12S12	9 ~ 18	12	90	18	81	470
UDS(H)01-12S15	9 ~ 18	15	70	18	83	330
UDS(H)01-12S24	9 ~ 18	24	45	22	83	160
UDS(H)01-12D05	9 ~ 18	±5	±100	22	79	±470
UDS(H)01-12D12	9 ~ 18	±12	±45	22	83	±330
UDS(H)01-12D15	9 ~ 18	±15	±35	22	80	±220
UDS(H)01-24S3P3	18 ~ 36	3.3	300	10	77	1680
UDS(H)01-24S05	18 ~ 36	5	200	10	81	820
UDS(H)01-24S12	18 ~ 36	12	90	10	82	470
UDS(H)01-24S15	18 ~ 36	15	70	10	83	330
UDS(H)01-24S24	18 ~ 36	24	45	10	82	160
UDS(H)01-24D05	18 ~ 36	±5	±100	10	79	±470
UDS(H)01-24D12	18 ~ 36	±12	±45	10	82	±330
UDS(H)01-24D15	18 ~ 36	±15	±35	10	80	±220
UDS(H)01-48S3P3	36 ~ 75	3.3	300	5	77	1680
UDS(H)01-48S05	36 ~ 75	5	200	5	78	820
UDS(H)01-48S12	36 ~ 75	12	90	5	80	470
UDS(H)01-48S15	36 ~ 75	15	70	5	81	330
UDS(H)01-48S24	36 ~ 75	24	45	5	81	160
UDS(H)01-48D05	36 ~ 75	±5	±100	5	78	±470
UDS(H)01-48D12	36 ~ 75	±12	±45	5	81	±330
UDS(H)01-48D15	36 ~ 75	±15	±35	5	79	±220

PART NUMBER STRUCTURE

UDS01 -	48	S	05
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)
UDS: SMD type	05:4.5~13.2	S:Single	3P3:3.3
UDH: SIP type	12:9~18 24:18~36 48:36~75		05:5 12:12 15:15 24:24
		D: Dual	05:± 5 12:±12 15:±15

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	5Vin(nom)	4.5	5	13.2	VDC
	12Vin(nom)	9	12	18	
	24Vin(nom)	18	24	36	
	48Vin(nom)	36	48	75	
Start up time	Constant resistive load Power up		5		ms
Input surge voltage	1 second, max.	5Vin(nom)		15	VDC
		12Vin(nom)		25	
		24Vin(nom)		50	
		48Vin(nom)		100	
Input reflected ripple current ⁽¹⁾		5Vin(nom)	30		mAp-p
		12Vin(nom)	30		
		24Vin(nom)	30		
		48Vin(nom)	30		
Input filter					Capacitor type

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%	
Load regulation	No Load to Full Load	Single		+1.0	%	
		Dual		+1.0		
	10% Load to 90% Full Load	Single	-0.5		+0.5	%
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%	
Ripple and noise	Measured by 20MHz bandwidth		50		mVp-p	
Temperature coefficient		-0.02		+0.02	%/°C	
Transient response recovery time	25% load step change		500		µs	
Short circuit protection					Continuous, automatic recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output	1600			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				75	pF
Switching frequency		100			kHz
Safety meets					UL60950-1 EN60950-1 IEC60950-1
Case material					Non-conductive black plastic
Base material					None
Potting material					Silicone (UL94 V-0)
Weight					2.1g(0.07oz)
MTBF	MIL-HDBK-217F, Full load				7.380 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		105	°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI ⁽¹⁾	EN55022	Class A · Class B
ESD	EN61000-4-2 Air ± 8kV Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient ⁽²⁾	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge ⁽²⁾	EN61000-4-5 ±1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A


- Note:**
- The standard modules meet EMI Class A or Class B and input reflected ripple current with external components. For further information, please contact with P-DUKE.
 - An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

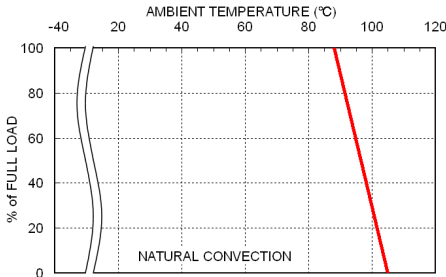

UDS(H)01-48S05 Derating Curve

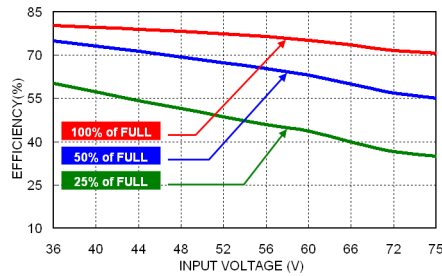


UDS(H)01-48S05 Efficiency vs. Input Voltage

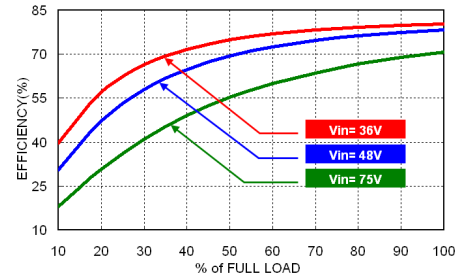

UDS(H)01-48S05 Efficiency vs. Output Load

MECHANICAL DRAWING

UDS01

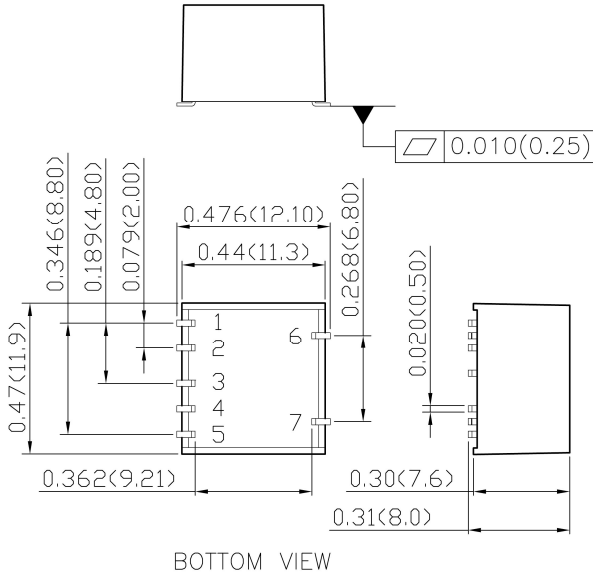


PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout
6	* NC	* NC
7	* NC	* NC

* NC : No electrical characteristics

UDH01

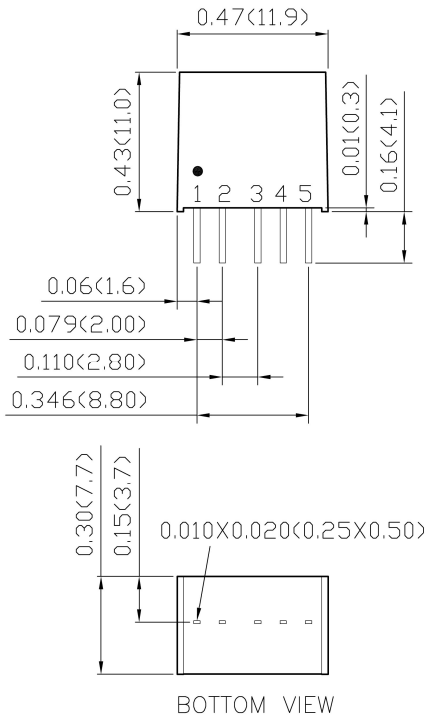

PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
 x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)