


SHEET 1 OF 1

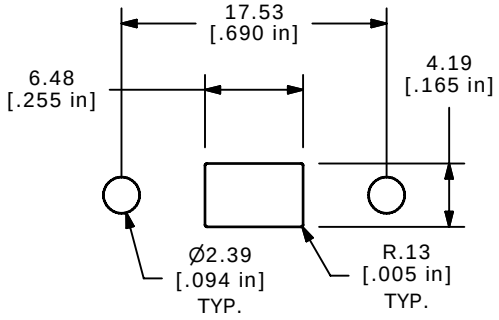


RECOMMENDED PANEL CUTOUT



RECOMENDED
P.C.B. LAYOUT

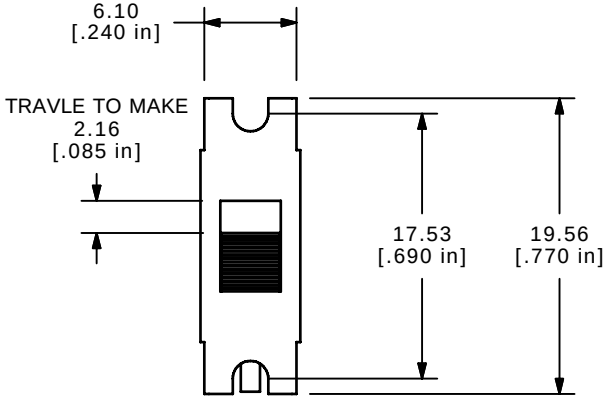

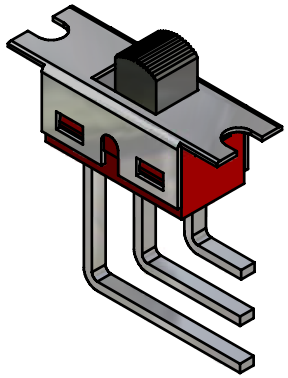

ISOMETRIC

B ▲


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	(ON)
2-1	OPEN	2-3


(ON)=MOMENTARY



CIRCUIT: SPDT

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) MAX. @20V MAX.
6. ELECTRIC LIFE: 30,000 ACTUATIONS
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

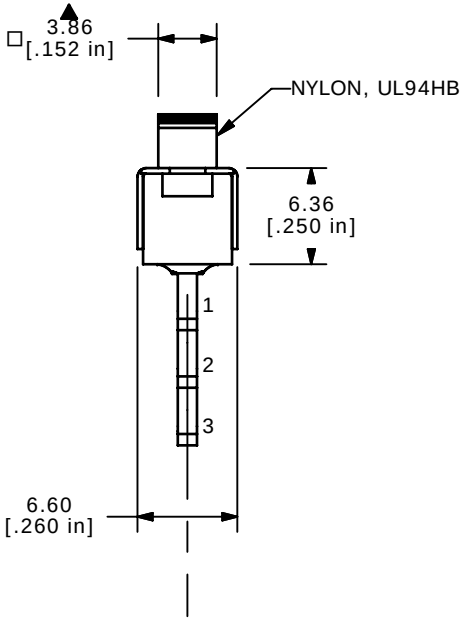

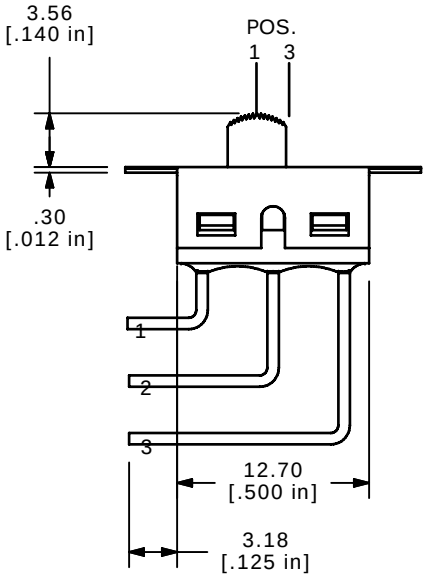

REV	PCR NO	DESCRIPTION	DATE	BY
C	15077	Dim 3.18 was 2.69	7/20/05	RC
B	14975	CHANGED FUNCTION TABLE	6/3/05	JB
A	14916	RELEASED FOR PRODUCTION	5/18/05	JB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 500SSP2S4M7REB

SCALE	DATE	DR	DWG	REV
2:1	5/18/2005	JB	T505000	C