

DM54ALS390/DM74ALS390 Dual 4-Bit Decade Counters

General Description


Each of these monolithic counters contains eight master-slave flip-flops and additional gating to implement two independent four bit counters in a single package.

To use their maximum count length, the B input is connected to the QA output. The input count pulses are applied to input A and the outputs are as described in the appropriate truth table. A symmetrical divide-by-ten count can be obtained by connecting the QD output to the A input and applying the input count to the B input.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Individual clocks for A and B flip-flops provide dual divide-by-2 and divide-by-5 counters
- Direct clear for each 4-bit counter

Connection Diagram



TL/F/9169-1

Order Number **DM54ALS390J**, **DM74ALS390M** or **DM74ALS390N**

See NS Package Number **J16A**, **M16A** or **N16A**

Function Tables

BCD Count Sequence
(See Note 2)

Count	Output			
	QD	QC	QB	QA
0	L	L	L	L
1	L	L	L	H
2	L	L	H	L
3	L	L	H	H
4	L	H	L	L
5	L	H	L	H
6	L	H	H	L
7	L	H	H	H
8	H	L	L	L
9	H	L	L	H

Bi-Quinary (5-2)
(See Note 3)

Count	Output			
	QA	QD	QC	QB
0	L	L	L	L
1	L	L	L	H
2	L	L	H	L
3	L	L	H	H
4	L	H	L	L
5	H	L	L	L
6	H	L	L	H
7	H	L	H	L
8	H	L	H	H
9	H	H	L	L

Note 2: Output QA is connected to input B for BCD count

Note 3: Output QD is connected to input A for bi-quinary count

H = High Logic Level, L = Low Logic Level

This document contains information on a product under development. NSC reserves the right to change or discontinue this product without notice.

Absolute Maximum Rating

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	
DM54ALS	−55°C to +125°C
DM74ALS	0°C to +70°C
Storage Temperature Range	−65°C to +150°C

Note: The “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the “Electrical Characteristics” table are not guaranteed at the absolute maximum ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter		DM54ALS390			DM74ALS390			Units
			Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage		4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High Level Input Voltage		2			2			V
V _{IL}	Low Level Input Voltage				0.7			0.8	V
I _{OH}	High Level Output Current				−0.4			−0.4	mA
I _{OL}	Low Level Output Current				4			8	mA
f _{COUNT}	Count Frequency	A Input	0			0			MHz
		B Input	0			0			
t _W	Pulse Width	A Input High							ns
		A Input Low							
		B Input High							
		Clear High							
t _{SU}	Clear Inactive-State Setup Time								ns
T _A	Free Air Operating Temperature		−55		125	0		70	°C

Electrical Characteristics over recommended free air temperature range

Symbol	Parameter	Test Conditions		Min	Typ	Max	Units
V _{IC}	Input Clamp Voltage	V _{CC} = Min, I _I = −18 mA				−1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = 4.5V to 5.5V, I _{OH} = −0.4 mA		V _{CC} − 2			V
V _{OL}	Low Level Output Voltage	V _{CC} = Min	54/74ALS I _{OL} = 4 mA		0.25	0.4	V
			74ALS I _{OL} = 8 mA		0.35	0.5	
I _I	Input Current at Max, V _I = 7V Input Voltage	V _{CC} = Max, V _I = 7V	Clear			100	μA
			Input A			200	
			Input B			300	
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.7V	Clear			20	μA
			Input A			40	
			Input B			60	
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I = 0.4V	Clear			−100	μA
			Input A			−200	
			Input B			−300	
I _O	Output Drive Current (B Bus Ports Only)	V _{CC} = Max, V _O = 2.25V		−30		−112	mA
I _{CC}	Supply Current	V _{CC} = Max (Note 1)					mA


Switching Characteristics over recommended operating free air temperature range

Symbol	Parameter	Conditions	From (Input) To (Output)	DM54ALS390		DM74ALS390		Units
				Min	Max	Min	Max	
f _{max}	Maximum Clock Frequency	V _{CC} = 4.5 to 5.5V, R _L = 500,Ω C _L = 50 pF T _A = Min to Max (Note 2)	A to QA					MHz
			B to QB					
t _{PLH}	Propagation Delay Time Low to High Level Output		A to QA					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		A to QA					ns
t _{PLH}	Propagation Delay Time Low to High Level Output		A to QC					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		A to QC					ns
t _{PLH}	Propagation Delay Time Low to High Level Output		B to QB					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		B to QB					ns
t _{PLH}	Propagation Delay Time Low to High Level Output		B to QC					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		B to QC					ns
t _{PLH}	Propagation Delay Time Low to High Level Output		B to QD					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		B to QD					ns
t _{PHL}	Propagation Delay Time High to Low Level Output		Clear to Any Q					ns

Note 1: I_{CC} is measured with all outputs open, both clear inputs grounded following momentary connection to 4.5V and all other inputs grounded.


Note 2: See Section 5 for test waveforms and output load.

Logic Diagram

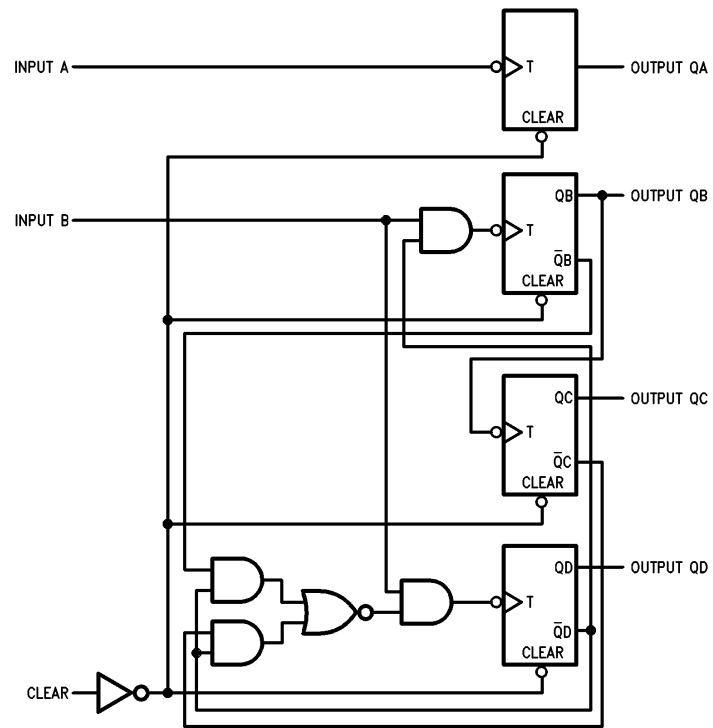


TL/F/9169-2


Physical Dimensions inches (millimeters)

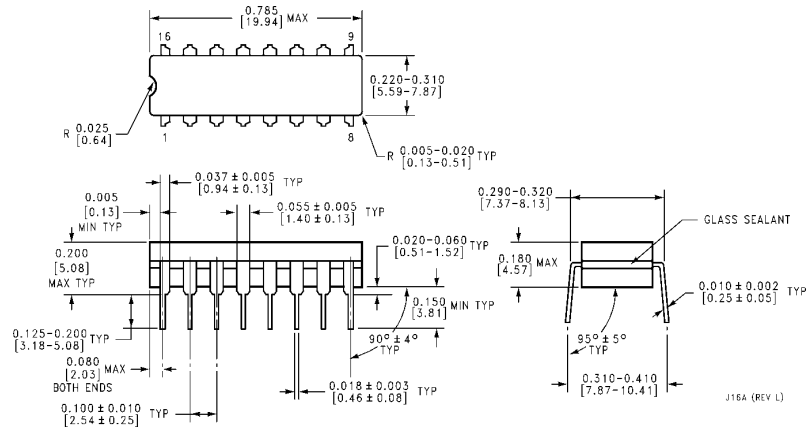

Ceramic Dual-In-Line Package (J)
Order Number DM54ALS390J
NS Package Number J16A

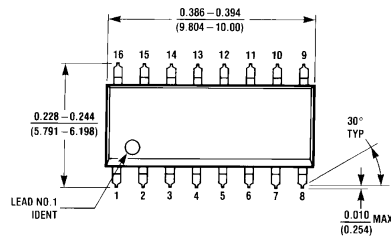

S.O. Package (M)
Order Number DM74ALS390M
NS Package Number M16A

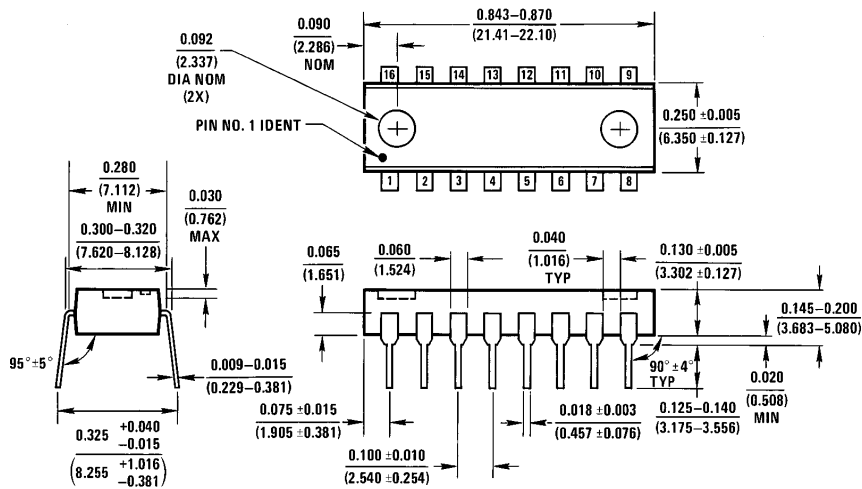Physical Dimensions inches (millimeters) (Continued)

N16A (REV E)

Molded Dual-In-Line Package (N)
Order Number DM74ALS390N
NS Package Number N16A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.