


**KEMET Part Number: PME261JB5220KR30**  
(P561QM223K500A)

Film, Metallized Paper, Commercial Grade, PME261/P561, 0.022 uF, 10%, 1,000 V, 85C, Lead Spacing = 15.2mm

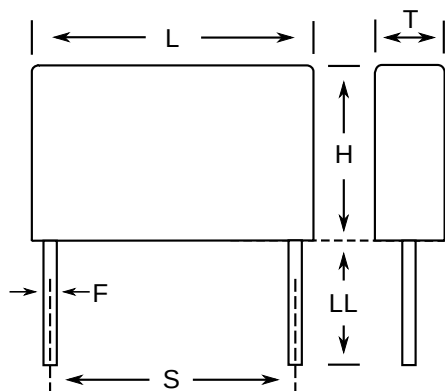

**Dimensions**

|    |                 |
|----|-----------------|
| L  | 18.5mm MAX      |
| H  | 13mm MAX        |
| T  | 7.3mm MAX       |
| S  | 15.2mm +/-0.4mm |
| LL | 30mm +5mm       |
| F  | 0.8mm +/-0.05mm |

**Packaging Specifications**

|                     |      |
|---------------------|------|
| Packaging:          | Bulk |
| Packaging Quantity: | 400  |

**General Information**

|                |                       |
|----------------|-----------------------|
| Dielectric:    | Metallized Paper      |
| Style:         | Radial                |
| Series:        | PME261/P561           |
| Features:      | Pulse                 |
| RoHS:          | Yes                   |
| Lead:          | Wire Leads            |
| Construction:  | Molded                |
| Miscellaneous: | AC Operation: 70C MAX |

**Specifications**

|                        |           |
|------------------------|-----------|
| Capacitance:           | 0.022 uF  |
| Capacitance Tolerance: | 10%       |
| Voltage DC:            | 1000 VDC  |
| Voltage AC:            | 500 VAC   |
| Temperature Range:     | -40/+100C |
| Rated Temperature:     | 85C       |
| Dissipation Factor:    | 1.3% 1kHz |
| Insulation Resistance: | 12 GOhms  |
| Max dVdt:              | 2,000 V   |