

Customer Information Sheet

DRAWING No.: S1711-XXR






IF IN DOUBT - ASK

©




NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

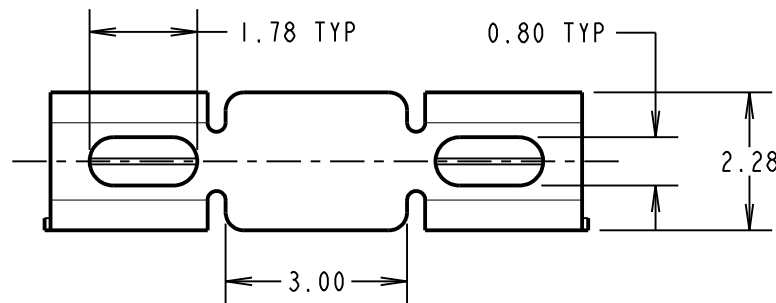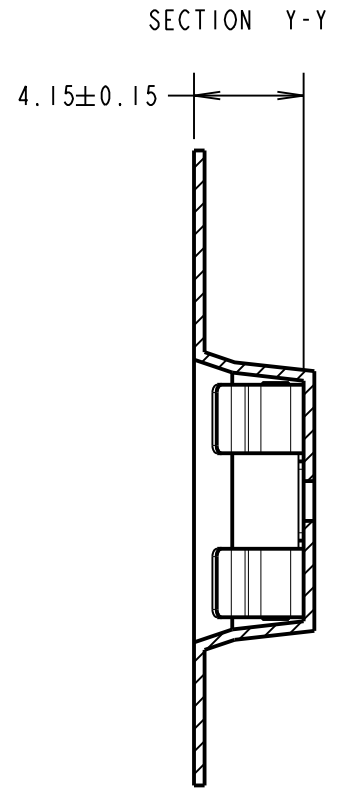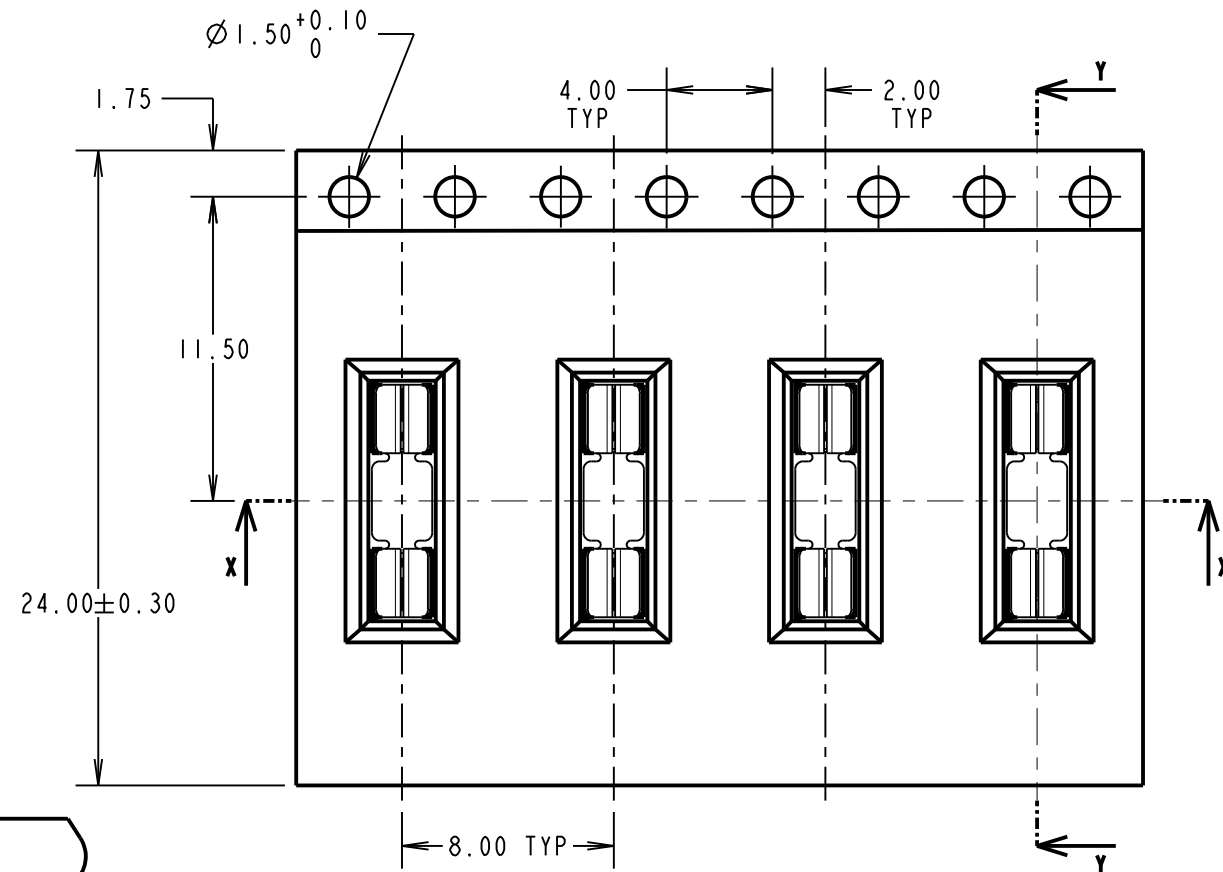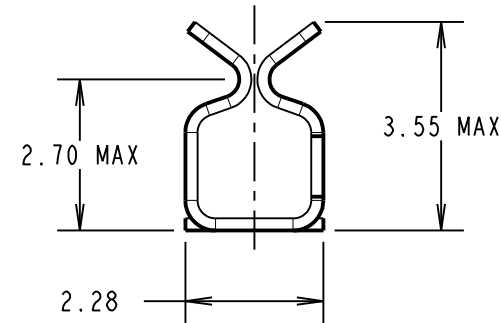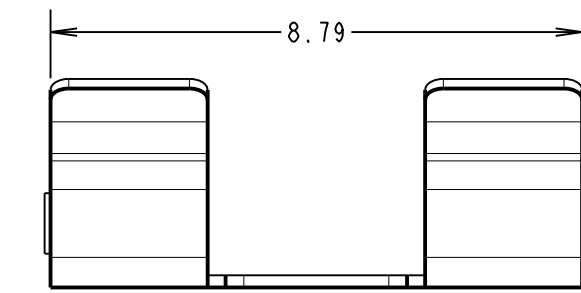


RECOMMENDED SHIELD CAN CUT OUT

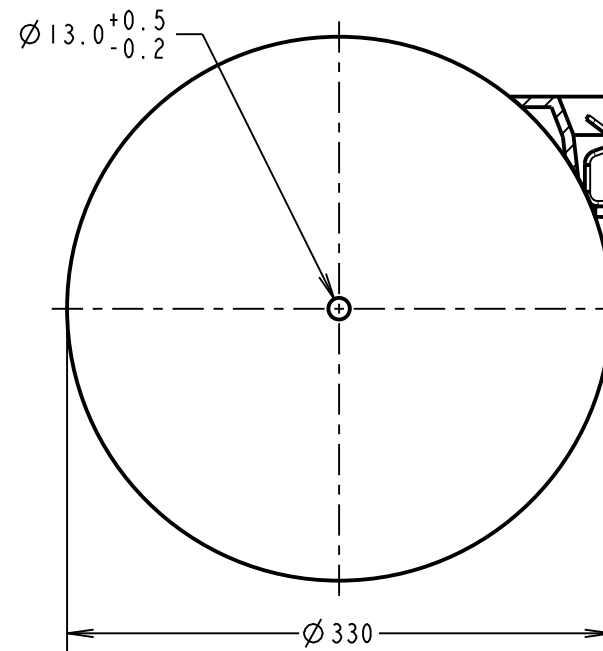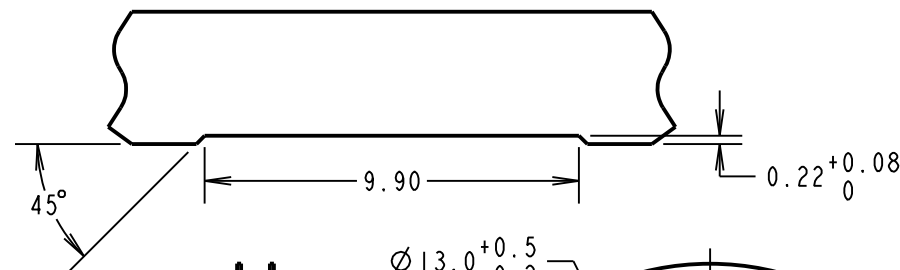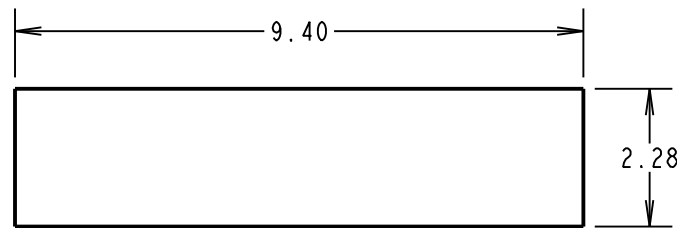

SECTION X-X

REELING DIRECTION →

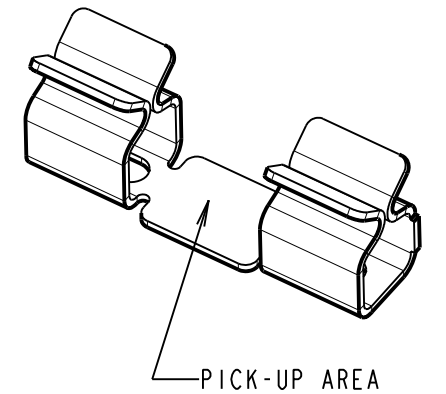

COMPONENT SPECIFICATION:
 MATERIAL = BERYLLIUM COPPER
 FINISH:
~~06 = 2.5-3.5µ 90/10 TIN/LEAD,
 OVER 2.0-4.0µ NICKEL~~
 46 = 2.4-3.6µ 100% TIN,
 OVER 2.0-2.8µ NICKEL.
 ENVIRONMENTAL:
 OPERATING TEMPERATURE = -40°C TO +125°C

PERFORMANCE SPECIFICATIONS:
 INSERTION FORCE (AFTER CONDITIONING) = 4N MAX
 WITHDRAWAL FORCE = 0.5N MIN
 DURABILITY = 20 INSERTIONS MINIMUM
 CONTACT RESISTANCE = 20mΩ MAX
 SHIELD THICKNESS = 0.17mm - 0.30mm

NOTES:
 1. QUANTITY PER REEL = 1,900.
 2. THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

ORDER CODE:

S1711-XXR

FINISH:
~~06 = TIN/LEAD OVER NICKEL~~
 46 = 100% TIN OVER NICKEL

OBsolete

MSP	13	03.08.17	20719
NAME	ISS.	DATE	C/NOTE
APPROVED: M. PERREN			
CHECKED: S. BENNETT			
DRAWN: M. PLESTED			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

SMT RFI SHIELD CLIP
 IN TAPE AND REEL

DRAWING NUMBER:

S1711-XXR

SHT
 2 OF 2