PRELIMINARY

SDR6KSMS and SDR6MSMS

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


Designer's Data Sheet

6 AMP
800-1000 VOLTS
60-70 nsec
ULTRA FAST
RECTIFIER

FEATURES:

- Ultra Fast Recovery: 60-70 nsec Max. @ 25°C
  115-120 nsec Max. @ 100°C
- Single Chip Construction
- PIV to 1000 Volts
- Low Reverse Leakage Current
- Hermetically Sealed Surface Mount package
- Replaces larger DO-4 Rectifiers
- Metallurgically Bonded
- Available in axial leaded versions
- TX, TXV and Space Level Screening Available

SURFACE MOUNT
SQUARE TAB



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage **SDR6KSMS** **SDR6MSMS**	V_{RRM} V_{RWM} V_R	800 1000	**Volts**
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	I_O	6	**Amps**
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on Io, allow junction to reach equilibrium between pulses, TA=25°C)	I_{FSM}	150	**Amps**
Operating and storage temperature	**Top & Tstg**	-65 to +175	**°C**
Maximum Thermal Resistance Junction to End Tab	$R_{\theta JE}$	8	**°C/W**

SDR6KSMS and SDR6MSMS

PRELIMINARY


SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS		SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (I_F = 6 Adc, T_A=25°C, 300µs Pulse)		VF	1.9	Vdc
Instantaneous Forward Voltage Drop (I_F = 6 Adc, T_A=-55°C, 300µs Pulse)		VF	2.1	Vdc
Reverse Leakage Current (Rated VR, T_A=25°C, 300µs pulse minimum)		IR	10	µA
Reverse Leakage Current (Rated V_R, T_A=100°C, 300µs pulse minimum)		IR	1	mA
Junction Capacitance (V_R = 10 Vdc, T_A=25°C, f= 1MHz)		CJ	80	pf
Reverse Recovery Time (I_F =500ma, I_R = 1A, I_{RR}=250mA, T_A=25°C)	**SDR6KSMS** **SDR6MSMS**	trr	60 70	nsec

CASE OUTLINE:

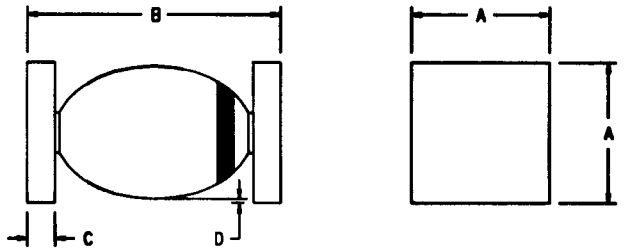

Dimensions prior to solder dipping.

DIMENSIONS		
DIM	MIN.	MAX.
A	.195"	.205"
B	.200"	.250"
C	.022"	.028"
D	.002"	---

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

