
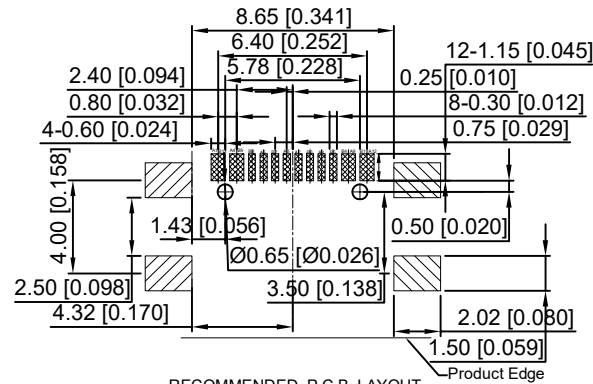






SPECIFICATION:


1. Material
 - Housing Material:High temperature thermoplastic
 - Contact Terminal:High Grade Copper Alloy
 - Merallic Shell:Stainless Steel
 - Inner Ground Cover Shell:Stainless Steel
 - Mid Plate:Stainless Steel
 2. Mechanical:
 - 2.1.Mating force:5-20Nf;
 - 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 - 2.3.Durability:5000 Cycles;
 3. Electrical:
 - 3.1.Current Rating:3A
 - 3.2.Voltage Rating:20V Max.;
 - 3.3.Dielectric Withstanding
- volage: 100Vac,60S,10mA;
- 3.4.Contact resistance:40m Ohms Max.;
 - 3.5.Insulation Resistance:100M Ohms Min.;
- 4.Environmental:
 - 4.1.Operating temperature:-40°C~+85°C;
 - 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

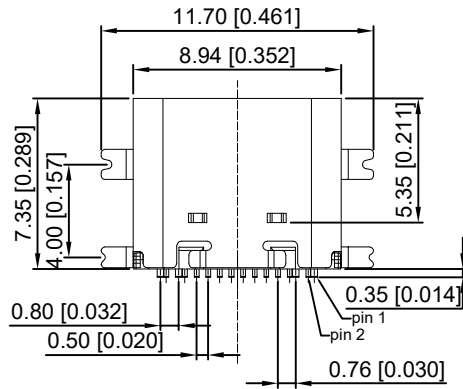

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

U262-16XN-4BS1735

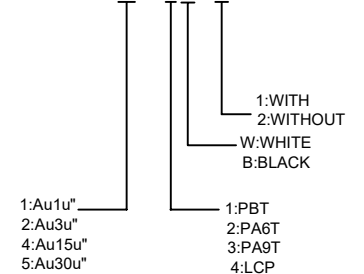

REVISIONS					UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE:		
Δx					L ≤ 4	±0.2	DWN	DATE	VIEW:	3.1 TYPE C		
Δx					4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	PART NO.:		
Δx					16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	DWG NO.:		
					L > 63	±0.5				U262-16XN-4BS1735		
www.xk-dg.cn		www.helloxkb.com		www.helloxkb.cn						WEIGHT	SHEET	REVISION
										1.0g	1/1	A0