


SHEET 1 OF 1

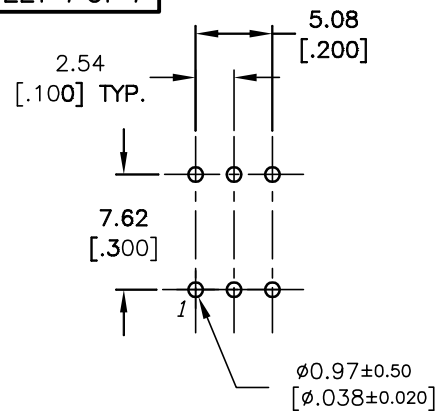


*(Pos. 1 Denotes Pin No. 1)

RECOMMEND P.C.B. LAYOUT

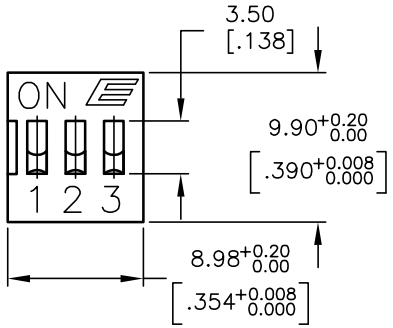





EXPLODED VIEW



CIRCUIT 3 POS.

▲

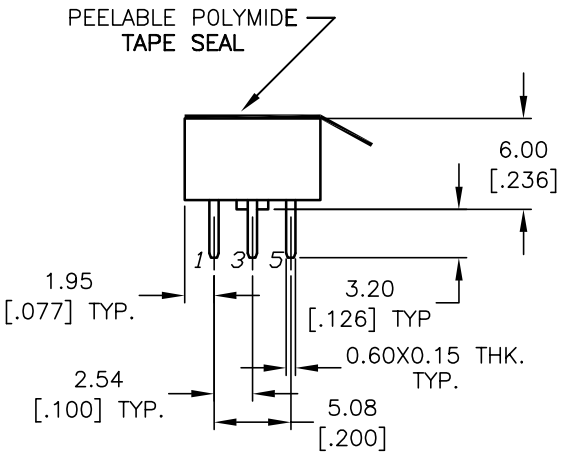

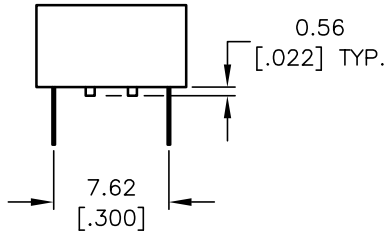

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. CONTACT RATINGS: 25mA @24VDC. (Switch)
   100mA @50VDC. (Carry)
5. CONTACT MATERIAL:
   CONTACTS: (MOVABLE) GOLD PLATE
   TERMINALS: GOLD PLATE
6. INSULATION RESISTANCE;
   100 MEGA-OHMS MIN. @500VDC
7. CONTACT RESISTANCE;
   50 mILLI-OHMS TYPICAL @2-4VDC @100mA
8. OPERATING TEMP.;
   -40°C to +80°C
▲9. PACKAGE: IN DISPENSING TUBES
   WITH ALL POLES IN THE "OFF" POSITION.
▲10. TAPE SEAL FOR FLUX WASH.
11. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13541	RELEASED FOR PRODUCTION	10/17/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE	SCALE	DATE	DR	DWG	REV
KAS1103RT	2:1	10/17/03	AR	N311031	A