| MAPX | MODIFICATION | DATE |
|---|---|---|
| | | |

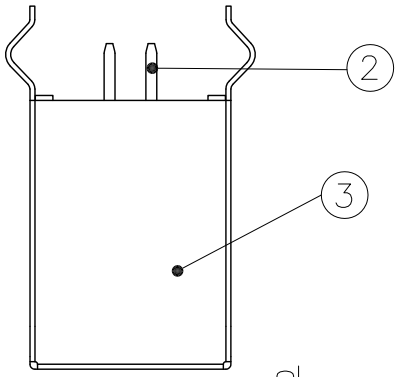


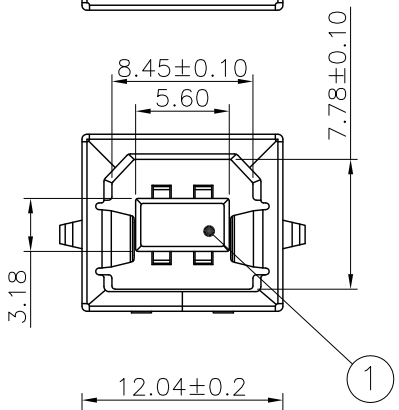


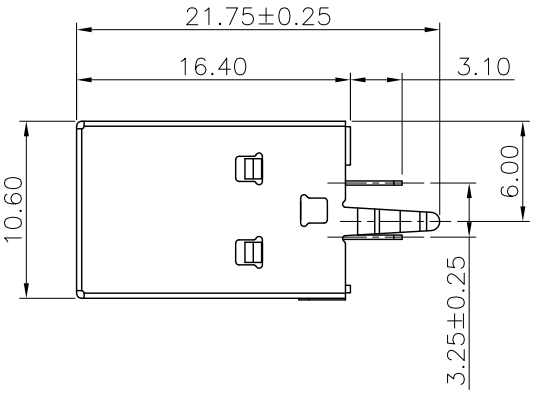


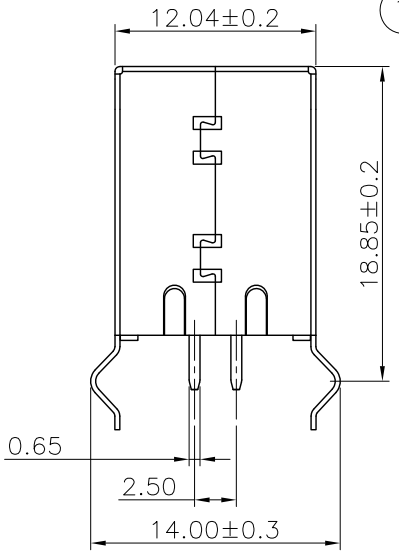


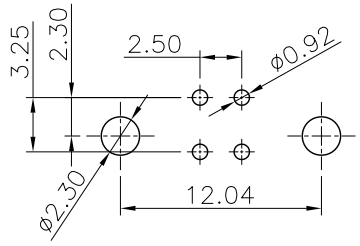


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

Specifications:

1. Current Rating: 1.0A at 30V AC.
2. Withstanding Voltage:
   500V AC for one minute.
3. Insulation Resistance: 1000MΩ Min.
4. Contact Resistance: 30mΩ Max.
5. Mating Force: 3.57kgf Max.
6. Unmating Force: 1.02kgf Min.

| NO. | DESCRIPTION | MATERIAL | COLOR | REMARK |
|---|---|---|---|---|
| 3 | 外壳 | SPCC | ——— | NICKEL/GOLD PLATED |
| 2 | 端子 | C5191 | ——— | GOLD/TIN PLATED |
| 1 | 胶芯 | PBT | WHITE/BLACK | UL 94V-0 |

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

| | | | |
|---|---|---|---|
| X. | ±0.35 | X. | ±5.° |
| .X | ±0.30 | .X | ±2.° |
| .XX | ±0.20 | .XX | ±1.° |
| .XXX | ±0.10 | .XXX | ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | Gavin | 制图料号 PRODUCT PART NO. | 921-111A1010Y10200 |
| 比例 SCALE | 1:1 | 审核 CHKD | 郭治富 | 产品名称 PRODUCT NO. | BF 180度铁壳弯脚白胶 |
| 日期 DATE | 2016-09-09 | 核准 APPD | 黄国荣 | 角法 VIEW | 版本 VER A□ |