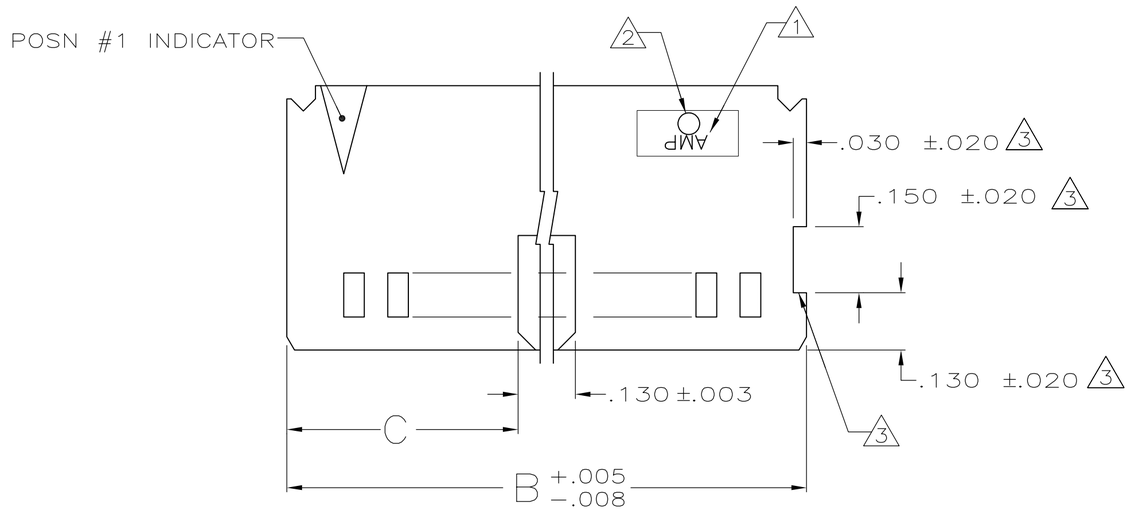
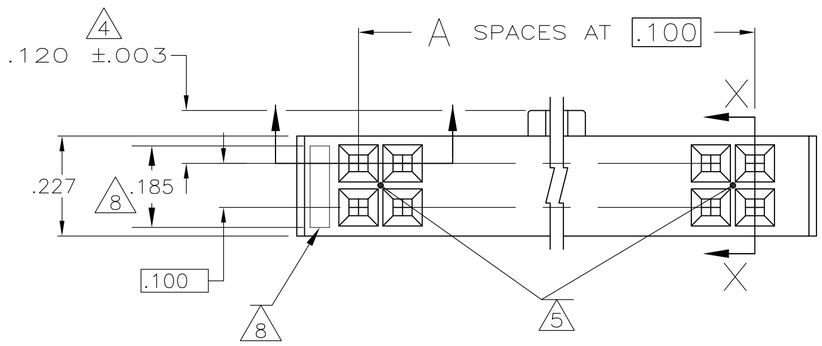
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

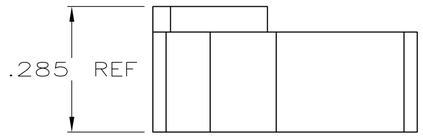
| LOC | DIST |
|---|---|
| AD | 39 |

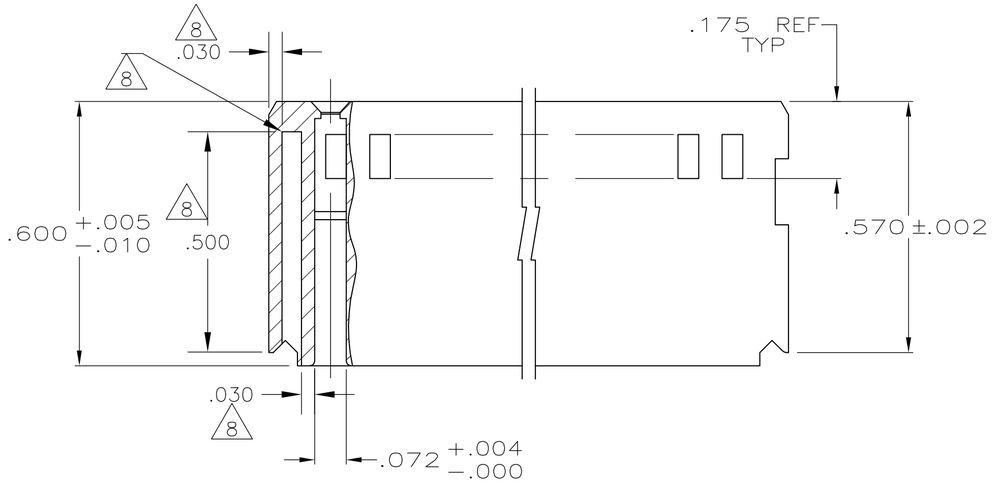
REVISIONS

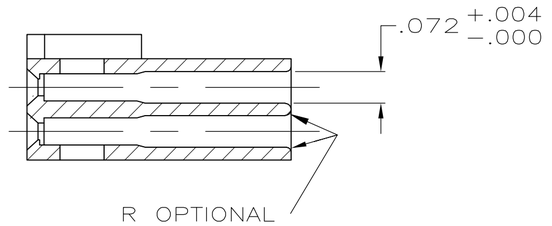
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | S2 | REVISED PER ECO-11-010839 | 25MAY11 | RK | HMR |




1. AMP TRADEMARK (MOLDED IN) .062±.015 HIGH CHARACTERS LOCATED APPROX AS SHOWN
2. MOLD CAVITY IDENT (MOLDED IN) .046±.015 HIGH CHARACTERS LOCATED APPROX AS SHOWN
3. RECESSED AREA AROUND MOLD GATE IS OPTIONAL. THIS FEATURE IS ALLOWABLE ON EITHER SIDE OF HOUSING OR MAY NOT BE PRESENT AT ALL.
4. COORDINATE DIMENSION APPLIES FROM CENTER OF FIRST ACTUAL FEATURE
5. RECESSED AREA AROUND GATE PERMISSIBLE. THIS FEATURE IS ALONG CENTERLINE OF MATING FACE.
6. WHEN MATING WITH AMP-LATCH UNIVERSAL HEADERS, P/N 1825851-1 MUST BE USED. PURCHASE SEPARATELY WITH HEADER- 2 REQUIRED.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
8. VOID CORING IS OPTIONAL, AT MOLDER'S DISCRETION.

| 7 | C | B | A | NO. OF POSN | PART NO. |
|---|---|---|---|---|---|
| OBSOLETE | .575 | 1.280 | 10 | 22 | ~~1-102387-5~~ |
| | .225 | .580 | 3 | 8 | 1-102387-4 |
| | 1.125 | 2.380 | 21 | 44 | 1-102387-3 |
| | 1.625 | 3.380 | 31 | 64 | 1-102387-2 |
| | 1.525 | 3.180 | 29 | 60 | 1-102387-1 |
| | 1.275 | 2.680 | 24 | 50 | 1-102387-0 |
| | 1.025 | 2.180 | 19 | 40 | 102387-9 |
| | .875 | 1.880 | 16 | 34 | 102387-8 |
| | .775 | 1.680 | 14 | 30 | 102387-7 |
| | .675 | 1.480 | 12 | 26 | 102387-6 |
| | .625 | 1.380 | 11 | 24 | 102387-5 |
| | .525 | 1.180 | 9 | 20 | 102387-4 |
| | .425 | .980 | 7 | 16 | 102387-3 |
| | .375 | .880 | 6 | 14 | 102387-2 |
| | .275 | .680 | 4 | 10 | 102387-1 |

102387

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK PER ASTM D4066

FINISH: -

DWN B MOYER 5-17-89
CHK K. HELM 6-13-89
APVD - -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME: HOUSING, CRIMP SNAP-IN, SHORT ENTRY, MOD IV -

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-102387 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV S2