

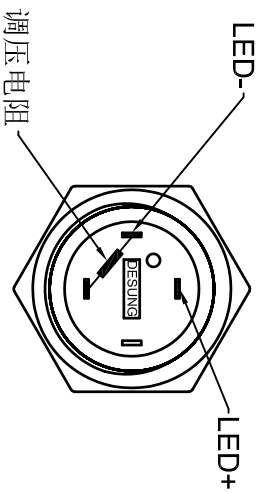
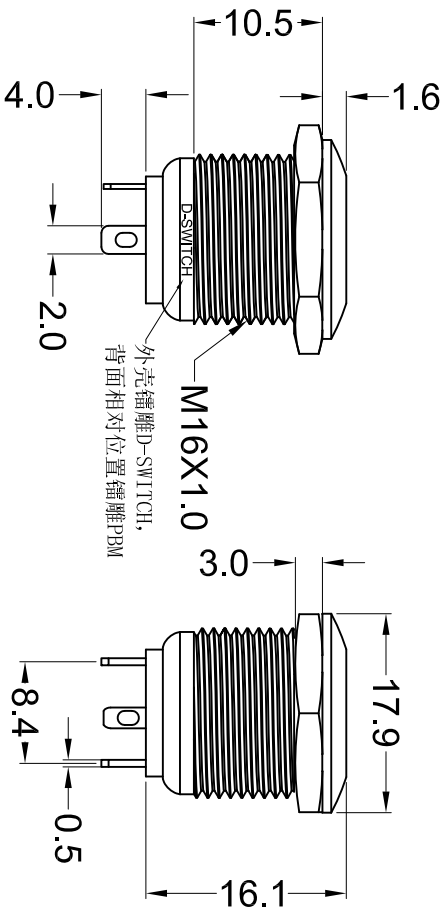


- 备注:
1. 外壳镗雕A3;
  2. 拧螺母, 配垫圈。

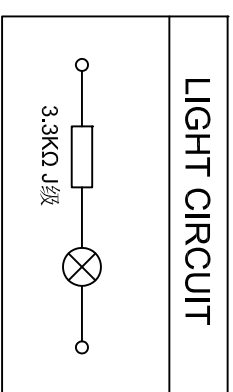

Nut Torque:5~14Nm  
 Protection Grade:IP65,IK08  
 Shell:Brass,Ni Plating  
 Base:PBT+15%GF  
 Lamp Type:LED  
 Forward current:20mA Max  
 Lamp Life:50000H  
 Beads Color:Green  
 Lamp voltage:24V  
 Operating Temperature:-20°C~80°C  
 Relative Air Humidity:45%~85%  
 Safety Approval:

CUT-OUT

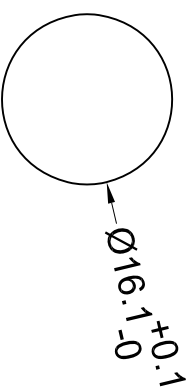

**D-SWITCH**  
 东莞市德祿电子有限公司  
 D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES .X±0.5 .XX±0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准 APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	品名 TITLE	图号 DRAWING NO
							PBM-16111-FS-G1-R24-B8S-A3-0004	1030438