



# MI4-EC12-DF series





**(98 x 125 x 150 mm)**

3.86 x 4.92 x 5.91 inches

- Construction: UL94V-0 plastic impeller
- Frame: die-cast alluminium alloy
- Motor Design: EC Three Phase Six Pole Motor
- Bearing option: 2 ball bearings
- Lead Wire: 1.5m Cable with Wall Plug
- Features: Speed Controller (5m Cord), auto-restart, soft start, IPX4

Model No.	Rated Voltage VAC	Freq. HZ	Input Power W	Rated Cur. A	Speed RPM	Air Volume		Max. Sta tic Pressure (H <sub>2</sub> O)		Sound Noise dbA	Wt . g
						M <sup>3</sup> /Min.	CFM	MM	INCH		
MI4-EC12-DF	110	50/60	18	0.27	5,000	4.531	160	33.75	1.33	56	1200

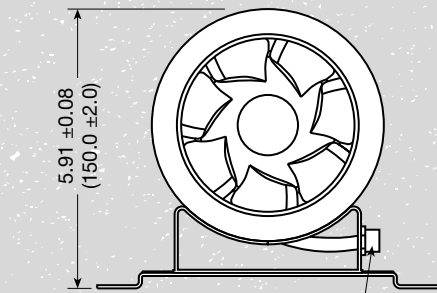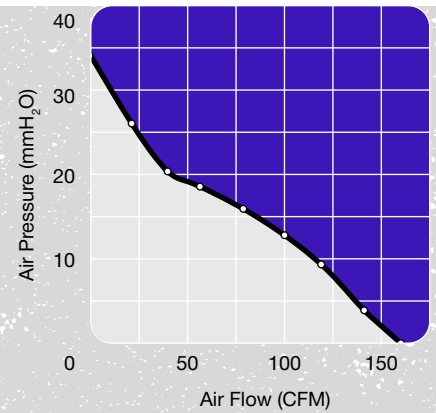

Speed control connector with 5m cable

