


# GE310-GNSS

GSM | GPRS **Embedded**

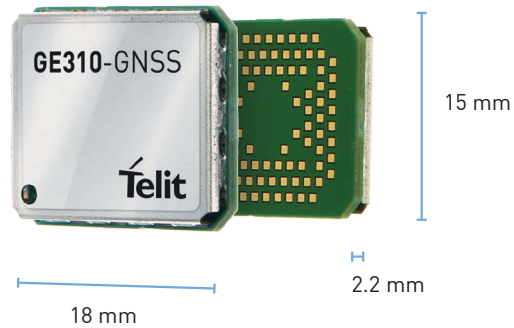

## Product Description

The GE310-GNSS is the first IoT module on the brand new Telit xE310 form factor. A tiny and future proof LGA packaging, suitable to accommodate future requirements of Mobile IoT and to support the next generations of chipset and features.

The GE310-GNSS combines a quad band GSM|GPRS module with ARM7 core, a Bluetooth transceiver and a multi-constellation GNSS receiver in a compact 15x18 mm package.

The GE310-GNSS's embedded GNSS receiver is able to navigate with GPS, GLONASS, Galileo and Beidou. GE310-GNSS can navigate with up to three constellations concurrently (GPS+GLONASS+Galileo or GPS+Beidou+ Galileo).

Moreover GE310-GNSS supports SBAS and A-GPS.

The product is highly recommended for new designs requiring quad band GSM|GPRS coverage in a compact and robust LGA package delivering easy integration and reduced impact on final application costs

## Key Benefits

- Automated manufacturing process friendly miniature and futureproof footprint
- BT 4.0 compliant
- GPS, GLONASS, Galileo and Beidou navigation
- Ideal solution for applications such as asset management, utilities and telematics
- Battery friendly operation with 2.8V GPIOs

AVAILABLE FOR

EMEA  
LATAM  
APAC

**Complete,  
Ready-to-Use Access  
to the Internet of Things**



## GE310-GNSS

### Product Features

- LGA form factor
- Quad band GSM | GPRS  
850/900/1800/1900 MHz
- Control via AT commands according  
to 3GPP TS 27.005, 27.007
- FTP/TCP/IP stack access via AT commands
- SIM application toolkit 3GPP TS 51.014
- Telephony, emergency call
- Half rate, full rate, enhanced full rate  
and adaptive multi rate voice codecs  
(HR, FR, EFR, AMR)
- Point-to-point mobile originated and mobile  
terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode
- SMS over GPRS
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character set

### GNSS

#### GPS, GLONASS, Galileo and Beidou navigation

- Satellite Augmentation system (SBAS)
- A-GPS file injection from server (14 days)
- On-board ephemeris computation up to  
3 days
- GPS L1, GLONASS L1, Galileo E1, BDS B1
- Pre-select SAW filter
- Cold start at -148dBm

### Bluetooth

- Fully compliant with BT 4.0 specification
- Low out-of-Band spurious emissions  
support simultaneous operations with GPS  
and GSM/ GPRS radio system
- Low-IF architecture with high degree of  
linearity and high order channel filter
- Fully integrated PA provides 7.5dBm output  
power

- -95dBm sensitivity with excellent interference  
rejection performance
- Hardware AGC dynamically adjust receiver  
performance in changing environments
- Up to 4 simultaneous active ACL links
- Up to 1 simultaneous SCO or eSCO link with  
CSVD coding
- Scatter net support Up to 4 piconets  
simultaneously with background inquiry/  
page scan
- Support sniff mode
- Ultra-low power consumption states

### Data

- V.110
- GPRS class 12
- Mobile station class B
- Coding scheme 1 to 4

### Environmental

- Dimensions: 15 x 18 x 2.2mm
- Extended temperature range  
-40°C to +85°C (operational)  
-40°C to +85°C (storage temperature)

### Interfaces

- 6 I/O ports maximum 2.8 V (logical level)
- Analog audio
- 1 A/O converter
- 1 DAC
- ITU-T V.24 serial link through CMOS UART  
- band rate from 300 to 115,200 bps

### Approvals

- RED directive
- GCF

### Electrical & Sensitivity

- Output power  
- Class 4 (2W) @ 850/900 MHz  
- Class 1 (1W) @ 1800/1900 MHz
- Supply voltage range  
- 3.4 - 4.2V DC (3.8V DC recommended)

**QUESTIONS? VISIT [WWW.TELIT.COM/CONTACT-US](http://WWW.TELIT.COM/CONTACT-US)**

[www.telit.com/facebook](https://www.telit.com/facebook) | [www.telit.com/linkedin](https://www.telit.com/linkedin) | [www.telit.com/twitter](https://www.telit.com/twitter)