UNIKC Semiconductor

P0510AT

N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
100V	5.5mΩ @V_{GS} = 10V	143A



TO-220



ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	100	V
Gate-Source Voltage		V_{GS}	±25	
Continuous Drain Current[2]	T_C = 25 °C	I_D	143	A
	T_C = 100 °C		90	
Pulsed Drain Current[1]		I_{DM}	350	
Avalanche Current		I_{AS}	36	
Avalanche Energy	L = 1mH	E_{AS}	648	mJ
Power Dissipation	T_C = 25 °C	P_D	227	W
	T_C = 100 °C		90	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		0.55	°C / W
Junction-to-Ambient	$R_{\theta JA}$		62.5	

[1]Pulse width limited by maximum junction temperature.

[2]Package limitation current is 111A.

UNIKC Semiconductor

RoHS Compliant

P0510AT

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	100			V
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	2	3	4	
Gate-Body Leakage	I_{GSS}	V_{DS} = 0V, V_{GS} = ±25V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 80V, V_{GS} = 0V			1	μA
		V_{DS} = 80V, V_{GS} = 0V , T_J = 125 °C			10	
Drain-Source On-State Resistance[1]	$R_{DS(ON)}$	V_{GS} = 7V, I_D = 15A		4.4	7.5	mΩ
		V_{GS} = 10V, I_D = 20A		4	5.5	
Forward Transconductance[1]	g_{fs}	V_{DS} = 10V, I_D = 20A		50		S
DYNAMIC						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		6716		pF
Output Capacitance	C_{oss}			851		
Reverse Transfer Capacitance	C_{rss}			555		
Gate Resistance	R_g	V_{GS} = 0V, V_{DS} = 0V, f = 1MHz		1		Ω
Total Gate Charge[2]	Q_g(V_{GS}=10V)	V_{DS} = 50V,I_D = 20A		146		nC
	Q_g(V_{GS}=7V)			113		
Gate-Source Charge[2]	Q_{gs}			30		
Gate-Drain Charge[2]	Q_{gd}			56		
Turn-On Delay Time[2]	$t_{d(on)}$	V_{DD} = 50V, I_D ≅ 20A, V_{GS} = 10V, R_{GEN} = 6Ω		98		nS
Rise Time[2]	t_r			194		
Turn-Off Delay Time[2]	$t_{d(off)}$			170		
Fall Time[2]	t_f			88		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C)						
Continuous Current[3]	I_S				143	A
Forward Voltage[1]	V_{SD}	I_F = 20A, V_{GS} = 0V			1.2	V
Reverse Recovery Time	t_{rr}	I_F = 20A, dIs/dt = 100A / μS		53		nS
Reverse Recovery Charge	Q_{rr}			98		nC

[1]Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

[2]Independent of operating temperature.

[3]Package limitation current is 111A.

UNIKC Semiconductor

RoHS Compliant

P0510AT

N-Channel Enhancement Mode MOSFET

Output Characteristics

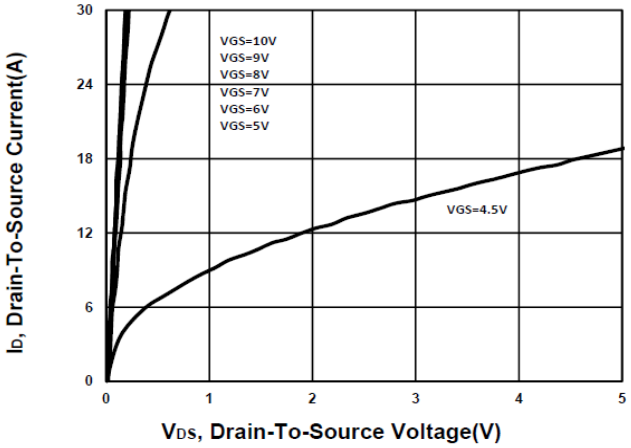

Transfer Characteristics

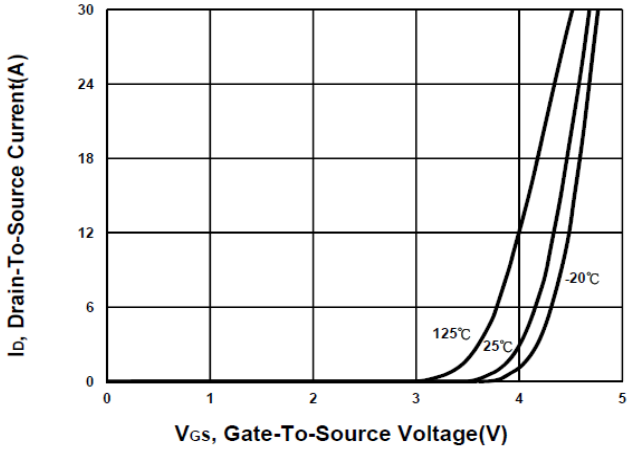

Gate charge Characteristics

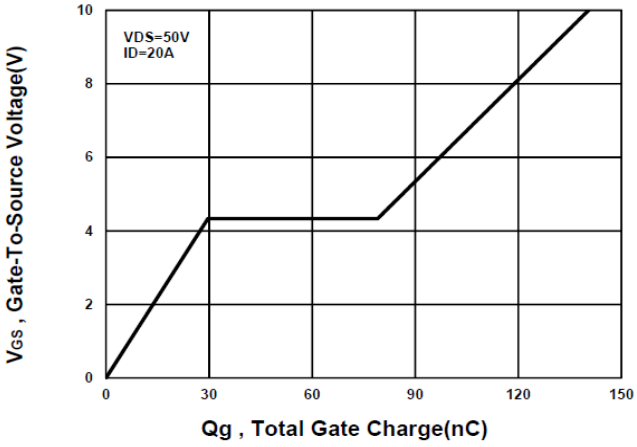

Capacitance Characteristic

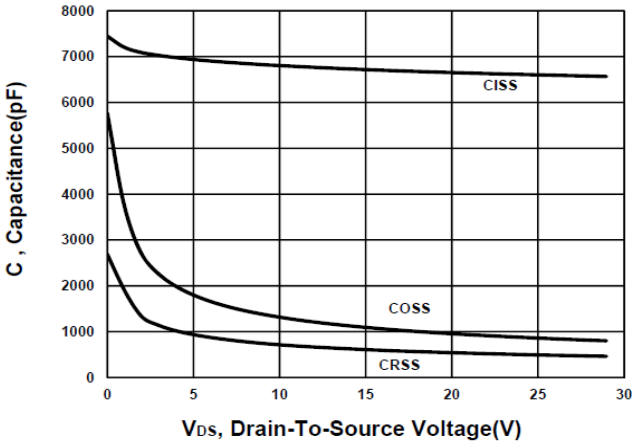

On-Resistance VS Gate-To-Source

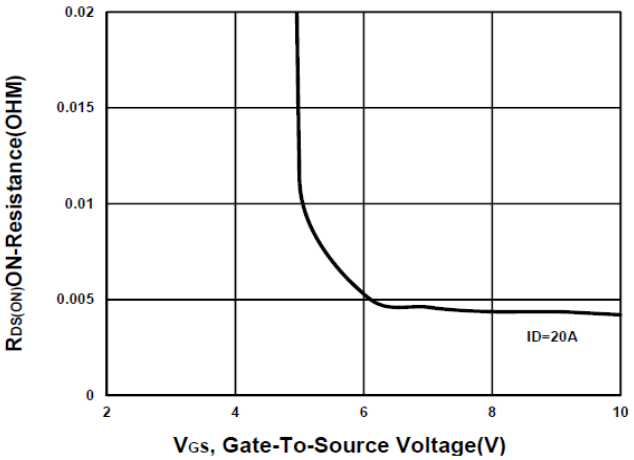

On-Resistance VS Drain Current

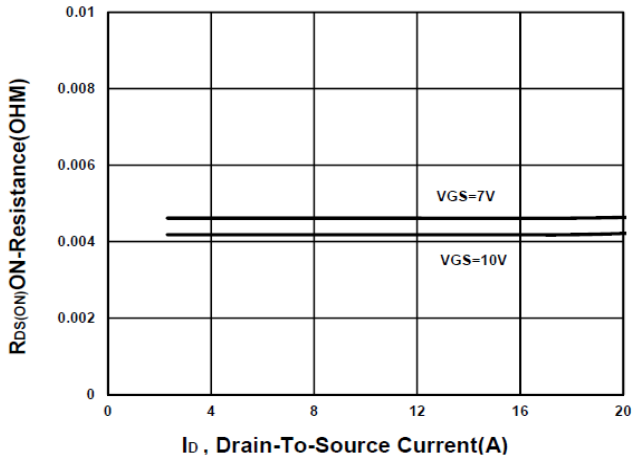

UNIKC Semiconductor

RoHS Compliant

P0510AT

N-Channel Enhancement Mode MOSFET

On-Resistance VS Temperature

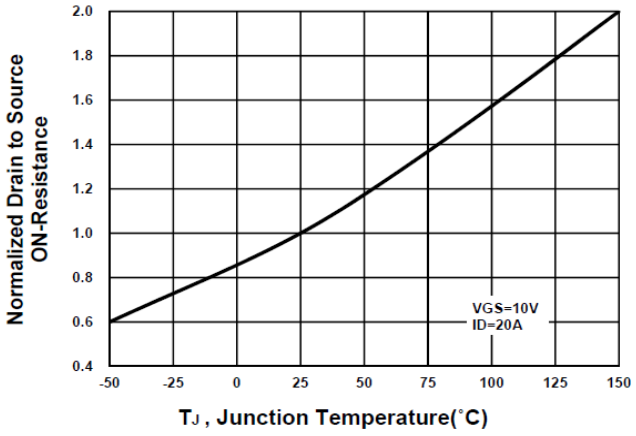

Source-Drain Diode Forward Voltage

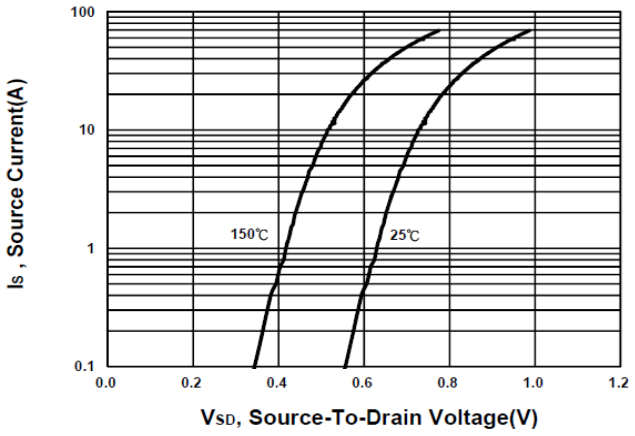

Safe Operating Area

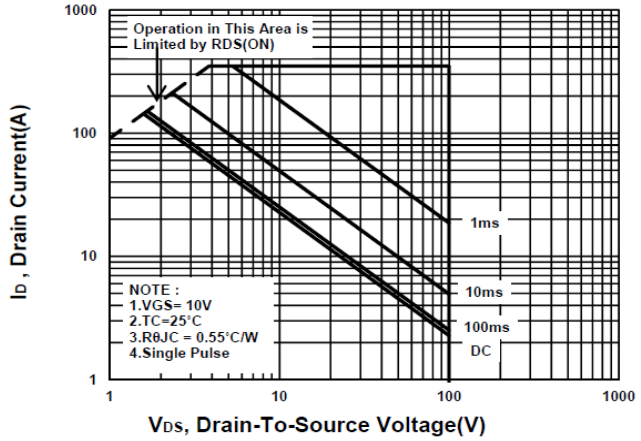

Single Pulse Maximum Power Dissipation

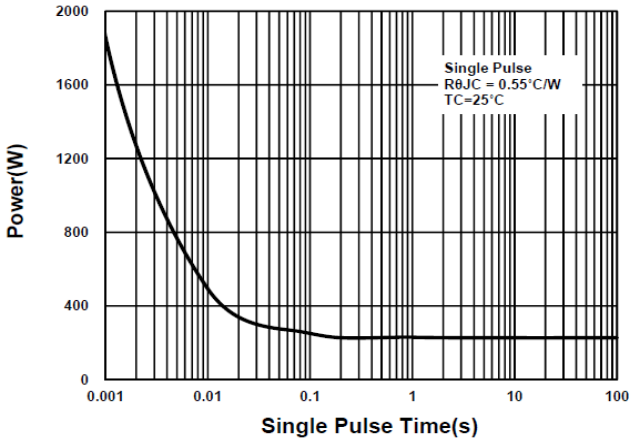

Transient Thermal Response Curve

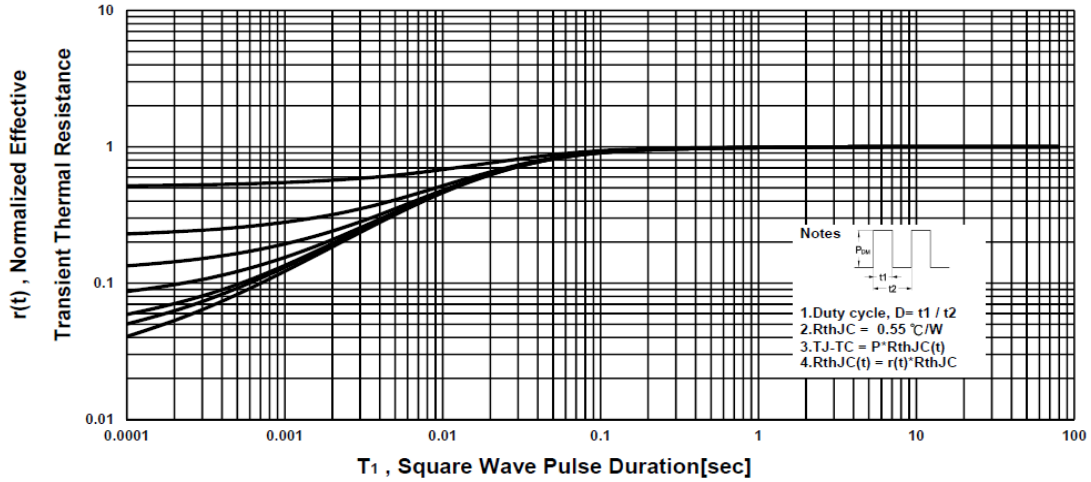

UNIKC Semiconductor

RoHS Compliant

P0510AT

N-Channel Enhancement Mode MOSFET

Package Dimension

TO-220 (3-Lead) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	9.65		11.5	J	3.55		4.83
B		2.54		K	1.11		1.45
C	18.1		22.86	L	1.89		3.09
D	26.9		31.24	M	0.34		0.61
E	14.32		16.51	N	2.6		4.06
F	8.38		9.3	O		3.7	
G	0.38		1.02	P	5.84		6.85
H	2.04	2.54	3.04	Q	12.5		14.73
I	1.14		1.8	R	11.3		13.31

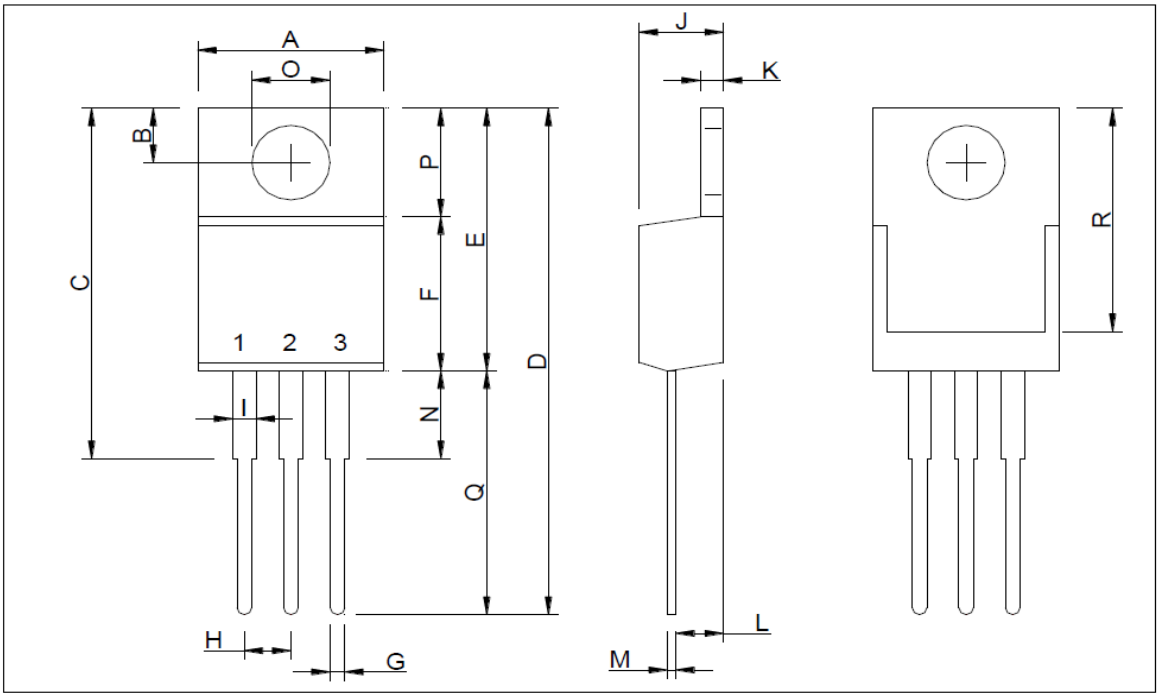

UNIKC Semiconductor

RoHS Compliant

P0510AT

N-Channel Enhancement Mode MOSFET

A. Marking Information

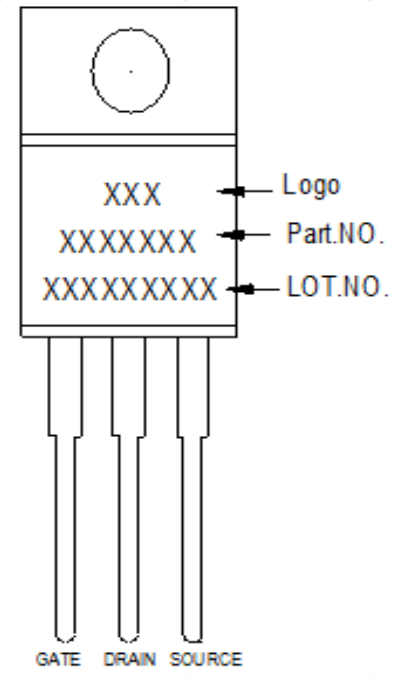

B. Tape&Reel Information:50pcs/Tube

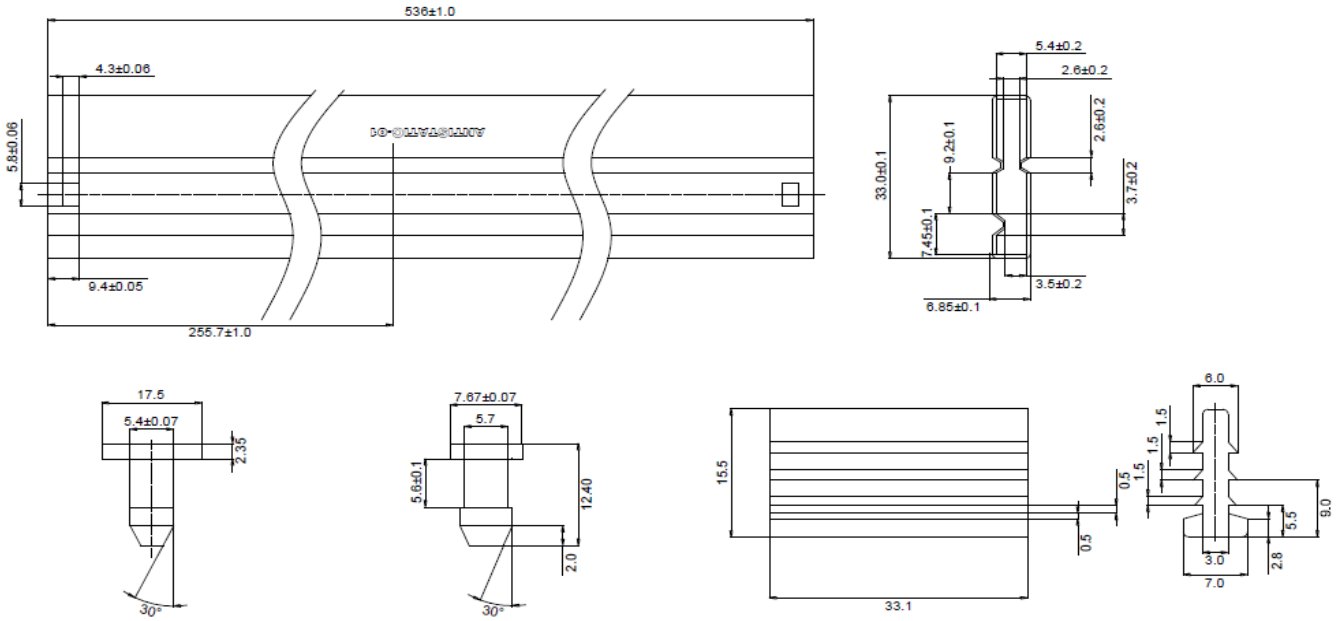

C. Lot No.&Date Code rule

1.Lot No.

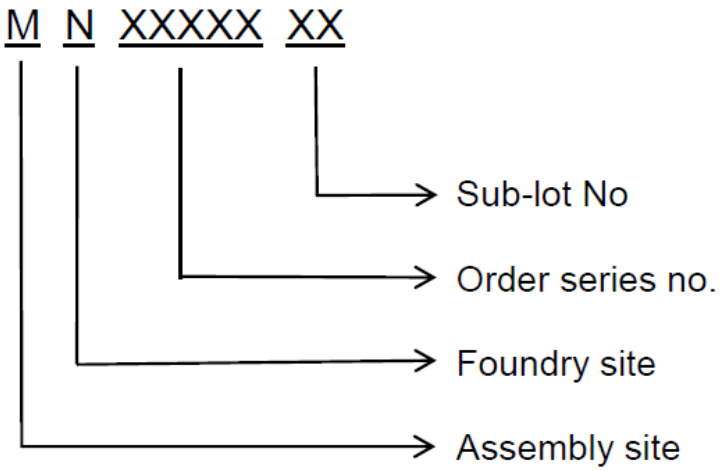

2.Date Code

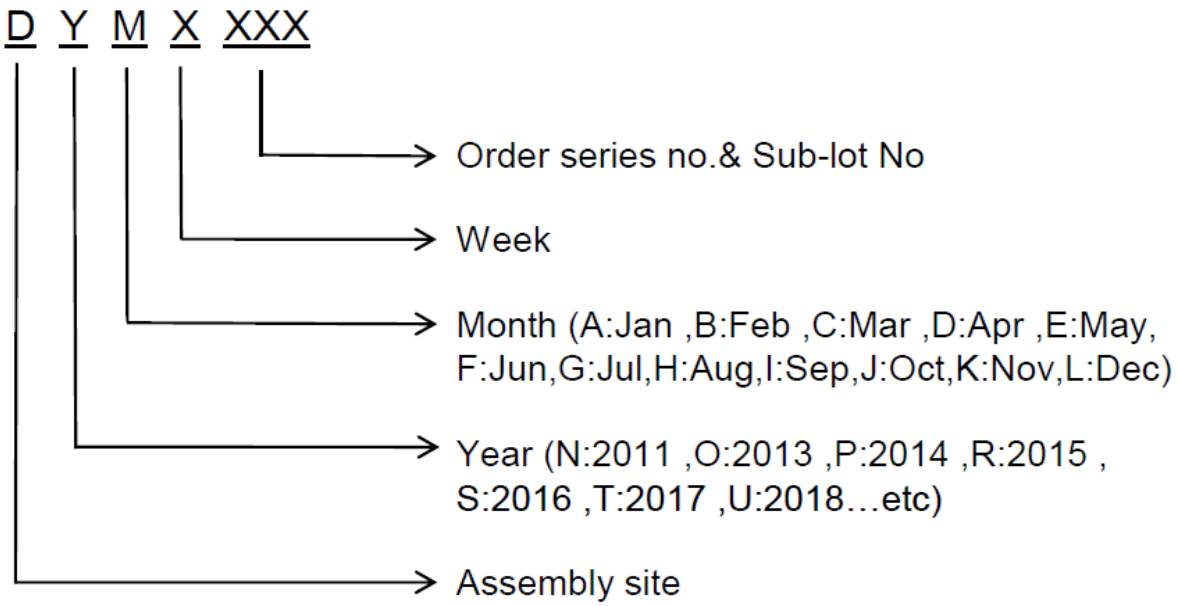

UNIKC Semiconductor

P0510AT

N-Channel Enhancement Mode MOSFET

D.Label rule

标签内容(Label content)

1	Label Size	30 * 90 mm
2	Font style	Times New Roman or Arial (或可区分英文”O”和数字”0”，”G和”Q”的字型即可)
3	U-NIKC	Height: 4 mm
4	Package	Height: 2 mm
5	Date	Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12
6	Device	Height: 3 mm (Max: 16 Digit)
7	Lot	Height: 3 mm (Max: 9 Digit) Sub lot
8	D/C	Height: 3 mm (Max: 7 Digit)
9	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed
10	RoHS label	RoHS long axis: 12 mm minor axis:6 mm bottom color: White Font color: Black Font style: Arial
11	Halogen Free label	G Diameter: 10 mm bottom color: Green Font color: Black Font style: Arial
12	Scan information	Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least