


SHEET 1 OF 1

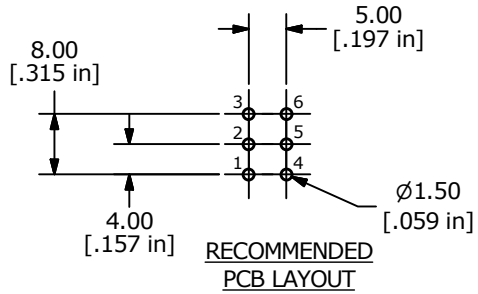

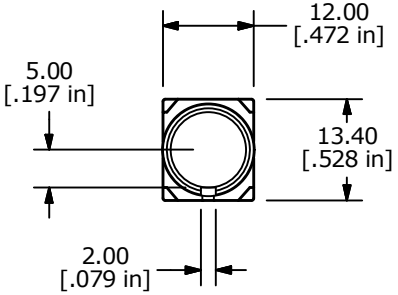





▲


SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-2; 4-5	2-3; 5-6


( ) DENOTES MOMENTARY FUNCTION



CIRCUIT: DPDT

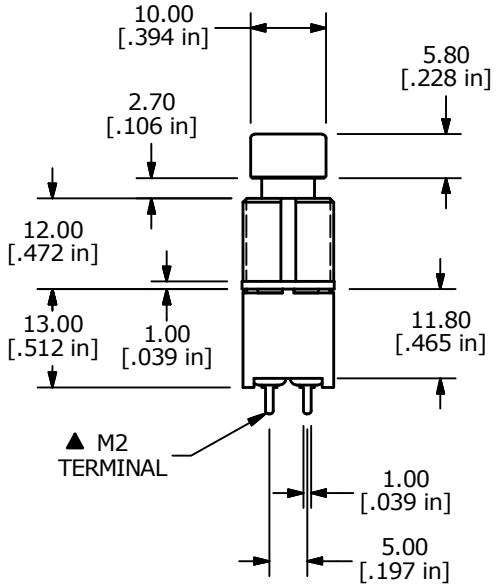

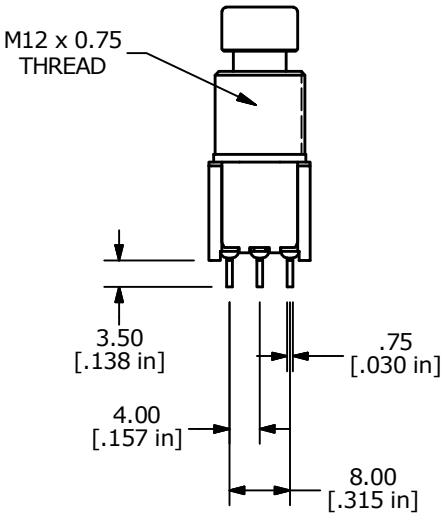

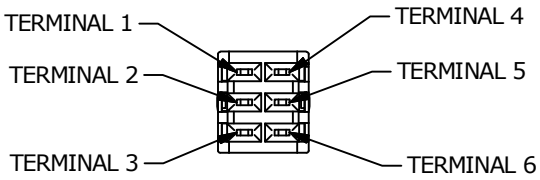

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 1A @ 9 VDC
6. ELECTRIC LIFE: 20,000 CYCLES
7. INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC.
8. ACUATION FORCE: 2500 ± 800gf
9. TRAVEL: 2.7mm
10. CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
11. DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -10°C to 70°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT.

REV	PCR NO	DESCRIPTION	DATE	BY
B	23409	correct PCB layout	6/14/18	MW
A	22609	New Release	1/5/17	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE FS5700DPMT2B2M2QE

SCALE	DATE	DR	DWG	REV
1:1	11/18/2016	rc	T790011	B