
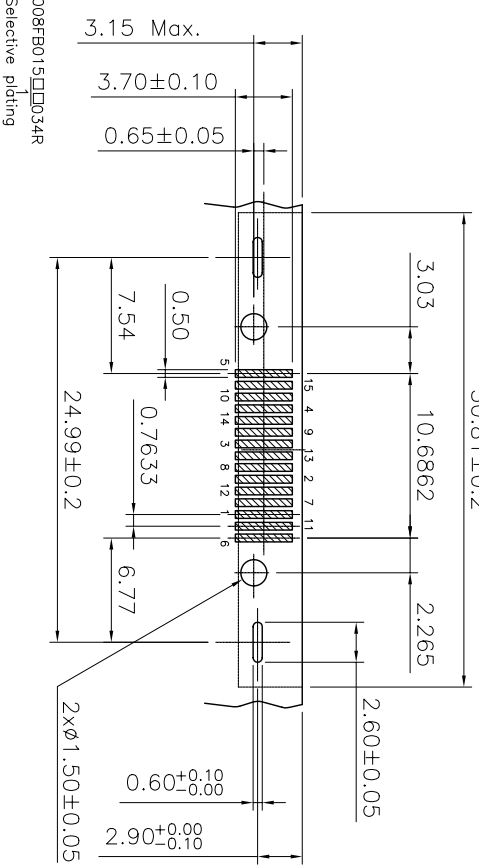
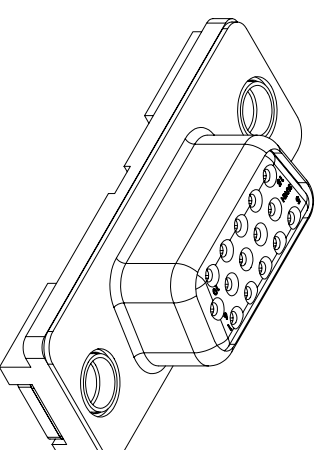



30.81 ± 0.2 

070008FB015□□034F

1. Selective piling
'S1,-55u' Min. gold in contact area/
100u' Min. Tin in solder area.
'S2,-60c' fish in contact area/
100u' Min. Tin in solder area.
'S3,-10u' Min. gold in contact area/
100u' Min. Tin in solder area.
'S4,-15u' Min. gold in contact area/
100u' Min. Tin in solder area.
'S5,-30u' Min. gold in contact area/
100u' Min. Tin in solder area.
'S6,-50u' Min. gold in contact area/
100u' Min. Tin in solder area.

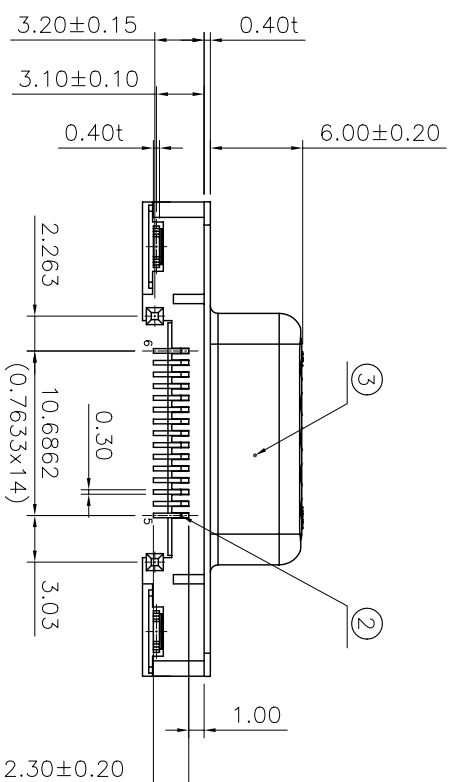

4	FORK	Brass	—	Tin Plated
3	Shell	Spcc	—	Nickel Plated
2	Terminal	Pho.Bronze	—	Gold/Tin Plated
1	Housing	NY-9T	Blue(650C)	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

— CONNECTOR

CUSTOMER COPY										TITLE: 15 PIN D-SUB Female SMD Type Conn.									
PART NO.										070008FB015SX034R									
PART NO. (OLD)										_____									
DRAWING NO.										070008FB015SX034R									
SCALE										4:1									
UNIT										mm									
A4																			
ECN NO.										REV									
DATE										DESCRIPTION									
CHANGE										APPRO.									
GENERAL TOLERANCE UNLESS OTHERWISE NOTED										Angle									
±2°										30 ~									
±0.50										10 ~ 30									
±0.30										~ 10									
±0.15										DRAW									
DESIGN										CHECK									
APPRO.										SCALE									