





1 AMP



2 AMP



6 AMP

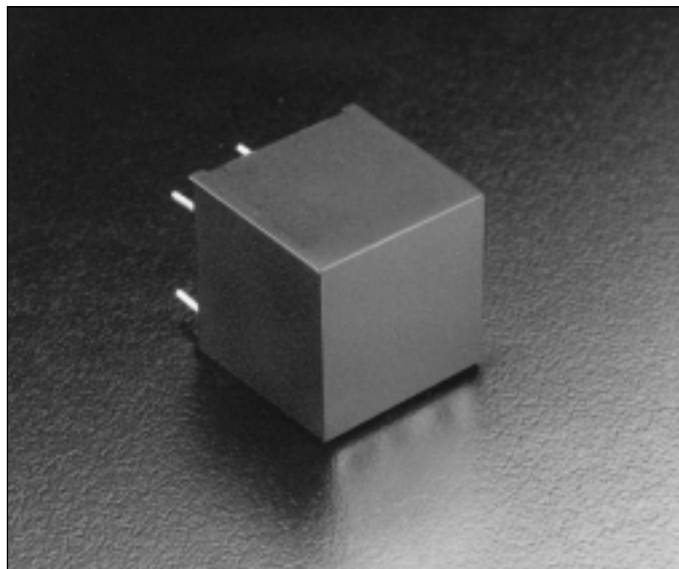

SF 3010	Rated Current A	Leakage Current @ 250V 50Hz	Inductance mH	Connections	Approvals	®
SF 3010-1/08	1	0.2mA	11	PCB Pins 0.8	■	■
SF 3010-2/08	2	0.2mA	2.0	PCB Pins 0.8	□	□
SF 3010-6/08	6	0.2mA	0.5	PCB Pins 0.8	□	□
SF 3010A-1/08	1	0.2mA	11	PCB Pins 0.6	■	■
SF 3010A-2/08	2	0.2mA	2.0	PCB Pins 0.6	□	□
SF 3010A-6/08	6	0.2mA	0.5	PCB Pins 0.6	□	□


Temperature Range: -25°C to +85°C
Operating Voltage: 250Vac
Operating Frequency: 0 to 400Hz
Test Voltage: L + N to ground, 2700Vdc, 2 seconds

■ Approved
□ Submitted for Approval


IEC 950 (EN 60950) Applications)

DIMENSIONS


All dimensions are nominal and in mm

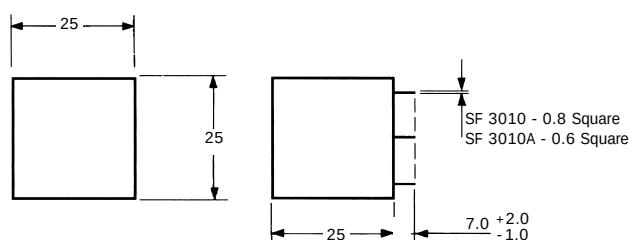

CIRCUIT DIAGRAM

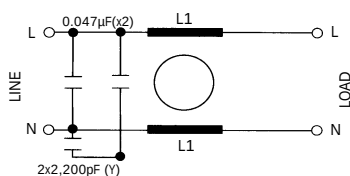

PIN CONNECTIONS

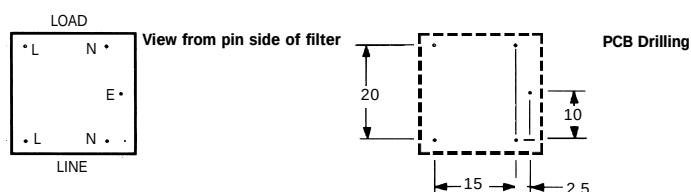

Revised 17/1/08