



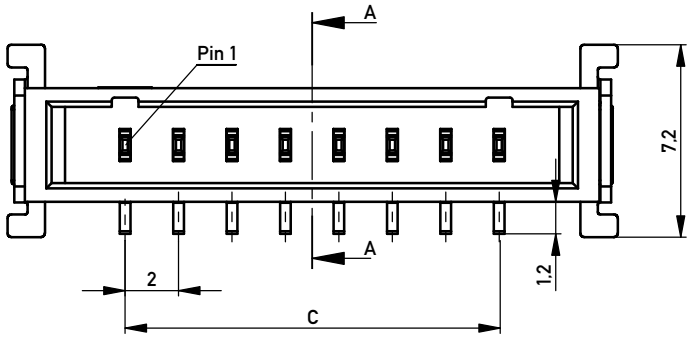


Verpackung Stange / *packaging tube*

8	27
6	33
5	37
4	42
3	49
2	58
Polzahl *No. of positions*	*Stück / pieces*


SCHNITT A-A



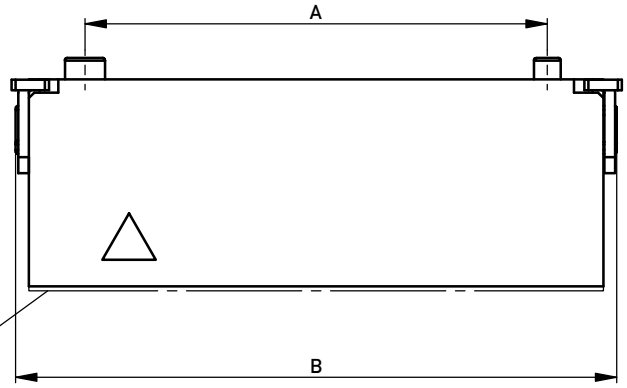


Klebestreifen für pick and place
tape for pick and place

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 400 Stück
Packaging unit: 400 pcs



Abspulrichtung - *Reel off Direction*

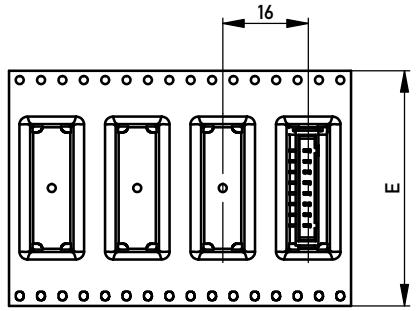

109906	109912	8	17,3	22,5	14	21,4	44
109905	109911	6	13,3	18,5	10	17,4	44
109904	109910	5	11,3	16,5	8	15,4	32
109903	109909	4	9,3	14,5	6	13,4	32
109902	109908	3	7,3	12,5	4	11,4	24
109901	109907	2	5,3	10,5	2	9,4	24
Ident-Nr. mit Haube *part-no.* ***tape &reel*** *with cap*	Ident.-Nr. ohne Haube *part-no.* ***tube*** *w/o cap*	Polzahl	Mass A	Mass B	Mass C	Mass D	Mass E

Material und Oberfläche:
Material and plating:


Gehäuse / *housing:* LCP, UL94V-0, natural
Kontakt / *contact:* Kupferlegierung 2,5µm verzinnt, 1,25µm Ni rundum
Copper alloy
2,5µm tin plating over 1,25µm Ni all over


Halteclip / *bracket:* 2,5µm verzinnt, 1,25µm Ni rundum
Copper alloy
2,5µm tin plating over 1,25µm Ni all over

Masse und Toleranzen in Übereinstimmung mit ANSI Y15.5M-1994 /
Interpret dimensions according to ANSI Y15.5M-1994

Layout:

vorgeschlagene Toleranz für PCB Layout ± 0,05
recommended PCB layout tolerance ±0,05

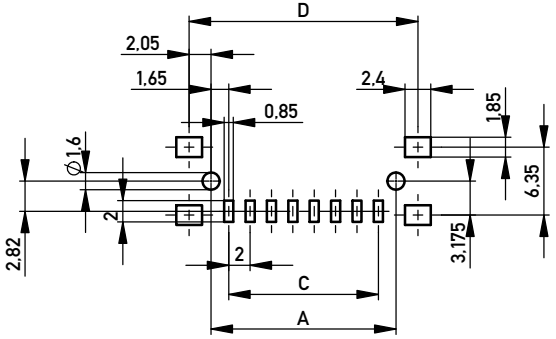



Information:

Tolerances

All Dimensions in mm

Scale 5:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

iBridge male 2mm pitch Single Row Vertical SMT

ERNI www.ERNI.com

109900

I

A3

Index | Date

Class IBRIDGE