
- 9, 15, 25, 37 or 50 way
- Selective Gold Plated Contacts (sold separately)
- Stamped & Formed Contacts
- Tin Plated Metal Housing
- Current Rating - 5Amps
- Low cost

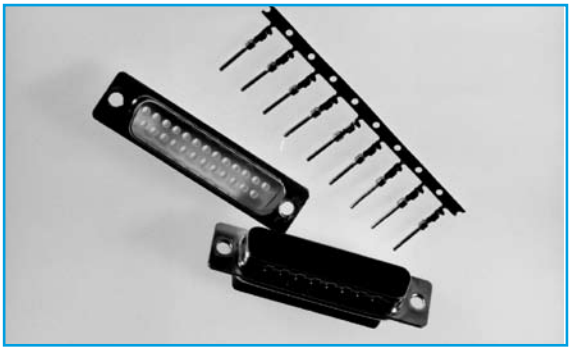

SPECIFICATION

Material:


Insulator:	PBT +30% Glass Fibre UL94V-0
Pin contacts:	Phosphor Bronze Gold Plated
Shell:	Steel, SPCC Nickel and Tin Plated


Electrical Data:


Rated Voltage:	350V AC
Rated Current:	5A
Withstand Voltage:	500V AC(rms)
Insulation Resistance:	Over 1000 MΩ
Contact Resistance:	5 MΩ at 1A
Temperature:	-20°C to 100°C

SECTION 11

OUTLINE DRAWING

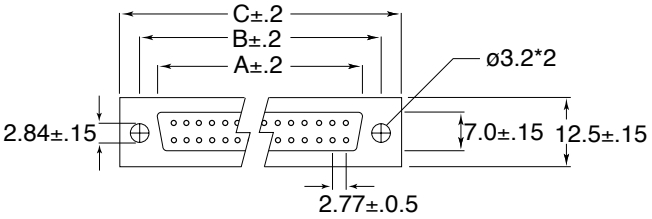

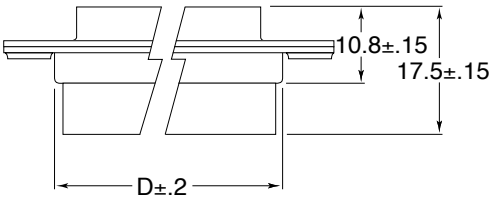



	A	B	C	D
9 WAY	16.92	25.00	30.80	19.20
15 WAY	25.25	33.30	39.20	27.70
25 WAY	38.96	47.10	53.10	41.10
37 WAY	55.42	63.50	69.40	57.30
50 WAY	52.81	61.00	67.00	55.10

Dimension - mm (Male)

	A	B	C	D
9 WAY	16.30	25.00	30.80	19.20
15 WAY	24.60	33.30	39.20	27.70
25 WAY	38.30	47.10	53.10	41.10
37 WAY	54.80	63.50	69.40	57.30
50 WAY	52.20	61.00	67.00	55.10

Dimension - mm (Female)

ORDERING INFORMATION

Housing

DBC	CD	M	09
Dubilier Connectors	Series Crimp Contact Housing	Contact Type M = Male(plug) F = Female(socket)	Nº of Ways 09 = 9 ways 15 = 15 ways 25 = 25 ways 37 = 37 ways 50 = 50 ways

Contacts

DBC	CD	M	PIN	XX	XX
Dubilier Connectors	Series Crimp Contact	Contact Type M = Male(plug) F = Female(socket)	Pin	Options Blank = Taped & Reeled A= Loose	Options Blank = 28/24 AWG 1= 24/20 AWG