P/N: S5969 DATA SHEET

Feature

- Fast rise time compatible with standards.
- Surface mount packages available.
- Operating temperature range: 0℃ to +70℃.
- Storage temperature range: -25℃ to +125℃.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±2%)	OCL (uH Min)	L.L (uH Max)	$C_{W/W}$ (pF Max)	Bandwidth with 75 Ω system (Typ)	PRI Pins	HI-POT (Vrms)
S5969	1:2CT	19	0.06	10	0.25-500MHz	4-6	1500

Schematic

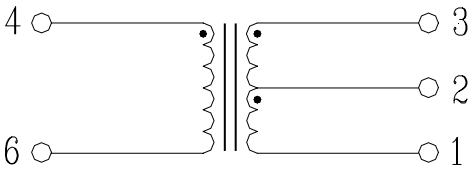

Mechanical

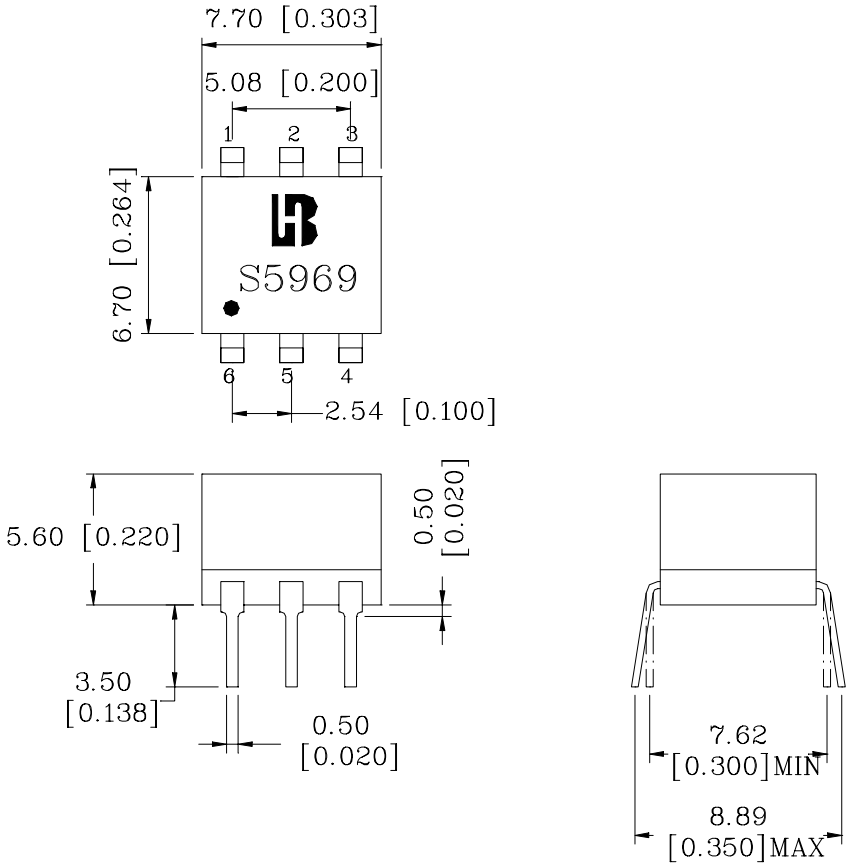

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]