

SN54ABT16260, SN74ABTH16260 12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

- Members of the Texas Instruments *Widebus™* Family
- State-of-the-Art *EPIC-II B™* BiCMOS Design Significantly Reduces Power Dissipation
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Latch-Up Performance Exceeds 500 mA Per JEDEC Standard JESD-17
- Typical V_{OLP} (Output Ground Bounce) < 1 V at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$
- High-Impedance State During Power Up and Power Down
- Distributed V_{CC} and GND Pin Configuration Minimizes High-Speed Switching Noise
- Flow-Through Architecture Optimizes PCB Layout
- High-Drive Outputs ($-32\text{-mA } I_{OH}$, $64\text{-mA } I_{OL}$)
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL) Package and 380-mil Fine-Pitch Ceramic Flat (WD) Package Using 25-mil Center-to-Center Spacings

SN54ABT16260 . . . WD PACKAGE
SN74ABTH16260 . . . DL PACKAGE
(TOP VIEW)

OE $\overline{A}$	1	56	OE2B
LE1B	2	55	LEA2B
2B3	3	54	2B4
GND	4	53	GND
2B2	5	52	2B5
2B1	6	51	2B6
V_{CC}	7	50	V_{CC}
A1	8	49	2B7
A2	9	48	2B8
A3	10	47	2B9
GND	11	46	GND
A4	12	45	2B10
A5	13	44	2B11
A6	14	43	2B12
A7	15	42	1B12
A8	16	41	1B11
A9	17	40	1B10
GND	18	39	GND
A10	19	38	1B9
A11	20	37	1B8
A12	21	36	1B7
V_{CC}	22	35	V_{CC}
1B1	23	34	1B6
1B2	24	33	1B5
GND	25	32	GND
1B3	26	31	1B4
LE2B	27	30	LEA1B
SEL	28	29	OE1B

description

The SN54ABT16260 and SN74ABTH16260 are 12-bit to 24-bit multiplexed D-type latches used in applications in which two separate data paths must be multiplexed onto, or demultiplexed from, a single data path. Typical applications include multiplexing and/or demultiplexing of address and data information in microprocessor or bus-interface applications. This device is also useful in memory-interleaving applications.

Three 12-bit I/O ports (A1–A12, 1B1–1B12, and 2B1–2B12) are available for address and/or data transfer. The output-enable ($\overline{OE1B}$, $\overline{OE2B}$, and $\overline{OE A}$) inputs control the bus-transceiver functions. The $\overline{OE1B}$ and $\overline{OE2B}$ control signals also allow bank control in the A-to-B direction.

Address and/or data information can be stored using the internal storage latches. The latch-enable (LE1B, LE2B, LEA1B, and LEA2B) inputs are used to control data storage. When the latch-enable input is high, the latch is transparent. When the latch-enable input goes low, the data present at the inputs is latched and remains latched until the latch-enable input is returned high.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus and EPIC-II B are trademarks of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated

SN54ABT16260, SN74ABTH16260

12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES

WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

description (continued)

When V_{CC} is between 0 and 2.1 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 2.1 V, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

The SN54ABT16260 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ABTH16260 is characterized for operation from -40°C to 85°C .

Function Tables

B TO A ($\overline{OEB} = \text{H}$)

INPUTS						OUTPUT A
1B	2B	SEL	LE1B	LE2B	$\overline{OEA}$	
H	X	H	H	X	L	H
L	X	H	H	X	L	L
X	X	H	L	X	L	A_0
X	H	L	X	H	L	H
X	L	L	X	H	L	L
X	X	L	X	L	L	A_0
X	X	X	X	X	H	Z


A TO B ($\overline{OEA} = \text{H}$)

INPUTS					OUTPUTS	
A	LEA1B	LEA2B	$\overline{OE1B}$	$\overline{OE2B}$	1B	2B
H	H	H	L	L	H	H
L	H	H	L	L	L	L
H	H	L	L	L	H	$2B_0$
L	H	L	L	L	L	$2B_0$
H	L	H	L	L	$1B_0$	H
L	L	H	L	L	$1B_0$	L
X	L	L	L	L	$1B_0$	$2B_0$
X	X	X	H	H	Z	Z
X	X	X	L	H	Active	Z
X	X	X	H	L	Z	Active
X	X	X	L	L	Active	Active

SN54ABT16260, SN74ABTH16260 12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

logic diagram (positive logic)

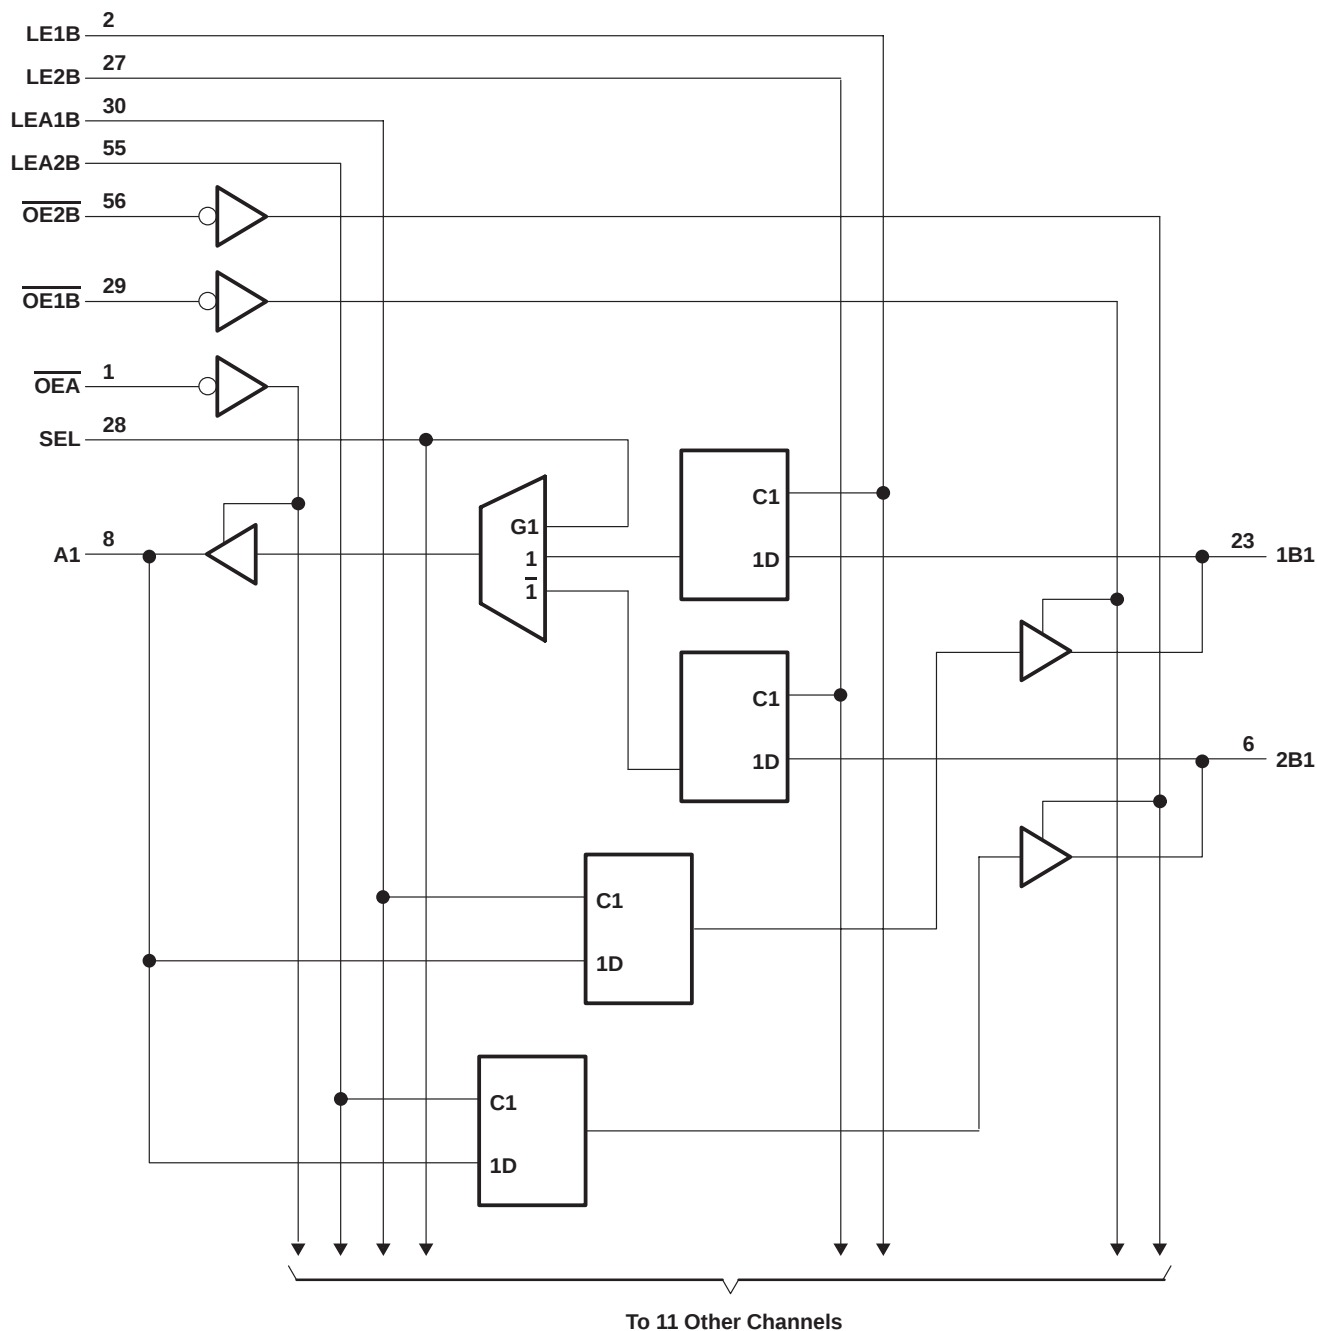

To 11 Other Channels

SN54ABT16260, SN74ABTH16260

12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES

WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	–0.5 V to 7 V
Input voltage range, V_I (see Note 1)	–0.5 V to 7 V
Voltage range applied to any output in the high or power-off state, V_O	–0.5 V to 5.5 V
Current into any output in the low state, I_O : SN54ABT16260	96 mA
SN74ABTH16260	128 mA
Input clamp current, I_{IK} ($V_I < 0$)	–18 mA
Output clamp current, I_{OK} ($V_O < 0$)	–50 mA
Package thermal impedance, θ_{JA} (see Note 2): DL package	74°C/W
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. The package thermal impedance is calculated in accordance with EIA/JEDEC Std JESD51.

recommended operating conditions (see Note 3)

		SN54ABT16260		SN74ABTH16260		UNIT
		MIN	MAX	MIN	MAX	
V_{CC}	Supply voltage	4.5	5.5	4.5	5.5	V
V_{IH}	High-level input voltage	2		2		V
V_{IL}	Low-level input voltage		0.8		0.8	V
V_I	Input voltage	0	V_{CC}	0	V_{CC}	V
I_{OH}	High-level output current		–24		–32	mA
I_{OL}	Low-level output current		48		64	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled			10	ns/V
$\Delta t/\Delta V_{CC}$	Power-up ramp rate	200		200		μs/V
T_A	Operating free-air temperature	–55	125	–40	85	°C

NOTE 3: Unused control inputs must be held high or low to prevent them from floating.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54ABT16260, SN74ABTH16260
12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES
WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A = 25°C			SN54ABT16260		SN74ABTH16260		UNIT
			MIN	TYP†	MAX	MIN	MAX	MIN	MAX	
V _{IK}		V _{CC} = 4.5 V, I _I = –18 mA			–1.2		–1.2		–1.2	V
V _{OH}		V _{CC} = 4.5 V, I _{OH} = –3 mA	2.5			2.5		2.5		V
		V _{CC} = 5 V, I _{OH} = –3 mA	3			3		3		
		V _{CC} = 4.5 V	2			2				
									2	
V _{OL}		V _{CC} = 4.5 V			0.36		0.5			V
					0.55*				0.55	
V _{hys}				100						mV
I _I	Control inputs	V _{CC} = 0 to 5.5 V, V _I = V _{CC} or GND			±1		±1		±1	μA
	A or B ports	V _{CC} = 2.1 V to 5.5 V, V _I = V _{CC} or GND			±20		±100		±20	
I _I (hold)	A or B ports	V _{CC} = 4.5 V				100		100		μA
						–100		–100		
I _{OZPU} ‡		V _{CC} = 0 to 2.1 V, V _O = 0.5 V to 2.7 V, $\overline{OE} = X$			±50		±50		±50	μA
I _{OZPD} ‡		V _{CC} = 2.1 V to 0, V _O = 0.5 V to 2.7 V, $\overline{OE} = X$			±50		±50		±50	μA
I _{OZH} §		V _{CC} = 2.1 V to 5.5 V, V _O = 2.7 V, $\overline{OE} \geq 2$ V			10		10		10	μA
I _{OZL} §		V _{CC} = 2.1 V to 5.5 V, V _O = 0.5 V, $\overline{OE} \geq 2$ V			–10		–10		–10	μA
I _{off}		V _{CC} = 0, V _I or V _O ≤ 4.5 V			±100				±100	μA
I _{CEX}		V _{CC} = 5.5 V, V _O = 5.5 V			50		50		50	μA
I _O ¶		V _{CC} = 5.5 V, V _O = 2.5 V	–50	–100	–225	–50	–225	–50	–225	mA
I _{CC}		V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND			1.5			1.5		mA
					63			63		
					1			1		
ΔI _{CC} #		V _{CC} = 5.5 V, One input at 3.4 V, Other inputs at V _{CC} or GND			1.5		1.5		1.5	mA
C _i		V _I = 2.5 V or 0.5 V			3					pF
C _{io}		V _O = 2.5 V or 0.5 V			11.5					pF

* On products compliant to MIL-PRF-38535, this parameter does not apply.

† All typical values are at V_{CC} = 5 V.

‡ This parameter is characterized, but not production tested.

§ The parameters I_{OZH} and I_{OZL} include the input leakage current.

¶ Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

This is the increase in supply current for each input that is at the specified TTL voltage level rather than V_{CC} or GND.

SN54ABT16260, SN74ABTH16260

12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES

WITH 3-STATE OUTPUTS

SCBS204C – JUNE 1992 – REVISED MAY 1997

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

		$V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}^\dagger$		SN54ABT16260		SN74ABTH16260		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t_w	Pulse duration, LE1B, LE2B, LEA1B, or LEA2B high	3.3		3.3		3.3		ns
t_{su}	Setup time, data before LE1B, LE2B, LEA1B, or LEA2B↓	1.5		2		1.5		ns
t_h	Hold time, data after LE1B, LE2B, LEA1B, or LEA2B↓	1		1.5		1		ns

[†] These values apply only to the SN74ABTH16260.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50\text{ pF}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	SN54ABT16260					UNIT
			V _{CC} = 5 V, T _A = 25°C			MIN	MAX	
			MIN	TYP	MAX			
t _{PLH}	A or B	B or A	1	3.1	5.3	1	5.9	ns
t _{PHL}			1	3.4	5.4	1	6.3	
t _{PLH}	LE	A or B	1.1	3.2	5.4	1.1	6.6	ns
t _{PHL}			1.1	3.3	5.3	1.1	5.9	
t _{PLH}	SEL (B1)	A	1.3	3.2	5.1	1.3	5.4	ns
	SEL (B2)		1.1	3.4	5.4	1.1	6.3	
t _{PHL}	SEL (B1)		1.5	3.1	4.6	1.5	5	
	SEL (B2)		1.6	3.6	5.3	1.6	6.2	
t _{PZH}	$\overline{\text{OE}}$	A or B	1	3.3	5.6	1	6.4	ns
t _{PZL}			1.6	3.8	5.9	1.6	6.5	
t _{PHZ}	$\overline{\text{OE}}$	A or B	2.2	4.1	5.9	2.2	7.5	ns
t _{PLZ}			1.3	3.2	5	1.3	5.4	

switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50\text{ pF}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	SN74ABTH16260					UNIT
			V _{CC} = 5 V, T _A = 25°C			MIN	MAX	
			MIN	TYP	MAX			
t _{PLH}	A or B	B or A	1	3.1	4.8	1	5.6	ns
t _{PHL}			1	3.4	5	1	5.9	
t _{PLH}	LE	A or B	1.1	3.2	4.9	1.1	5.8	ns
t _{PHL}			1.1	3.3	4.9	1.1	5.3	
t _{PLH}	SEL (B1)	A	1.3	3.2	4.6	1.3	5.3	ns
	SEL (B2)		1.1	3.4	4.9	1.1	6	
t _{PHL}	SEL (B1)		1.5	3.1	4.4	1.5	4.4	
	SEL (B2)		1.6	3.6	5.1	1.6	5.9	
t _{PZH}	$\overline{\text{OE}}$	A or B	1	3.3	4.7	1	5.7	ns
t _{PZL}			1.6	3.8	5.1	1.6	5.8	
t _{PHZ}	$\overline{\text{OE}}$	A or B	2.2	4.1	5.4	2.2	6.4	ns
t _{PLZ}			1.3	3.2	4.4	1.3	4.8	



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


SN54ABT16260, SN74ABTH16260

12-BIT TO 24-BIT MULTIPLEXED D-TYPE LATCHES

WITH 3-STATE OUTPUTS


SCBS204C – JUNE 1992 – REVISED MAY 1997

PARAMETER MEASUREMENT INFORMATION

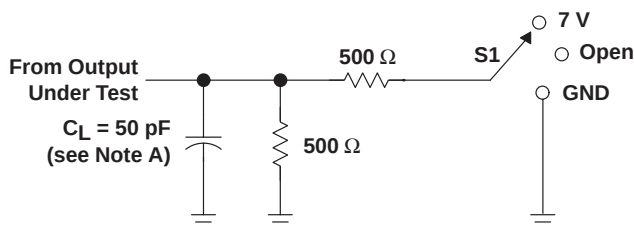


LOAD CIRCUIT


TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	7 V
t_{PHZ}/t_{PZH}	Open

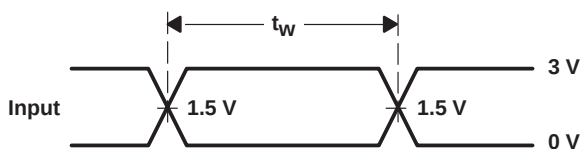


VOLTAGE WAVEFORMS
PULSE DURATION

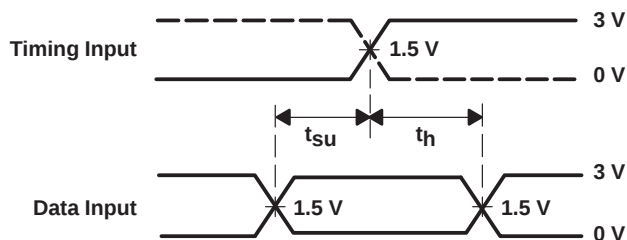

VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

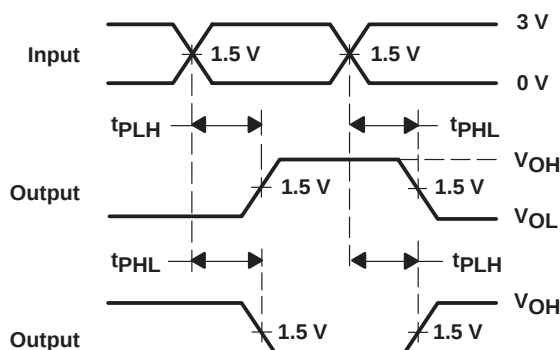

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES
INVERTING AND NONINVERTING OUTPUTS

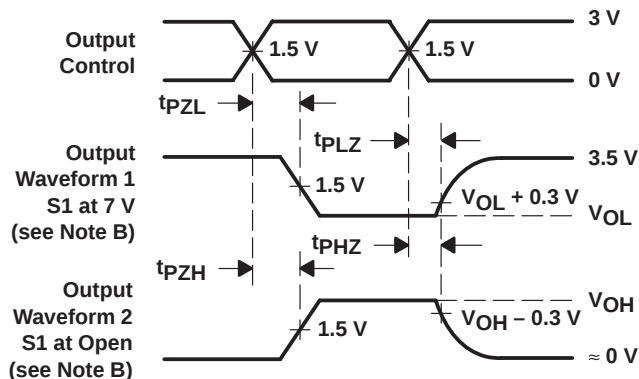

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES
LOW- AND HIGH-LEVEL ENABLING

- NOTES: A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.
- D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.