

Pb Free Plating Product

GB302N/GB303N/GB304N/GB305N/GB306N



30 Ampere Standard Type Negative Block Rectifier Diodes for Mitsubishi Alternator

**Feature:**

- ◆ Low leakage
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High forward surge current capability


**Application:**

- ◆ Block Diode/Alternator Diode with AEC-Q101 Grade Quality
- ◆ Stack Silicon Diffused Diode alternative
- ◆ Special for Automotive AC Alternator rectifier application

**Mechanical Data:**

- ◆ Technology: Latest Glass Passivation Pellet/Cu Clip Bonding
- ◆ Case: Vacuum soldered/sintered temperature < 260
- ◆ Cathode Polarity: As marked on body
- ◆ Lead: Plated lead, solderable per MIL-STD-202E method 208C
- ◆ Mounting: BLOCK/TO-230/BA/MR/K series package type

BLOCK/TO-230/BA/MR/K series

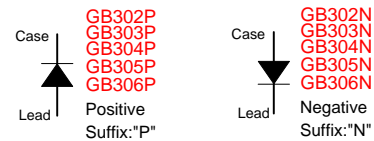

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%


	SYMBOLS	GB302N	GB303N	GB304N	GB305N	GB306N	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	200	300	400	500	600	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	140	210	280	350	420	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current, At T <sub>c</sub> = 105°C	I <sub>o</sub>	30					Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	400					Amps
Rating for fusing (t<8.3ms)	I <sup>2</sup> t	664					A <sup>2</sup> S
Maximum Instantaneous Forward Voltage Drop at 100A	V <sub>F</sub>	1.10					Volts
Maximum DC Reverse Current at Rated TA=25°C	I <sub>R</sub>	5.0					μA
DC Blocking Voltage TA=100°C		100					
Typical Thermal Resistance	R <sub>θJL</sub>	1.0					°C/W
Operating and Storage Temperature Rang	T <sub>L</sub> , T <sub>STG</sub>	(-65 to +175)					°C

**NOTES:**


1.Enough heatsink must be considered in application.

## RATINGS AND CHARACTERISTIC CURVES GB302N thru GB306N


F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE

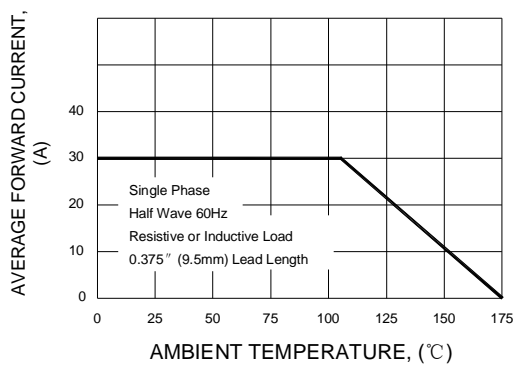


F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

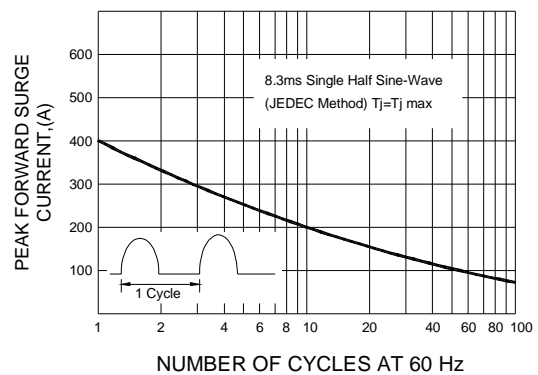


F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

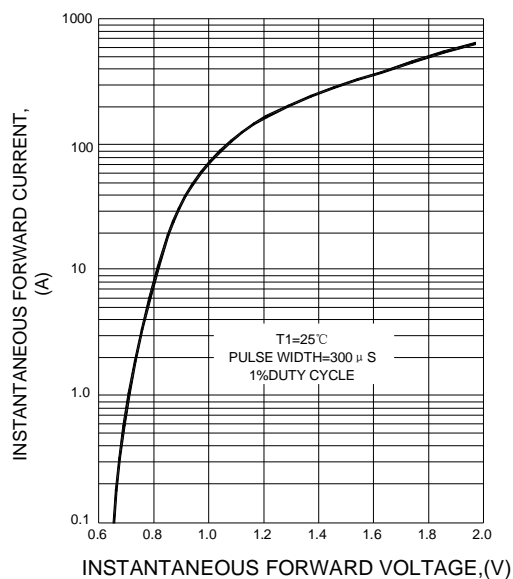

F1G.4 FORWARD ROWER DISSIPATION

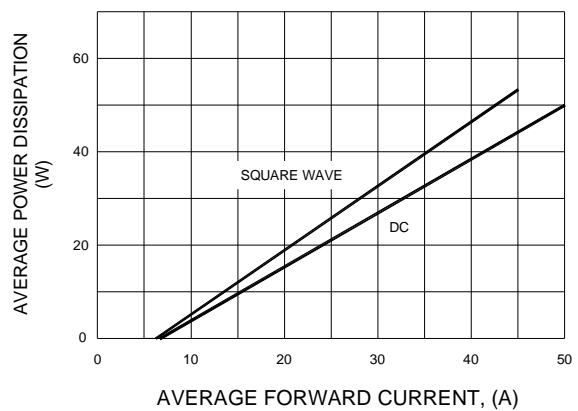

BLOCK/TO-230/BA/MR/K Series Package Outline

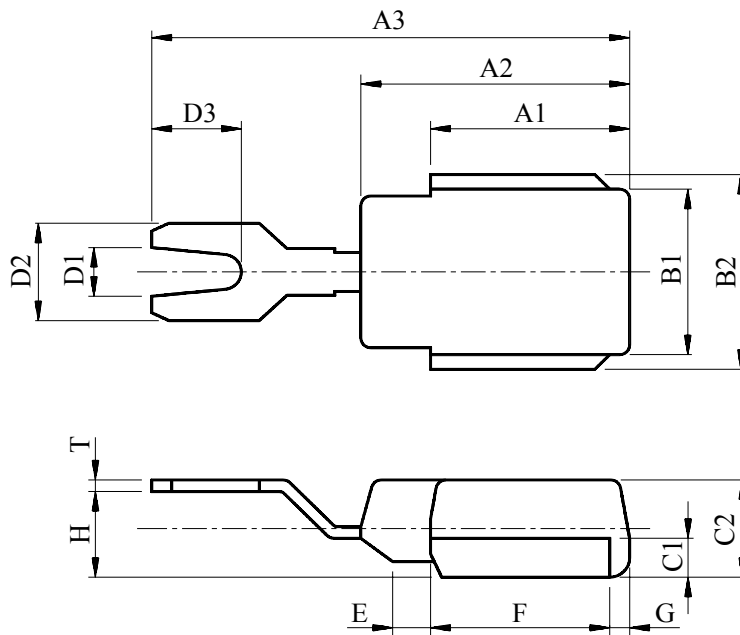

DIM	MILLIMETERS	DIM	MILLIMETERS
A1	10.0±0.3	D2	5.0±0.3
A2	13.5±0.3	D3	4.5±0.3
A3	24.0±0.5	E	1.9±0.3
B1	8.5±0.3	F	9.0±0.3
B2	10.0±0.3	G	1.0±0.3
C1	2.0±0.3	H	4.4±0.5
C2	5.0±0.3	T	0.6±0.3
D1	2.5±0.3		