



短脚为负极  
长脚为正极

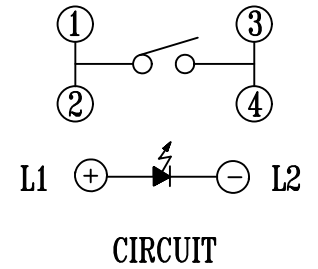

P. C. B. LAYOUT

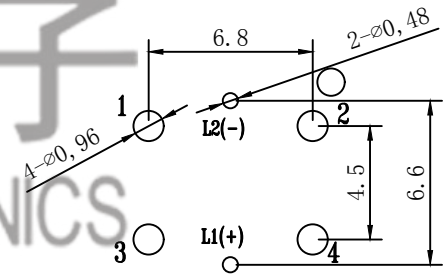

INTENSITY 光度		
C	D	E
160±50	200±50	250±50

LED COLOR										
1	2	3	4	5	6	12	13	14	23	
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green	

Lamp life(Forward current 20mA): 80000小时

TRAVEL: 0.25±0.1mm

NO.	PART	NAME	MATERIAL	QTY	FINISHING	TOLERANCE UNLESS SPECIFIED		REVISIONS		HAOYU(HONGKONG)LIMITED		PRO.AGL:	REV :A2
5	LED	BCXZ3361-LA5.0-NC		1	White	UP TO 5mm: ±0.1	ANGULAR ±1°	A2	2021.12.7	增加正负极标注及尺寸	WM		
4	CONTACT	SUS		1		ABOVE 5mm: ±0.2		A1	2019.12.19	更新电路图	XYZ		
3	TERMINAL	PBS		4	Ag-PLATED			NO	DATE		BY	APPD	
2	BUTTON	PA66/PA9T		1		TITLE: TACT SWITCH		UNIT : MM		ROHS COMPLIANT	DWN		
1	HOUSING	PA66/PA9T		1		MODEL: TC-1194-L-E		SCALE: 1:1		CHK'D			
HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司											APPD		
											PRO.AGL:		REV :A2