Double Balanced Mixers
B50V
5.0 to 18.0 GHz



Specifications


RF Frequency	5.0 to 18.0 GHz
LO Frequency	5.0 to 18.0 GHz
LO Power	+16 dBm typ

Transfer Characteristics


Conversion Loss	6.2 dB typ 8.0 dB max
IF Frequency	DC to 4.0 GHz
LO to RF Isolation	22 dB min 35 dB typ
LO to IF Isolation	20 dB min 30 dB typ
IP3 In	+19 dBm typ
P1dB In	+10 dBm typ


Available Package Styles


Available Package Styles W1,X,Y,Z

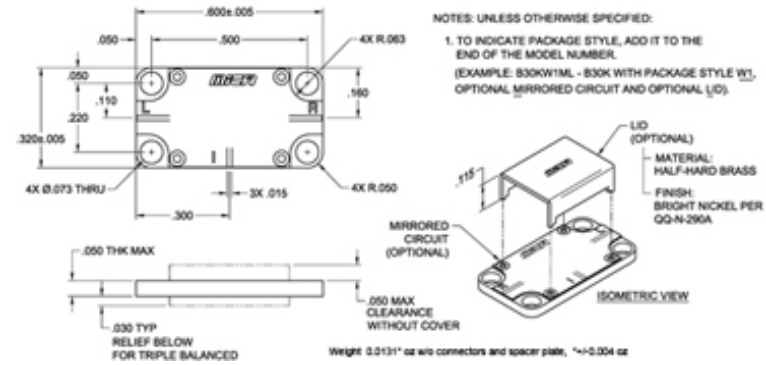

X PACKAGE

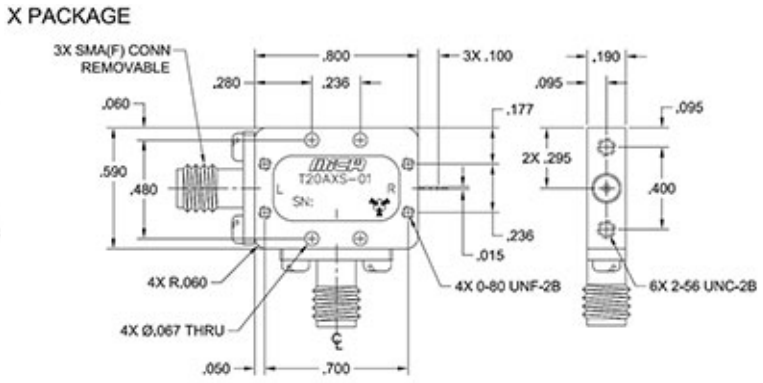

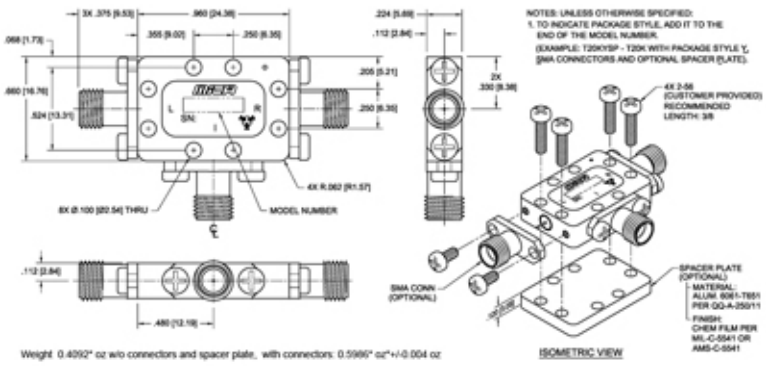

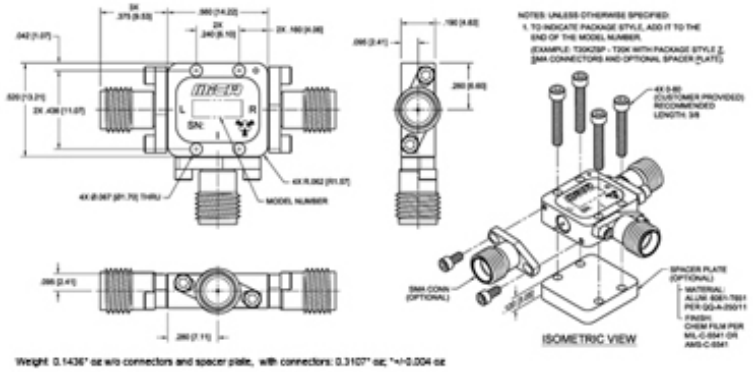

Environmental Ratings

Operating Temp -55 °C to 100 °C

Notes

Specifications subject to change without notice