



1. Mechanical Dimensions:

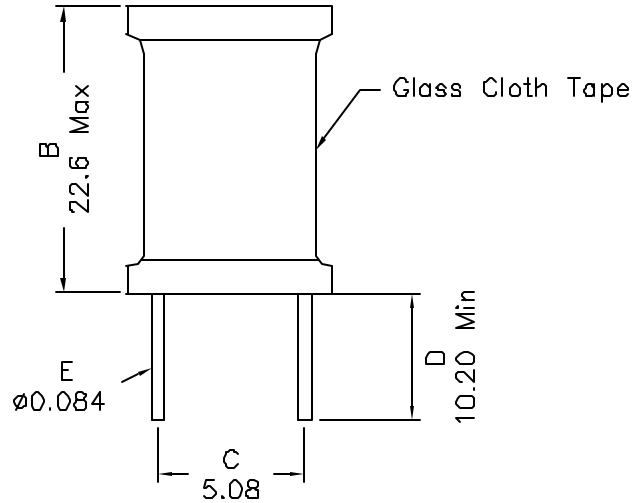


2. Schematic:




3. Electrical Specifications:

OCL: 560uH±10% @796KHz 0.25V
 DCR: 0.834 Ohms Max
 Rated Current: 1.0A_{dc}
 Q: 20 Min

MARKING: (ON TOP)

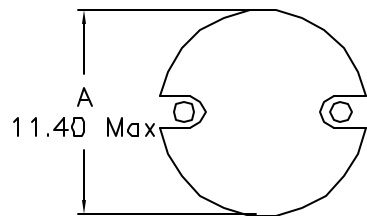

(BOTTOM VIEW)



Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/2

XFMRS Inc www.XFMRS.com		Title: Radial Leaded Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFRLO919-561K	REV. A	
	DWN.	罗振江	May-05-06
SHEET 1 OF 1	CHK.	廖玉坤	May-05-06
	APP.	BW	May-05-06