

8 Watts

JCJ08 Series



- 2:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -40 °C to +100 °C
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation
- High Efficiency - Up to 85%

Specification

Input

Input Voltage Range	• 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple	• 35 mA pk-pk through 12 μH inductor, 5 Hz to 20 MHz
Input Surge	• 12 V models 25 VDC for 100 ms • 24 V models 50 VDC for 100 ms • 48 V models 100 VDC for 100 ms

Output

Output Voltage	• See table
Output Voltage Balance	• $\pm 1\%$ max, dual output models
Minimum Load	• No minimum load required
Initial Set Accuracy	• $\pm 1\%$ max
Start Up Delay	• <20 ms
Start Up Rise Time	• <10 ms
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 0.7\%$ for 3.3 V models, $\pm 0.5\%$ for all other models, see note 2
Cross Regulation	• $\pm 5\%$ on dual output models, see note 3
Transient Response	• <3% max deviation, recovery to within 1% in 250 μs for a 25% load change
Ripple & Noise	• 75 mV pk-pk, 20 MHz BW, with 1 μF ceramic capacitor, see note 4
Overload Protection	• >150%
Short Circuit Protection	• Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	• See tables
Temperature Coefficient	• $\pm 0.02/^{\circ}\text{C}$ max

General

Efficiency	• See tables
Isolation	• 1500 VDC Input to Output • 1000 VDC Input to Case • 1000 VDC Output to Case
Isolation Capacitance	• 1200 pF max
Switching Frequency	• 330 kHz typical
MTBF	• >0.9 Mhrs to MIL-STD-217F

Environmental

Operating Temperature	• -40 °C to +100 °C, derate from 100% load at +60 °C to no load at +100 °C
Case Temperature	• +100 °C max
Storage Temperature	• -40 °C to +125 °C
Humidity	• Up to 90%, non-condensing
Cooling	• Natural convection

EMC

Emissions	• EN55022 Class A conducted with external components - see application note
ESD Immunity	• EN61000-4-2, 4 kV contact discharge Perf Criteria B
Radiated Immunity	• EN61000-4-3, 3 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria B*
Surge	• EN61000-4-5, level 3 Perf Criteria B*
Conducted Immunity	• EN61000-4-6, 3 Vrms Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m Perf Criteria A

* See note 5.

Models and Ratings

JCJ08 XP

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 V	3.3 V	2.000 A	20 mA	0.69 A	3000 μ F	80%	JCJ0812S3V3
	5.0 V	1.500 A	20 mA	0.76 A	2200 μ F	82%	JCJ0812S05
	12.0 V	0.665 A	20 mA	0.78 A	470 μ F	85%	JCJ0812S12
	15.0 V	0.535 A	20 mA	0.80 A	220 μ F	83%	JCJ0812S15
	± 5.0 V	± 0.800 A	20 mA	0.81 A	± 1000 μ F	82%	JCJ0812D05
	± 12.0 V	± 0.335 A	20 mA	0.79 A	± 220 μ F	84%	JCJ0812D12
18-36 V	3.3 V	2.000 A	15 mA	0.34 A	3000 μ F	80%	JCJ0824S3V3
	5.0 V	1.500 A	15 mA	0.38 A	2200 μ F	82%	JCJ0824S05
	12.0 V	0.665 A	15 mA	0.39 A	470 μ F	85%	JCJ0824S12
	15.0 V	0.535 A	15 mA	0.40 A	220 μ F	84%	JCJ0824S15
	± 5.0 V	± 0.800 A	15 mA	0.41 A	± 1000 μ F	82%	JCJ0824D05
	± 12.0 V	± 0.335 A	15 mA	0.40 A	± 220 μ F	83%	JCJ0824D12
36-75 V	3.3 V	2.000 A	15 mA	0.17 A	3000 μ F	80%	JCJ0848S3V3
	5.0 V	1.500 A	15 mA	0.19 A	2200 μ F	82%	JCJ0848S05
	12.0 V	0.665 A	15 mA	0.20 A	470 μ F	84%	JCJ0848S12
	15.0 V	0.535 A	15 mA	0.20 A	220 μ F	84%	JCJ0848S15
	± 5.0 V	± 0.800 A	15 mA	0.20 A	± 1000 μ F	82%	JCJ0848D05
	± 12.0 V	± 0.335 A	15 mA	0.20 A	± 220 μ F	85%	JCJ0848D12
	± 15.0 V	± 0.265 A	15 mA	0.20 A	± 100 μ F	85%	JCJ0848D15


Notes

1. Input current measured at nominal input voltage.
2. From 10% to 100% load.
3. When one output is set at 100% load and the other varied between 25% and 100% load
4. Measured with 20 MHz BW and 1 μ F ceramic capacitor across output rails.
5. External input capacitor required, Nippon Chemi-Con KY series, 220 μ F/100 V or equivalent.

Mechanical Details

All dimensions are in inches (mm) Weight: 0.04 lbs (20 g) approx.


24 Pin DIL Package - Nickel Coated Copper

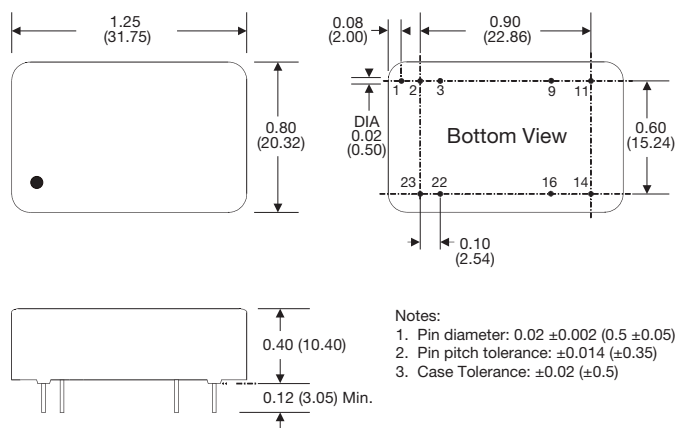


Pin Connections		
Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	Not Connected	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Application Notes

Derating Curve

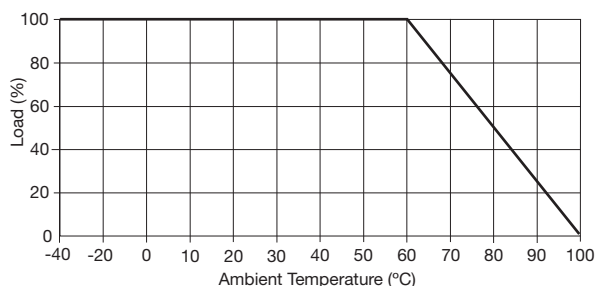

Input Filter

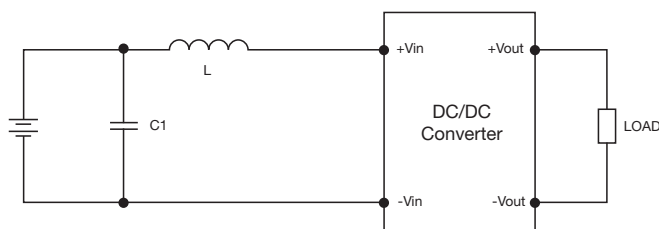

Model	L	C1
12 V	12 μ H	100 μ F, 100 V
24 V	12 μ H	100 μ F, 100 V
48 V	12 μ H	100 μ F, 100 V