
- 9, 15, 25, 37 or 50 way
- Stamped & Formed Contact
- Selective Gold Plated Contacts
- Tin Plated Metal Housing
- Current Ratings - 5Amps
- Low Cost

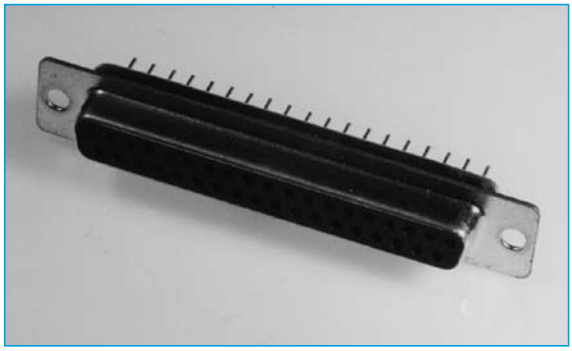

SPECIFICATION


Material:

Insulator:	PBT +30% Glass Fibre UL94V-0
Pin contacts:	Phosphor Bronze Gold Plated
Shell:	Steel, SPCC Nickel and Tin Plated

Electrical Data:

Rated Voltage:	350V AC
Rated Current:	5A
Withstand Voltage:	500V AC(rms)
Insulation Resistance:	Over 1000 MΩ
Contact Resistance:	5 MΩ AT 1A
Temperature:	-40°C to 100°C

OUTLINE DRAWING

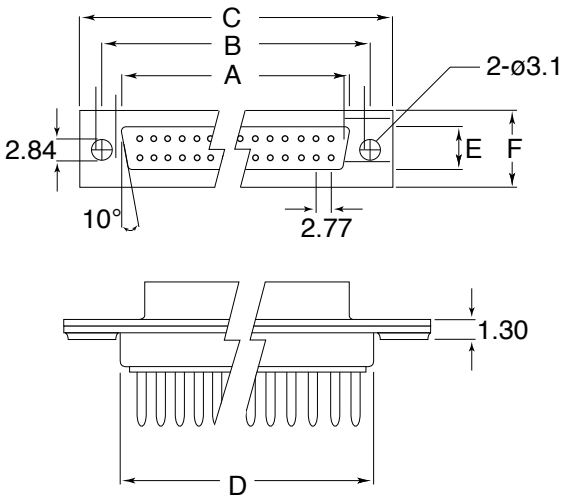


	A	B	C	D	E	F	G
9 WAY	16.90	25.00	30.80	19.30	8.10	12.50	10.70
15 WAY	25.30	33.30	39.10	27.50	8.10	12.50	10.70
25 WAY	39.00	47.00	53.00	41.30	8.10	12.50	10.70
37 WAY	55.10	63.50	69.30	57.70	8.10	12.50	10.70
50 WAY	52.80	61.10	66.90	55.30	11.10	15.40	13.60

Dimension - mm (Male)

	A	B	C	D	E	F	G
9 WAY	16.30	25.00	30.80	19.30	7.90	12.50	10.70
15 WAY	24.70	33.30	39.10	27.50	7.90	12.50	10.70
25 WAY	38.40	47.00	53.00	41.30	7.90	12.50	10.70
37 WAY	54.80	63.50	69.30	57.70	7.90	12.50	10.70
50 WAY	52.40	61.10	66.90	55.30	10.80	15.40	13.60

Dimension - mm (Female)

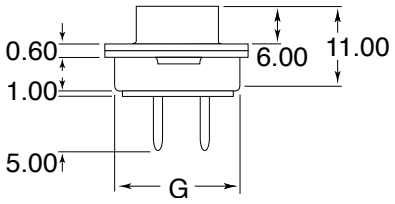

ORDERING INFORMATION

DBC	SD	M	SS	09	S
Dubilier Connectors	Series	Contact Type	Contact Style	Nº of Ways	Contact plating
	SD = Stamped & Formed Pin D	M = Male(plug) F = Female(socket)	SS = Solder Straight	09 = 9 ways 15 = 15 ways 25 = 25 ways 37 = 37 ways 50 = 50 ways	S = Selective Gold Plating