100V N-Channel MOSFETs

General Description


These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.


BVDSS	RDSON	ID
100V	18mΩ	45A

Features

- *100V,45A, RDS(ON) =18mΩ@VGS = 10V*
- *Improved dv/dt capability*
- *Fast switching*
- *100% EAS Guaranteed*
- *Green Device Available*

TO-252 Pin Configuration





Applications

- *Notebook*
- *Load Switch*
- *LED applications*

Absolute Maximum Ratings **Tc=25℃ unless otherwise noted**

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous (T_C=25℃)	45	A
	Drain Current – Continuous (T_C=100℃)	28	A
I_{DM}	Drain Current – Pulsed[1]	180	A
EAS	Single Pulse Avalanche Energy[2]	45	mJ
IAS	Single Pulse Avalanche Current[2]	30	A
P_D	Power Dissipation (T_C=25℃)	102	W
	Power Dissipation – Derate above 25℃	0.82	W/℃
T_{STG}	Storage Temperature Range	-50 to 150	℃
T_J	Operating Junction Temperature Range	-50 to 150	℃

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	℃/W
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	1.22	℃/W

Electrical Characteristics (T_J=25 ℃)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	100	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25℃ , I_D=1mA	---	0.05	---	V/℃
I_{DSS}	Drain-Source Leakage Current	V_{DS}=100V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=80V , V_{GS}=0V , T_J=125℃	---	---	10	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=± 20V , V_{DS}=0V	---	---	± 100	nA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V , I_D=25A	---	15	18	mΩ
		V_{GS}=6V , I_D=15A	---	17	22	mΩ
		V_{GS}=4.5V , I_D=6A	---	25	38	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250uA	1	2	3	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	-5	---	mV/℃
gfs	Forward Transconductance	V_{DS}=10V , I_D=3A	---	10	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge[3,4]	V_{DS}=50V , V_{GS}=10V , I_D=5A	---	36.8	68	nC
Q_{gs}	Gate-Source Charge[3,4]		---	9.3	18	
Q_{gd}	Gate-Drain Charge[3,4]		---	9.8	19	
$T_{d(on)}$	Turn-On Delay Time[3,4]	V_{DD}=50V , V_{GS}=10V , R_G=6Ω I_D=1A	---	20	40	ns
T_r	Rise Time[3,4]		---	15	30	
$T_{d(off)}$	Turn-Off Delay Time[3,4]		---	45	80	
T_f	Fall Time[3,4]		---	21	40	
C_{iss}	Input Capacitance	V_{DS}=50V , V_{GS}=0V , F=1MHz	---	1820	3300	pF
C_{oss}	Output Capacitance		---	170	340	
C_{rss}	Reverse Transfer Capacitance		---	90	180	
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, F=1MHz	---	1.35	2.6	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	V_G=V_D=0V , Force Current	---	---	45	A
I_{SM}	Pulsed Source Current		---	---	90	A
V_{SD}	Diode Forward Voltage	V_{GS}=0V , I_S=1A , T_J=25℃	---	---	1	V
t_{rr}	Reverse Recovery Time[3]	I_S=1A , dI/dt=100A/μs T_J=25℃	---	---	---	ns
Q_{rr}	Reverse Recovery Charge[3]		---	---	---	nC

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. V_{DD}=50V,V_{GS}=10V,L=0.1mH,I_{AS}=30A.,R_G=25Ω, Starting T_J=25℃.
3. The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%.
4. Essentially independent of operating temperature.

ELECTRICAL CHARACTERISTICS CURVES

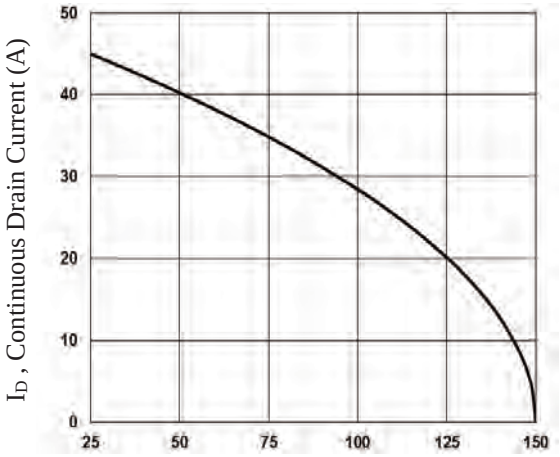


Fig.1 Continuous Drain Current vs. T_C

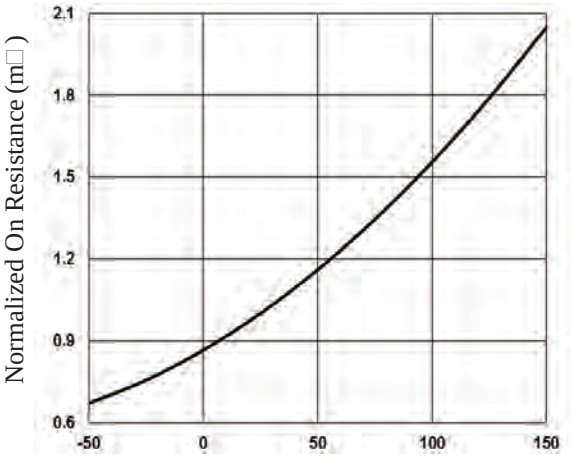


Fig.2 Normalized RDSON vs. T_J

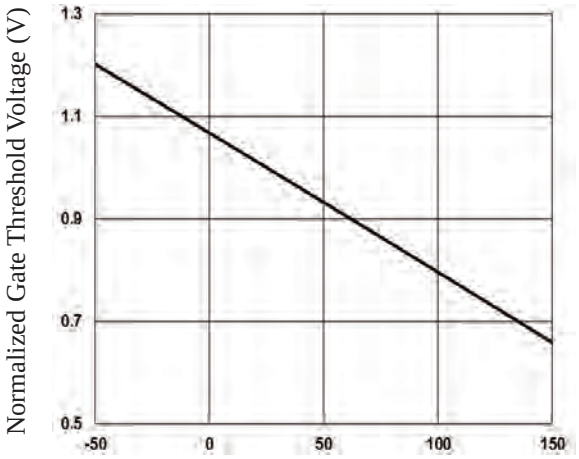


Fig.3 Normalized Vth vs. T_J

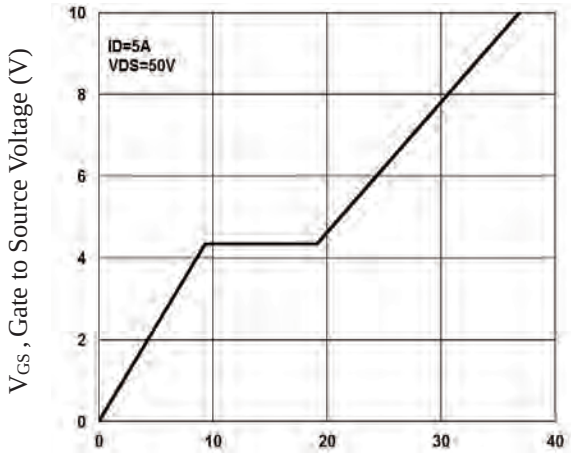


Fig.4 Gate Charge Characteristics

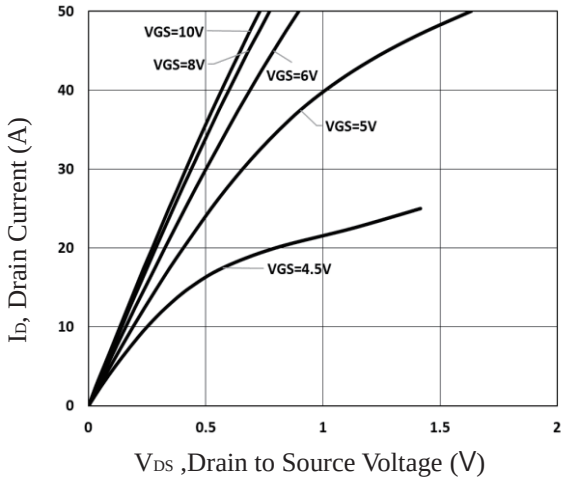


Fig.5 Typical Output Characteristics


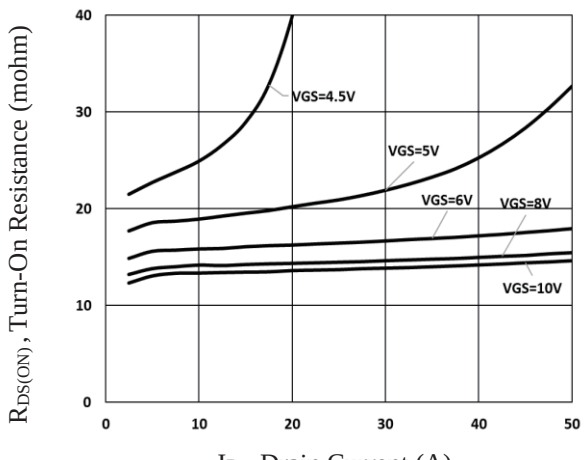



Fig.6 Turn-On Resistance vs. I_D

ELECTRICAL CHARACTERISTICS CURVES（Con.）

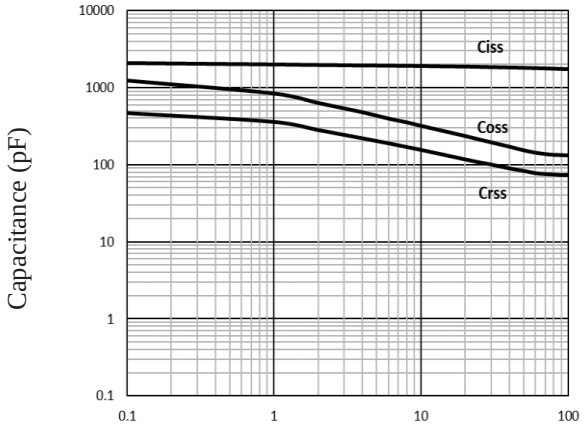


V_{DS} , Drain to Source Voltage (V)

Fig.7 Capacitance Characteristics

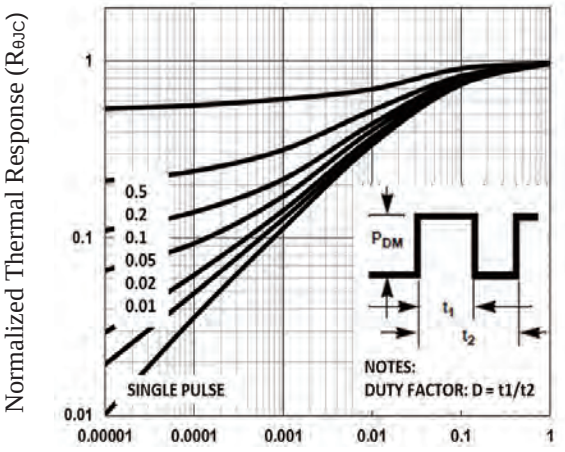

Square Wave Pulse Duration (s)

Fig.8 Normalized Transient Impedance

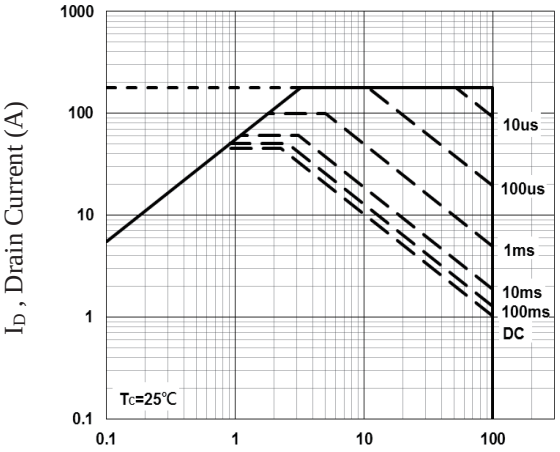

V_{DS} , Drain to Source Voltage (V)

Fig.9 Maximum Safe Operation Area

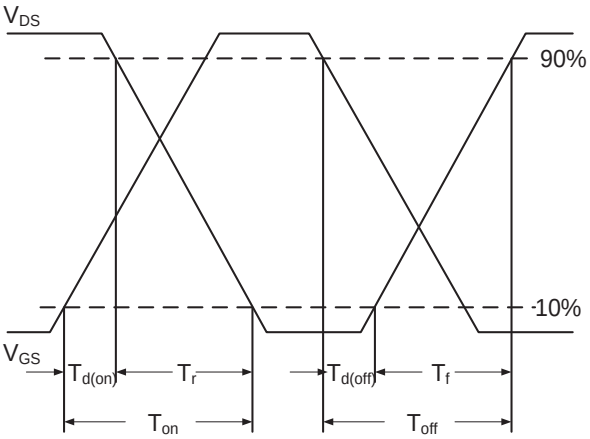


Fig.10 Switching Time Waveform


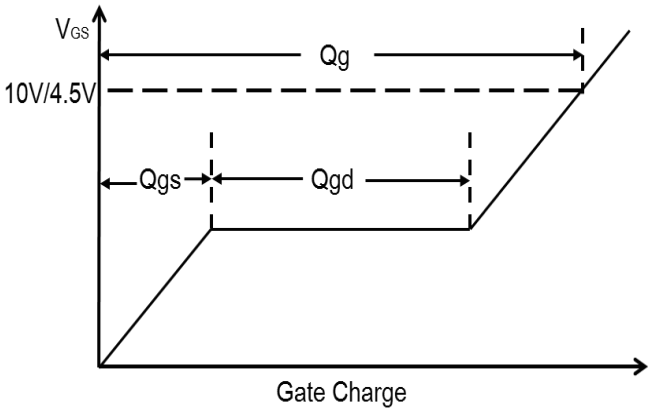


Fig.11 Gate Charge Waveform

TO-252 PACKAGE INFORMATION

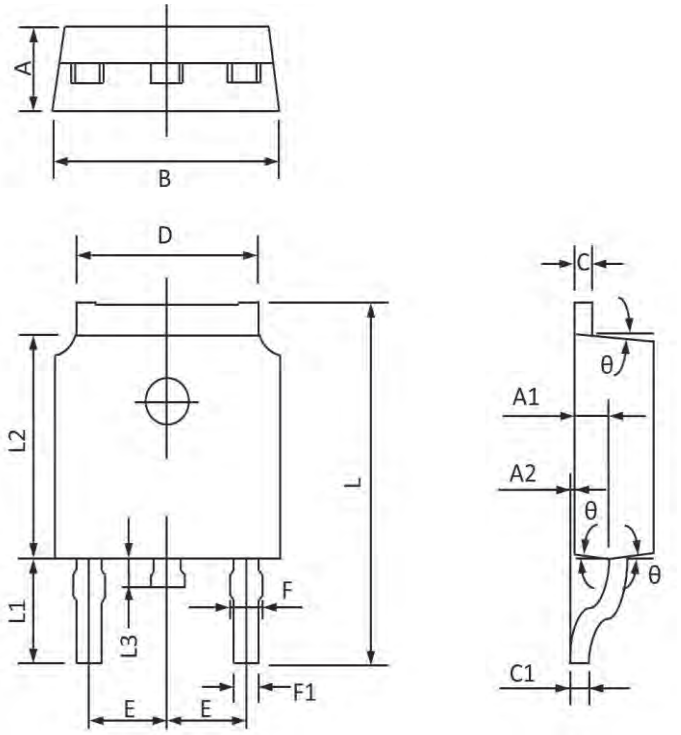

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	2.400	2.200	0.094	0.087
A1	1.110	0.910	0.044	0.036
A2	0.150	0.000	0.006	0.000
B	6.800	6.400	0.268	0.252
C	0.580	0.450	0.023	0.018
C1	0.580	0.460	0.023	0.018
D	5.500	5.100	0.217	0.201
E	2.386	2.186	0.094	0.086
F	1.140	0.600	0.045	0.024
F1	0.880	0.500	0.035	0.020
L	10.400	9.400	0.409	0.370
L1	3.000	2.400	0.118	0.094
L2	6.223	5.400	0.245	0.213
L3	1.200	0.600	0.047	0.024
θ	9°	3°	9°	3°