

# BAZ 04-N-UT



## Performance features

- » For controlling locking mechanisms for fire doors and sliding doors
- » Activation possible through central fire alarm
- » Operation directly on the device or via remote triggering
- » Manual trip occurs via recessed button UT 4U
- » Integrated recessed button
- » With isolated alarm contact
- » Display: Operational standby and triggering
- » Connection of up to 14 fire detectors
- » Max. 4 hr battery backup supply

## Accessories

Recessed button




Fire detector



Magnets



## Example of application

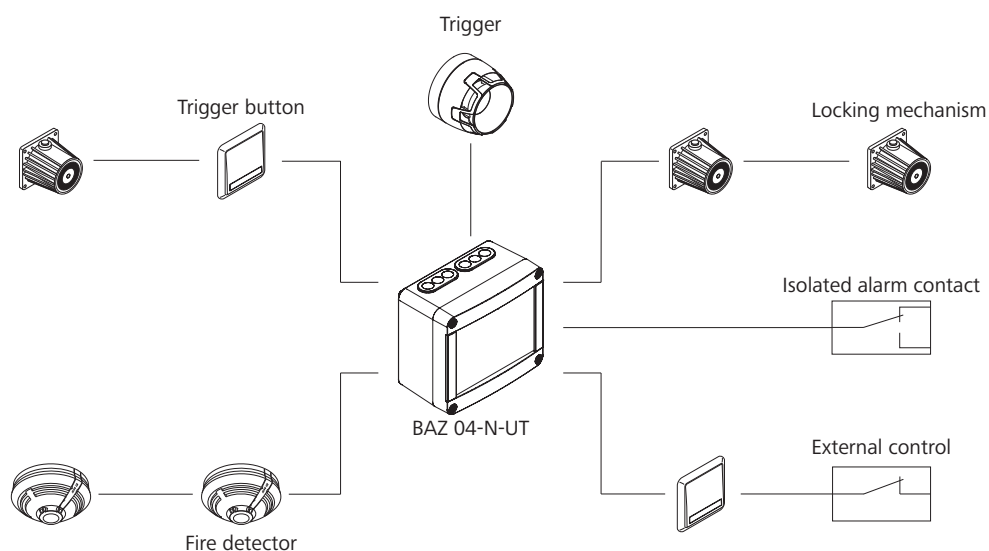

## Technical data

Supply	230 V AC / 50 Hz / 15 VA
Output	24 V DC / 0.4 A
Switching contact	Floating changeover contact
Alarm contact	230 V AC / 3 A
Type of protection	IP 50
Temperature range	-5 °C ... +40 °C
Housing	Polycarbonate

## Approvals / Certificates

Find out about permission details from your D+H Partner



## Design

Type	Art. No.	Colour	W x H x D	W x H	Weight	Remark
BAZ 04-N-UT	31.101.20	Light grey (~ RAL 7035)	172 x 151 x 95 mm		1.00 kg	
UT 4U	31.100.70	Red (~ RAL 3000)		80 x 80 mm	0.15 kg	Recessed button