
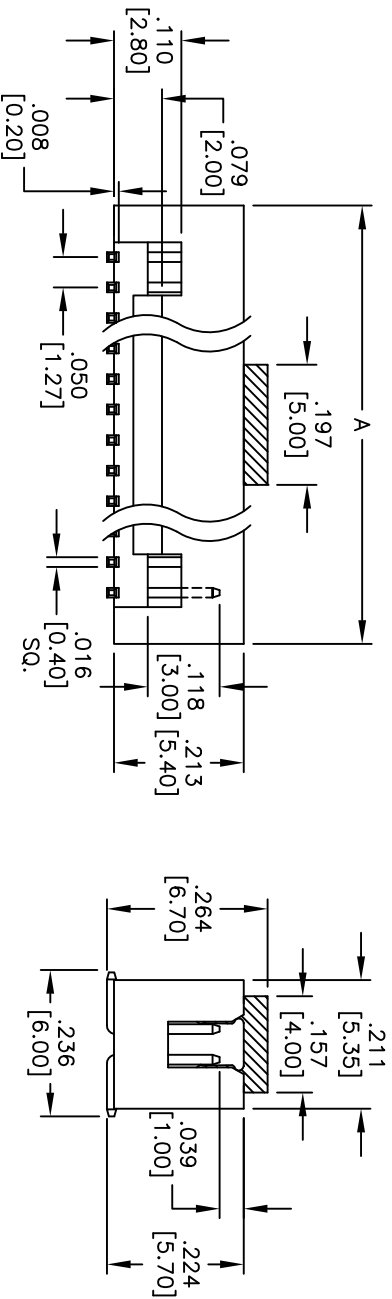


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

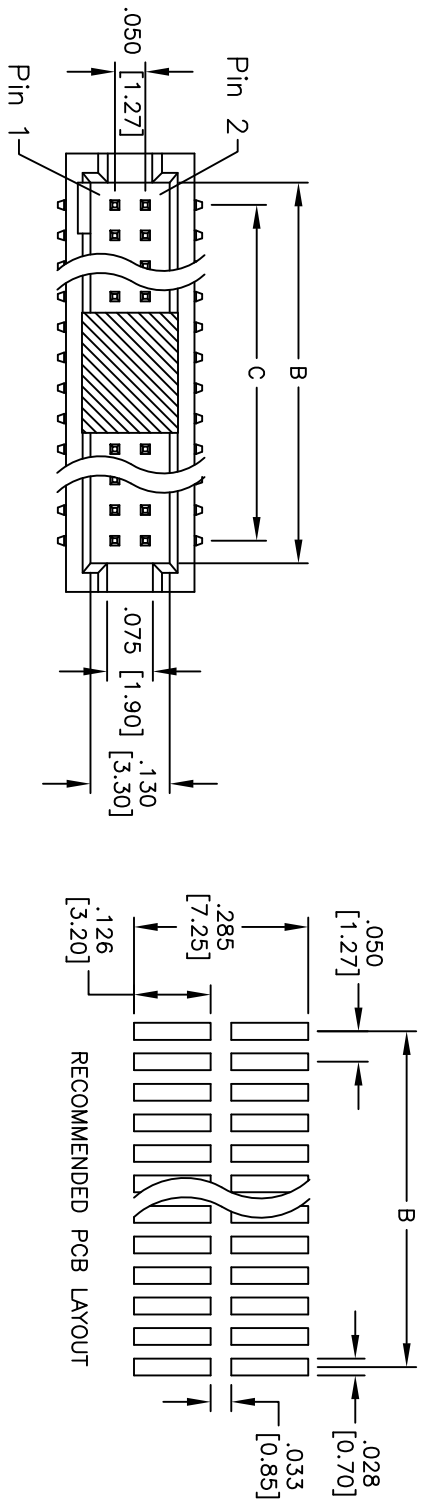

PACKAGED ON TAPE & REEL

**SPECIFICATIONS:**  
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating: 30U" Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.  
 Electrical: Current rating: 1 Amp max.  
 Contact resistance: 10 mohms max. initial  
 Insulation resistance: 5,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, RoHS compliant.  
 Recommended soldering temp: 260° for 5 sec.

Positions: 10 thru 100  
 A = .050 [1.27] x No. of Spaces + .168 [4.27]  
 B = .050 [1.27] x No. of Spaces + .074 [1.87]  
 C = .050 [1.27] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

.050 [1.27] SHROUDED HEADER, VERTICAL  
 SMT TYPE, 30U" SEL GOLD PLATED

**UNLESS OTHERWISE SPECIFIED**  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES  
 .X ± .10 ØXX ± .10  
 .XX ± .020 ØXXX ± .015  
 .XXX ± .015 ØXXXX ± .010  
 APPROVALS: DRAWN: DY DATE: 9/18/09  
 CHECKED: APPROVED: SIZE: X PART NO.: HSH-XX-WSG-SMT-1P-PP-T/R  
 REF: S0009T SCALE: NTS SHEET 1 OF 1

