
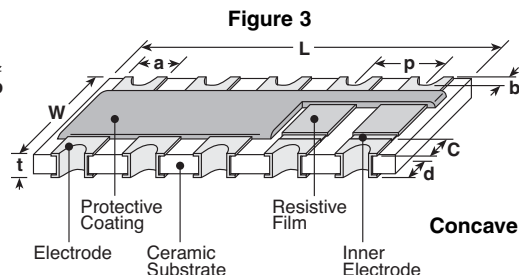
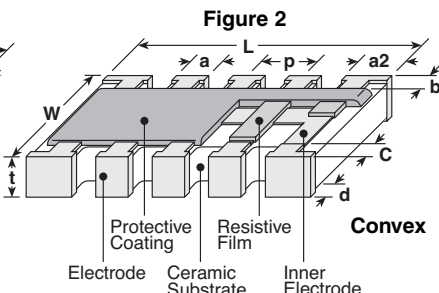


features

- Manufactured to type RK73 standards
- Concave or convex terminations
- Less board space than individual chips
- Eight bussed resistor elements included in one array
- Marking: Marked with resistance value
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

dimensions and construction

Size Code	Figure No.	Dimensions inches (mm)										
		L	W	C	d	e	t	a (top)	a2	a (bot.)	b	p
1J10VK	2	.126±.004 (3.2±0.1)	.063±.004 (1.6±0.1)	.012±.008 (0.3±0.1)	.012±.004 (0.3±0.1)	—	.020±.004 (0.5±0.1)	.016±.004 (0.4±0.1)	—	.012 (0.3)	—	.025 (0.64)
1J10K	2	.126±.006 (3.2±0.15)	.063±.008 (1.6±0.2)	.012±.008 (0.3±0.2)	.010±.004 (0.25±0.1)	—	.020±.004 (0.5±0.1)	.016±.004 (0.4±0.1)	.022±.004 (0.55±0.1)	.012±.008 (0.3±0.2)	—	.025 (0.64)
1J10Y	1			.014±.004 (0.35±0.1)	.014±.004 (0.35±0.1)	.016±.006 (0.4±0.15)	.022±.004 (0.55±0.1)	.013±.006 (0.33±0.15)	—	.012±.004 (0.3±0.1)	.008±.004 (0.2±0.1)	
2A10Y		.157±.008 (4.0±0.2)	.083±.008 (2.1±0.2)	.010±.008 (0.25±0.2)	.016±.008 (0.4±0.2)	.020±.008 (0.5±0.2)	.024±.004 (0.6±0.1)	.020±.008 (0.5±0.2)	—	.016±.006 (0.4±0.15)	.006±.004 (0.15±0.1)	.031 (0.8)
2B10V	3	.252±.008 (6.4±0.2)	.122±.008 (3.1±0.2)	.014±.006 (0.35±0.15)	.022±.006 (0.55±0.15)	—	.024±.004 (0.6±0.1)	.024±.004 (0.6±0.1)	—	.024±.006 (0.6±0.15)	.006±.004 (0.15±0.1)	0.05 (1.27)
2B10												

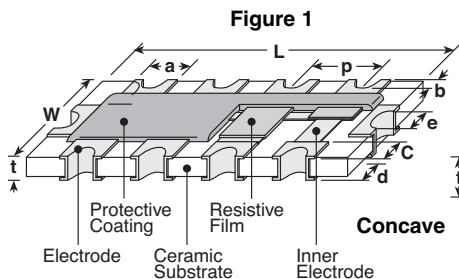

ordering information

New Part #	CND	1J	10	V	K	T	TD	103	J
Type		Size	Elements	Circuit Symbol	Terminal Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
		1J	10	V: Reverse common electrode Nil: Standard		T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape	2 significant figures + 1 multiplier	J: ±5%


New Part #	CND	2B	10	V	T	TE	103	J
Type		Size	Elements	Circuit Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
		1J 2A 2B	10	V: Reverse common electrode Y: Side common electrode Nil: Standard	T: Sn (Other termination styles may be available, please contact factory for options)	TD: 7" paper tape TE: 7" embossed plastic	2 significant figures + 1 multiplier	J: ±5%

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/17/12

circuit schematics and markings

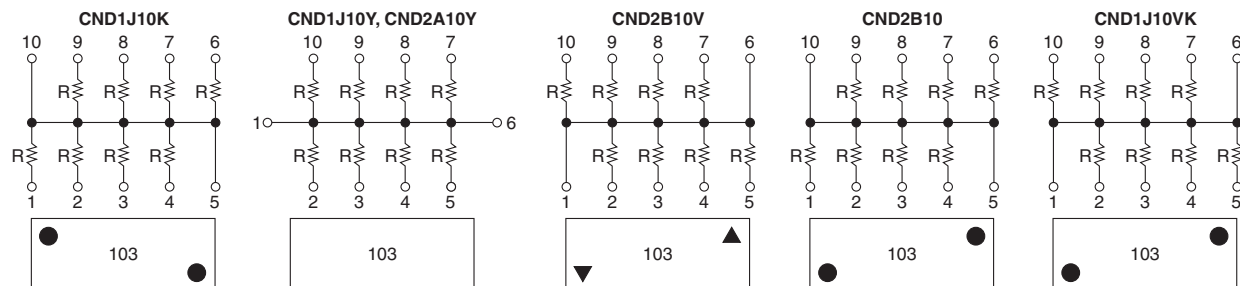


applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	T.C.R. (ppm/°C) Max.	Resistance Range E-12	Resistance Tolerance	Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)	Operating Temperature Range	
CND1J10VK	.031	±200	47Ω - 39kΩ	J: ±5%	25V	50V	-55°C to +125°C	
CND1J10K								
CND1J10Y	.05		22Ω - 39KΩ					
CND2A10Y	.063		100Ω - 100KΩ			50V		100V
CND2B10V								
CND2B10								


environmental applications

Derating Curve

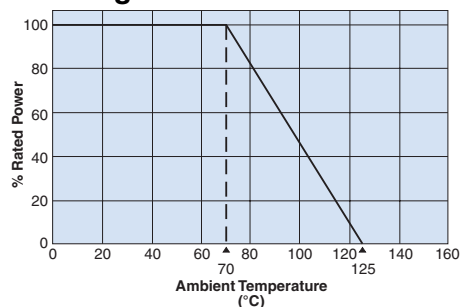

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Circuit Board Application

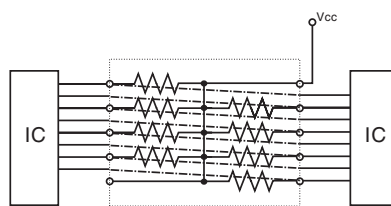

Performance Characteristics

Parameter	Requirement $\Delta R \pm 1\%$	Limit	Typical	Test Method
Resistance	Within specified tolerance	—	—	25°C
T.C.R.	Within specified T.C.R.	—	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.5%	—	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.25%	—	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.25%	—	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	—	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±1.0%	—	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.2%	—	+125°C, 1000 hours

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[CND2B10LTE121J](#) [CND2B10LTE560J](#) [CND2B10LTE561J](#) [CND2B10LTE562J](#) [CND2B10VLTE333J](#)
[CND2B10VLTE472J](#) [CND2B10LTE203J](#) [CND2B10VLTE272J](#) [CND2B10LTE683J](#) [CND2B10LTE101J](#)
[CND2B10LTE104J](#) [CND2B10LTE103JR10](#) [CND2B10LTE102J](#) [CND2B10LTE511J](#) [CND1J10YTDD332J](#)
[CND1J10YTDD151J](#) [CND2B10TTE104J](#) [CND2B10TTE122J](#) [CND2B10VTTE152J](#) [CND2B10VTTE271J](#)
[CND1J10YTDD390J](#) [CND1J10YTDD560J](#) [CND1J10YTDD750J](#) [CND2B10VLTE471J](#) [CND2B10LTE332J](#)
[CND2B10VLTE104J](#) [CND2B10VLTE102J](#) [CND2B10LTE333J](#) [CND2B10LTE331J](#) [CND2B10VLTE103J](#)
[CND2B10LTE510J](#) [CND2B10VLTE332J](#) [CND2B10LTE181J](#) [CND2B10LTE223J](#) [CND2B10LTE221J](#)
[CND2B10LTE222J](#) [CND2B10LTE681J](#) [CND2B10LTE471J](#) [CND2B10LTE473J](#) [CND2B10LTE472J](#)
[CND2A10VYLTE332J](#) [CND2B10LTE182J](#) [CND2A10VYLTE333J](#) [CND2B10LTE622J](#) [CND2B10TTE101J](#)
[CND2B10TTE102J](#) [CND2B10TTE103J](#) [CND2B10TTE121J](#) [CND2B10TTE182J](#) [CND2B10TTE203J](#)
[CND2B10TTE221J](#) [CND2B10TTE222J](#) [CND2B10TTE223J](#) [CND2B10TTE271J](#) [CND2B10TTE332J](#)
[CND2B10TTE333J](#) [CND2B10TTE471J](#) [CND2B10TTE472J](#) [CND2B10TTE473J](#) [CND2B10TTE561J](#)
[CND2B10TTE562J](#) [CND2B10TTE681J](#) [CND2B10TTE683J](#) [CND2B10VLTE222J](#) [CND2B10VTTE102J](#)
[CND2B10VTTE103J](#) [CND2B10VTTE104J](#) [CND2B10VTTE222J](#) [CND2B10VTTE272J](#) [CND2B10VTTE332J](#)
[CND2B10VTTE333J](#) [CND2B10VTTE472J](#) [CND1J10YLTDD510J](#)