MC74AC652, MC74ACT652

Octal Transceiver/Register with 3-State Outputs (Non-Inverting)

The MC74AC/ACT652 consists of registered bus transceiver circuits, with outputs, D−type flip−flops and control circuitry providing multiplexed transmission of data directly from the input bus or from the internal storage registers. Data on the A or B bus will be loaded into the respective registers on the LOW−to−HIGH transition of the appropriate clock pin (CAB or CBA). The four fundamental data handling functions available are illustrated in Figures 1 to 4.

- Independent Registers for A and B Buses
- Multiplexed Real−Time and Stored Data Transfers
- Choice of True and Inverting Data Paths
- 3−State Outputs
- 300 mil Slim Dual−in−Line Package
- Outputs Source/Sink 24 mA
- ′ACT652 Has TTL Compatible Inputs
- **These devices are available in Pb−free package(s). Specifications herein apply to both standard and Pb−free devices. Please see our website at www.onsemi.com for specific Pb−free orderable part numbers, or contact your local ON Semiconductor sales office or representative.**




Figure 1.




Figure 2.




Figure 3.






Figure 4.

ON Semiconductor™

http://onsemi.com




PDIP−24
N SUFFIX
CASE 724




SO−24
DW SUFFIX
CASE 751E

MARKING DIAGRAMS

PDIP−24



SO−24




A = Assembly Location
L, WL = Wafer Lot
Y, YY = Year
W, WW = Work Week

ORDERING INFORMATION

Device	Package	Shipping
MC74AC652N	PDIP−24	15 Units/Rail
MC74ACT652N	PDIP−24	15 Units/Rail
MC74AC652DW	SOIC−24	30 Units/Rail
MC74AC652DWR2	SOIC−24	1000 Tape & Reel
MC74ACT652DW	SOIC−24	30 Units/Rail
MC74ACT652DWR2	SOIC−24	1000 Tape & Reel

© Semiconductor Components Industries, LLC, 2006

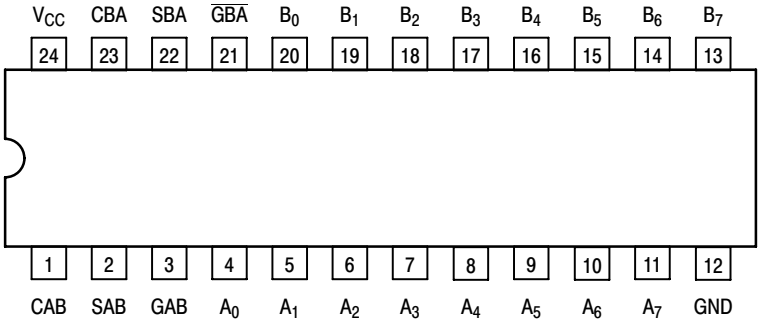

PIN ASSIGNMENT

PIN	FUNCTION
A_0–A_7	Data Register A Inputs Data Register A Outputs
B_0–B_7	Data Register B Inputs Data Register B Outputs
CAB, CBA	Clock Pulse Inputs
SAB, SBA	Transmit/Receive Inputs
GAB, $\overline{GBA}$	Output Enable Inputs

Figure 5. Pinout: 24−Lead Plastic Package
(Top View)


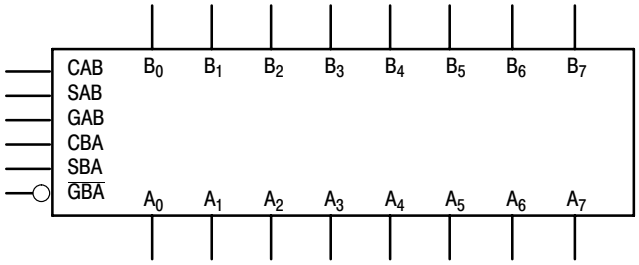


Figure 6. Logic Symbol

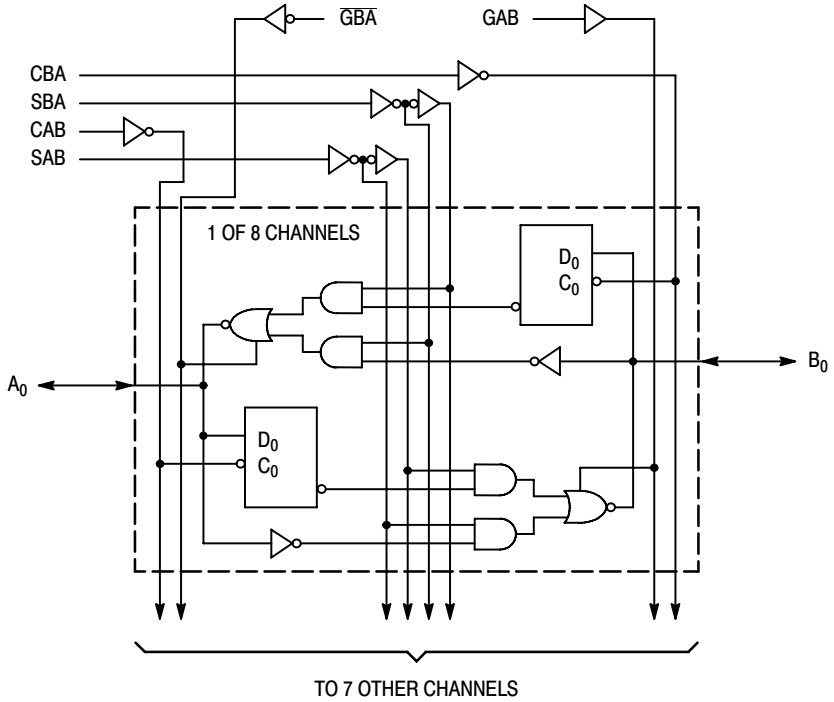

NOTE: This diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Figure 7. Logic Diagram

FUNCTION TABLE

Inputs						Data I/O*		Operation or Function
GAB	$\overline{GBA}$	CAB	CBA	SAB	SBA	$A_0 - A_7$	$B_0 - B_7$	
L L	H H	H or L ⇑	H or L ⇑	X X	X X	Input	Input	Isolation Store A and B Data
X H	H H	⇑ ⇑	H or L ⇑	X X**	X X	Input Input	Unspecified* Output	Store A, Hold B Store A in Both Registers
L L	X L	H or L ⇑	⇑ ⇑	X X	X X**	Unspecified* Output	Input Input	Hold A, Store B Store B in Both Registers
L L	L L	X X	X H or L	X X	L H	Output	Input	Real-Time B Data to A Bus Stored B Data to A Bus
H H	H H	X H or L	X X	L H	X X	Input	Output	Real-Time A Data to B Bus Stored A Data to B Bus
H	L	H or L	H or L	H	H	Output	Output	Stored A Data to B Bus and Stored B Data to A Bus

*The data output functions may be enabled or disabled by various signals at the $\overline{GBA}$ and GAB inputs. Data input functions are always enabled; i.e., data at the bus pins will be stored on every LOW-to-HIGH transition of the appropriate clock inputs.
**Select control = L: clocks can occur simultaneously.
H = HIGH Voltage Level; L = LOW Voltage Level; X = Immaterial; ⇑ = LOW-to-HIGH Transition

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V_{CC}	DC Supply Voltage (Referenced to GND)	−0.5 to +7.0	V
V_{in}	DC Input Voltage (Referenced to GND)	−0.5 to V_{CC} + 0.5	V
V_{out}	DC Output Voltage (Referenced to GND)	−0.5 to V_{CC} + 0.5	V
I_{in}	DC Input Current, per Pin	±20	mA
I_{out}	DC Output Sink/Source Current, per Pin	±50	mA
I_{CC}	DC V_{CC} or GND Current per Output Pin	±50	mA
T_{stg}	Storage Temperature	−65 to +150	°C

*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Typ	Min	Unit
V_{CC}	Supply Voltage	′AC	2.0	5.0	6.0	V
		′ACT	4.5	5.0	5.5	
V_{in}, V_{out}	DC Input Voltage, Output Voltage (Ref. to GND)		0	–	V_{CC}	V
t_r, t_f	Input Rise and Fall Time (Note 1) ′AC Devices except Schmitt Inputs	V_{CC} @ 3.0 V	–	150	–	ns/V
		V_{CC} @ 4.5 V	–	40	–	
		V_{CC} @ 5.5 V	–	25	–	
t_r, t_f	Input Rise and Fall Time (Note 2) ′ACT Devices except Schmitt Inputs	V_{CC} @ 4.5 V	–	10	–	ns/V
		V_{CC} @ 5.5 V	–	8.0	–	
T_J	Junction Temperature (PDIP)		–	–	140	°C
T_A	Operating Ambient Temperature Range		−40	25	85	°C
I_{OH}	Output Current — HIGH		–	–	−24	mA
I_{OL}	Output Current — LOW		–	–	24	mA

1. V_{in} from 30% to 70% V_{CC}; see individual Data Sheets for devices that differ from the typical input rise and fall times.
2. V_{in} from 0.8 V to 2.0 V; see individual Data Sheets for devices that differ from the typical input rise and fall times.

DC CHARACTERISTICS

Symbol	Parameter	V_{CC} (V)	74AC T_A = +25°C	74AC T_A = –40°C to +85°C		Unit	Conditions
			Typ	Guaranteed Limits			
V_{IH}	Minimum High Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	2.1 3.15 3.85	2.1 3.15 3.85	V	V_{OUT} = 0.1 V or V_{CC} – 0.1 V
V_{IL}	Maximum Low Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	0.9 1.35 1.65	0.9 1.35 1.65	V	V_{OUT} = 0.1 V or V_{CC} – 0.1 V
V_{OH}	Minimum High Level Output Voltage	3.0 4.5 5.5	2.99 4.49 5.49	2.9 4.4 5.4	2.9 4.4 5.4	V	I_{OUT} = – 50 μA
		3.0 4.5 5.5	– – –	2.56 3.86 4.86	2.46 3.76 4.76	V	*V_{IN} = V_{IL} or V_{IH} – 12 mA I_{OH} – 24 mA – 24 mA
V_{OL}	Minimum Low Level Output Voltage	3.0 4.5 5.5	0.002 0.001 0.001	0.1 0.1 0.1	0.1 0.1 0.1	V	I_{OUT} = 50 μA
		3.0 4.5 5.5	– – –	0.36 0.36 0.36	0.44 0.44 0.44	V	*V_{IN} = V_{IL} or V_{IH} 12 mA I_{OL} 24 mA 24 mA
I_{IN}	Maximum Input Leakage Current	5.5	–	±0.1	±1.0	μA	V_I = V_{CC}, GND
I_{OZT}	Maximum 3-State Current	5.5	–	±0.6	±6.0	μA	V_I (OE) = V_{IL}, V_{IH} V_I = V_{CC}, GND V_O= V_{CC}, GND
I_{OLD}	†Minimum Dynamic Output Current	5.5	–	–	75	mA	V_{OLD} = 1.65 V Max
I_{OHD}		5.5	–	–	–75	mA	V_{OHD} = 3.85 V Min
I_{CC}	Maximum Quiescent Supply Current	5.5	–	8.0	80	μA	V_{IN} = V_{CC} or GND

*All outputs loaded; thresholds on input associated with output under test.
†Maximum test duration 2.0 ms, one input loaded at a time.

NOTE: I_{IN} and I_{CC} @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V.

AC CHARACTERISTICS

Symbol	Parameter	V_{CC}* (V)	74AC T_A = +25°C C_L = 50 pF		74AC T_A = −40°C to +85°C C_L = 50 pF		Unit
			Min	Max	Min	Max	
t_{PLH}	Propagation Delay CPBA or CPAB to A_n or B_n	3.0 5.0	4.0 2.5	17.0 12.0	3.0 2.0	19.0 14.0	ns
t_{PHL}	Propagation Delay CPBA or CPAB to A_n or B_n	3.0 5.0	3.0 2.0	14.5 10.5	2.5 1.5	16.5 12.0	ns
t_{PLH}	Propagation Delay A or B to B_n or A_n	3.0 5.0	3.0 2.0	14.0 9.5	2.5 1.5	16.0 11.0	ns
t_{PHL}	Propagation Delay A or B to B_n or A_n	3.0 5.0	2.5 1.5	13.0 9.0	2.0 1.0	15.0 10.5	ns
t_{PLH}	Propagation Delay SBA or SAB to A_n or B_n	3.0 5.0	3.0 2.5	14.0 10.0	2.5 2.0	16.0 11.5	ns
t_{PHL}	Propagation Delay SBA or SAB to A_n or B_n	3.0 5.0	2.5 2.0	13.5 10.0	2.0 1.5	15.5 11.5	ns
t_{PZH}	Output Enable Time $\overline{OEBA}$ to A_n	3.0 5.0	2.5 1.5	12.0 9.0	2.0 1.0	13.5 10.0	ns
t_{PZL}	Output Enable Time $\overline{OEBA}$ to A_n	3.0 5.0	2.5 1.5	12.0 9.0	2.0 1.0	14.0 10.5	ns
t_{PHZ}	Output Disable Time $\overline{OEBA}$ to A_n	3.0 5.0	3.0 2.0	13.0 11.0	2.5 1.5	14.0 12.0	ns
t_{PLZ}	Output Disable Time $\overline{OEBA}$ to A_n	3.0 5.0	2.5 2.0	12.5 10.5	2.0 1.5	14.0 12.0	ns

*Voltage Range 3.3 V is 3.3 V ±0.3 V.
Voltage Range 5.0 V is 5.0 V ±0.5 V.

DC CHARACTERISTICS

Symbol	Parameter	V_{CC} (V)	74ACT		74ACT	Unit	Conditions
			T_A = +25°C		T_A = –40°C to +85°C		
			Typ	Guaranteed Limits			
V_{IH}	Minimum High Level Input Voltage	4.5 5.5	1.5 1.5	2.0 2.0	2.0 2.0	V	V_{OUT} = 0.1 V or V_{CC} – 0.1 V
V_{IL}	Maximum Low Level Input Voltage	4.5 5.5	1.5 1.5	0.8 0.8	0.8 0.8	V	V_{OUT} = 0.1 V or V_{CC} – 0.1 V
V_{OH}	Minimum High Level Output Voltage	4.5 5.5	4.49 5.49	4.4 5.4	4.4 5.4	V	I_{OUT} = – 50 μA
		4.5 5.5	– –	3.86 4.86	3.76 4.76	V	*V_{IN} = V_{IL} or V_{IH} – 24 mA I_{OH} – 24 mA
V_{OL}	Minimum Low Level Output Voltage	4.5 5.5	0.001 0.001	0.1 0.1	0.1 0.1	V	I_{OUT} = – 50 μA
		4.5 5.5	– –	0.36 0.36	0.44 0.44	V	*V_{IN} = V_{IL} or V_{IH} – 24 mA I_{OH} – 24 mA
I_{IN}	Maximum Input Leakage Current	5.5	–	±0.1	±1.0	μA	V_I = V_{CC}, GND
ΔI_{CCT}	Additional Max. I_{CC}/Input	5.5	0.6	–	1.5	mA	V_I = V_{CC} – 2.1 V
I_{OZT}	Maximum 3-State Current	5.5	–	±0.6	±6.0	μA	V_I (OE) = V_{IL}, V_{IH} V_I = V_{CC}, GND V_O = V_{CC}, GND
I_{OLD}	†Minimum Dynamic Output Current	5.5	–	–	75	mA	V_{OLD} = 1.65 V Max
I_{OHD}		5.5	–	–	–75	mA	V_{OHD} = 3.85 V Min
I_{CC}	Maximum Quiescent Supply Current	5.5	–	8.0	80	μA	V_{IN} = V_{CC} or GND

*All outputs loaded; thresholds on input associated with output under test.
†Maximum test duration 2.0 ms, one input loaded at a time.

AC CHARACTERISTICS

Symbol	Parameter	V_{CC}* (V)	74ACT T_A = +25°C C_L = 50 pF		74ACT T_A = −40°C to +85°C C_L = 50 pF		Unit
			Min	Max	Min	Max	
t_{PLH}	Propagation Delay CPBA or CPAB to A_n or B_n	5.0	4.0	14.5	3.5	16.5	ns
t_{PHL}	Propagation Delay CPBA or CPAB to A_n or B_n	5.0	3.5	14.5	3.0	16.5	ns
t_{PLH}	Propagation Delay A or B to B_n or A_n	5.0	2.5	11.5	2.0	13.0	ns
t_{PHL}	Propagation Delay A or B to B_n or A_n	5.0	2.5	11.5	2.0	13.0	ns
t_{PLH}	Propagation Delay SBA or SAB to A_n or B_n	5.0	2.5	12.0	2.0	13.5	ns
t_{PHL}	Propagation Delay SBA or SAB to A_n or B_n	5.0	3.0	12.0	2.5	13.5	ns
t_{PZH}	Output Enable Time $\overline{OEBA}$ to A_n	5.0	2.0	11.5	1.5	13.0	ns
t_{PZL}	Output Enable Time $\overline{OEBA}$ to A_n	5.0	2.5	11.5	2.0	13.0	ns
t_{PHZ}	Output Disable Time $\overline{OEBA}$ to A_n	5.0	3.0	13.0	2.5	14.0	ns
t_{PLZ}	Output Disable Time $\overline{OEBA}$ to A_n	5.0	2.5	12.5	2.0	14.0	ns
t_{PZH}	Output Enable time OEAB to B_n	5.0	2.5	12.0	2.0	13.5	ns
t_{PZL}	Output Enable Time OEAB to B_n	5.0	2.5	12.0	2.0	13.5	ns
t_{PHZ}	Output Enable Time OEAB to B_n	5.0	3.5	13.5	3.0	14.5	ns
t_{PLZ}	Output Enable Time OEAB to B_n	5.0	3.0	13.5	2.5	15.0	ns
t_s	Setup Time, HIGH or LOW A_n or B_n to CPBA or CPAB	5.0	7.0	–	8.0	–	ns
t_h	Hold Time, HIGH or LOW A_n or B_n to CPBA or CPAB	5.0	2.5	–	2.5	–	ns
t_w	CPAB, CPBA Pulse Width HIGH or LOW	5.0	6.0	–	7.0	–	ns


*Voltage Range 3.3 V is 3.3 V ±0.3 V.
Voltage Range 5.0 V is 5.0 V ±0.5 V.

CAPACITANCE

Symbol	Parameter	74ACT Typ	Unit	Test Conditions
C_{IN}	Input Capacitance	4.5	pF	V_{CC} = 5.0 V
$C_{I/O}$	Input/Output Capacitance	15	pF	V_{CC} = 5.0 V
C_{PD}	Power Dissipation Capacitance	60.0	pF	V_{CC} = 5.0 V

PACKAGE DIMENSIONS


PDIP−24
N SUFFIX
24 PIN PLASTIC DIP PACKAGE
CASE 724−03
ISSUE D

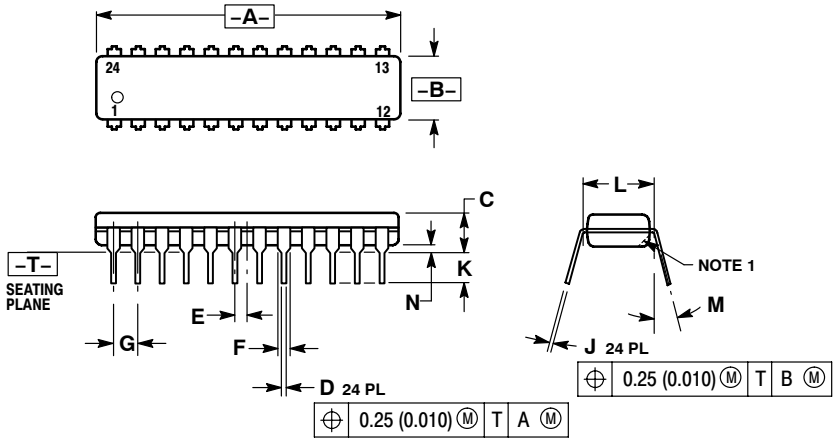

NOTES:
1. CHAMFERED CONTOUR OPTIONAL.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.230	1.265	31.25	32.13
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.020	0.38	0.51
E	0.050 BSC		1.27 BSC	
F	0.040	0.060	1.02	1.52
G	0.100 BSC		2.54 BSC	
J	0.007	0.012	0.18	0.30
K	0.110	0.140	2.80	3.55
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

SO−24
DW SUFFIX
24 PIN PLASTIC SOIC PACKAGE
CASE 751E−04
ISSUE E

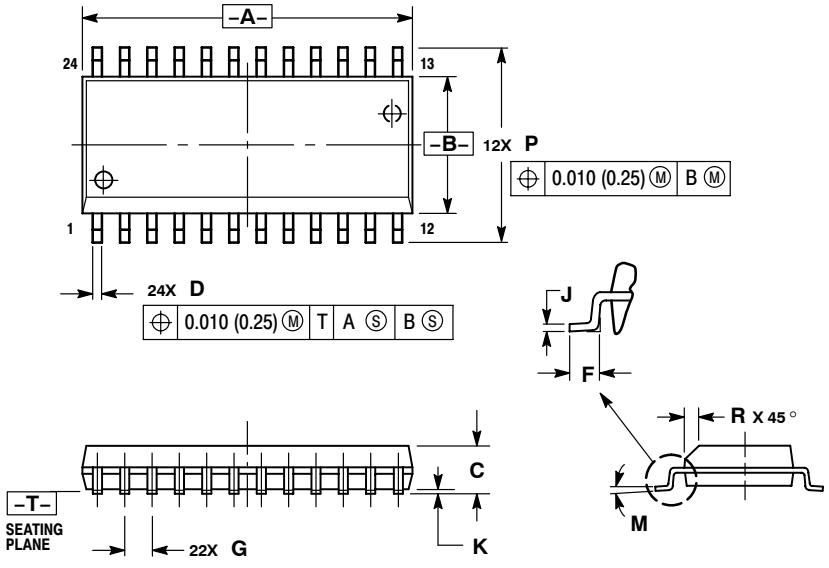

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	15.25	15.54	0.601	0.612
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

Notes

Notes

Notes

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082−1312 USA
Phone: 480−829−7710 or 800−344−3860 Toll Free USA/Canada
Fax: 480−829−7709 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2−9−1 Kamimeguro, Meguro−ku, Tokyo, Japan 153−0051
Phone: 81−3−5773−3850

ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

MC74AC652/D