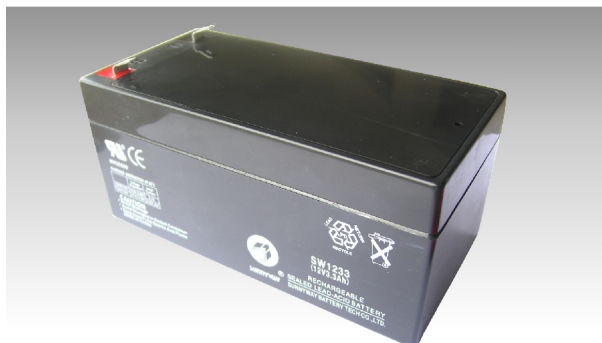
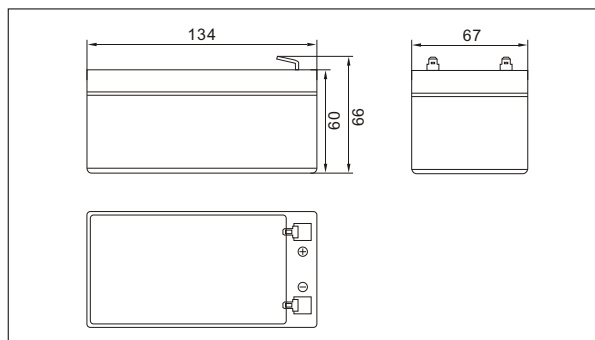
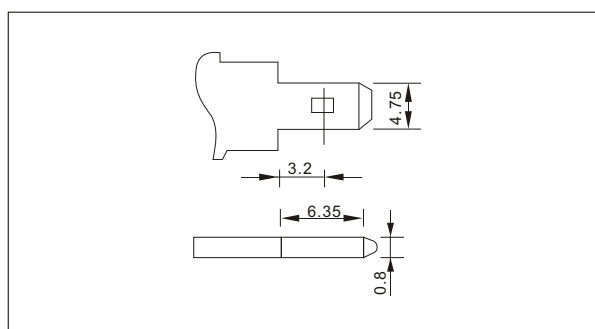
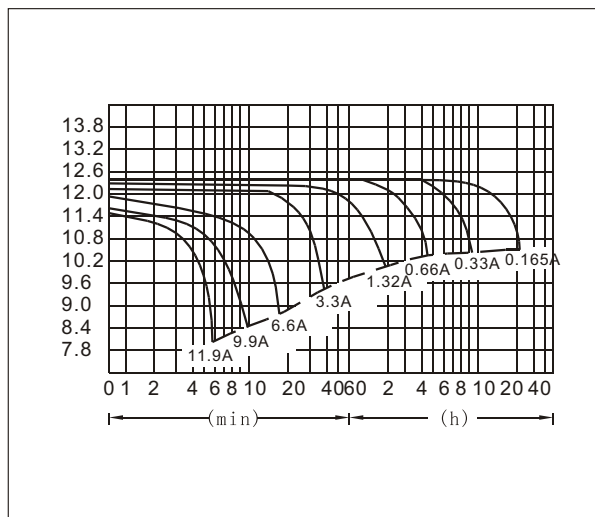


**SW1233(12V 3.3 AH)****Specifications**

Nominal Voltage		12V
Rated capacity (20 hour rate)		3.3 Ah
Dimensions	Total Height	66 mm (2.60 inches)
	Height	60 mm (2.36 inches)
	Length	134 mm (5.28 inches)
	Width	67 mm (2.64 inches)
Weight Approx		1.24 Kg (2.73 lbs)

Characteristics

Capacity 25°C(77°F)	20 hour rate(0.17 A)	3.30 AH
	10 hour rate(0.30 A)	3.04AH
	5 hour rate(0.56A)	2.81AH
	1 hour rate(1.98A)	1.98AH
	1.5 hour discharge to 10.5V	1.32 A
Internal Resistance Full charged Battery at 25°C(77°F)		37 mΩ
Capacity affected by Temperature (20hour rate)	40°C(104°F)	102%
	25°C(77°F)	100%
	0°C(32°F)	85%
	-15°C(5°F)	65%
Self-Discharge at 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal		T1
Charge (constant Voltage)	Cycle	Initial Charging Current less than 1.32 A Voltage 14.40-14.70V
	Float	Voltage 13.50-13.80V

Outer dimensions (mm)**Terminal Type (mm)****Discharge Curves 25°C(77°F)****Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)**

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	11.9	7.79	5.78	3.80	1.98	1.16	0.85	0.68	0.58	0.38	0.31	0.17
	W	123	84	62	41	21.45	12.68	9.46	7.67	6.59	4.39	3.60	1.98
10.20V	A	10.9	7.45	5.31	3.60	1.86	1.11	0.83	0.66	0.57	0.38	0.31	0.17
	W	117	83	59	40	21.04	12.77	9.56	7.67	6.61	4.39	3.60	1.95
10.50V	A	9.9	6.96	4.95	3.49	1.80	1.09	0.81	0.63	0.57	0.37	0.30	0.17
	W	109	79	57	40	20.76	12.60	9.45	7.34	6.57	4.37	3.59	1.95
10.80V	A	9.5	6.66	4.62	3.40	1.74	1.06	0.80	0.62	0.54	0.36	0.30	0.16
	W	107	77	53	39	20.21	12.40	9.41	7.27	6.34	4.29	3.52	1.91
11.10V	A	8.8	6.27	4.29	3.30	1.68	1.03	0.76	0.60	0.51	0.35	0.29	0.16
	W	100	73	50	39	19.66	12.20	8.98	7.21	6.12	4.22	3.49	1.90