
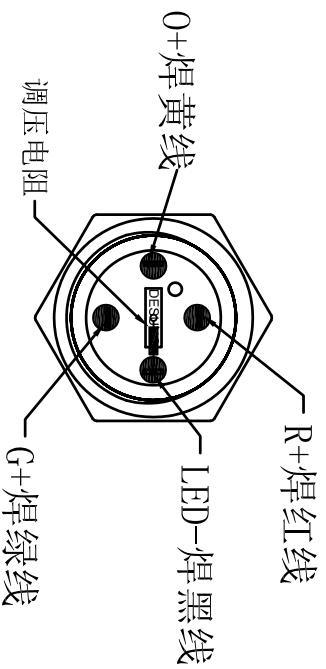


- 备注:
1. 外壳镗雕A3;
 2. 拧螺母, 配垫圈。

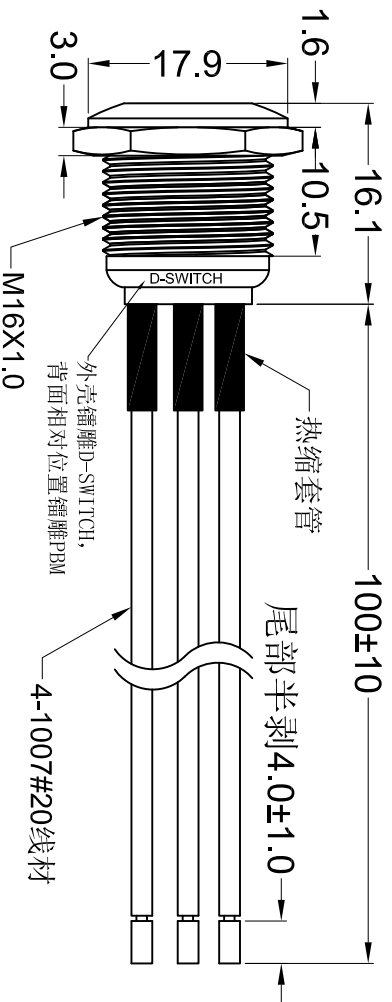

Nut Torque:5~14Nm

Protection Grade:IP65,IK08

Shell:Brass,Ni Plating

Base:PBT+15%GF

Lamp Type:LED

Forward current:20mA Max

Lamp Life:50000H

Beads Color:Red,Green And Orange



Lamp voltage:24V DC

Operating Temperature:-20°C~80°C

Relative Air Humidity:45%~85%

Safety Approval:   

CUT-OUT

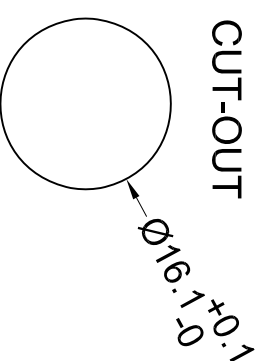

D-SWITCH
东莞市德松电子有限公司
D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES .X±0.5 .XX±0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	版本 VERSION	A0	比例尺 SCALE	1:1	日期 DATE	2022.03.30	品名 TITLE	图号 DRAWING NO
				核准 APPROVED BY		核对 CHECKED BY		绘图 DRAWN BY	孙成	PBM-16R12-FS-RG03-R24-B8S-A3-0004 (L-100-1007#20-R3Y1B)	1030457