EP27122A

INTERNATIONAL RECTIFIER IOR


Provisional Data

1BQ SERIES

1A single phase D.I.L. Schottky bridge

FEATURES

- Convenient DIP case design conforming to standard 0.1 inch lead spacing
- Wide operational and storage temperature ranges from −55°C to +150°C
- 20 volts and 40 volts VRRM
- 0.65 volts V_F @ 1.0 A per diode
- Moisture Resistant Expoxy Case

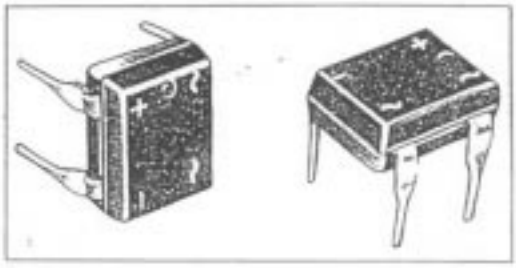


SPECIFICATIONS

ELECTRICAL RATINGS and CHARACTERISTICS

$I_{O(AV)}$	Maximum average output current T_{amb} = 45°C	1 A
I_{FSM}	Maximum, peak one cycle, non repetitive forward current 10ms	30 A.
V_{FM}	Maximum peak forward voltage drop per diode, IFM = 1.0 A.	0.65 V
I_{RM}	Typical peak reverse current per diode at rated V_{RRM}	
	T_A = 25°C	2.0 mA
	T_A = 100°C	5.0 mA

OUTLINE

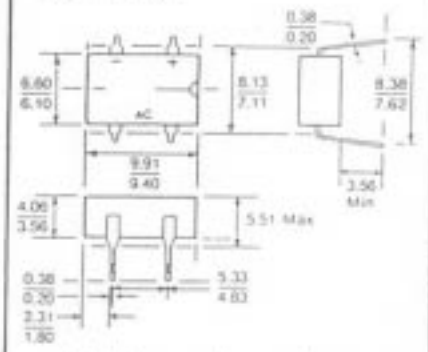

All dimensions in mm

VOLTAGE DATA

Type	V_{RRM} Volts	V_{RMS} Volts.
1BQ 20	20	14
1BQ 40	40	28

The current flow in a Schottky barrier rectifier is due to majority carrier conduction and is not affected by reverse transients due to stored charge and minority carrier injection as in conventional PN diodes. The Schottky barrier rectifier may be considered for purposes of circuit analysis, as an ideal diode in parallel with a variable capacitance equal in value to the junction capacitance. See Figure 1

THERMAL CONSIDERATIONS:

The derating curve of figure 2 may be used for initial design work.

Thermal runaway is entirely possible on marginal designs due to the inherently large reverse leakage of Schottky barrier rectifiers and the fact that reverse power multiplies about 1.32 times for each 5°C of junction temperature increase.

It is recommended that all designs be verified at an ambient temperature at least 10°C above the maximum at which the equipment will ever have to operate.

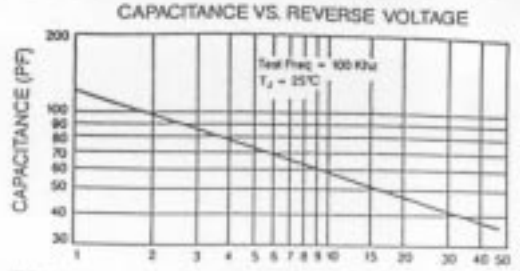


FIGURE 1

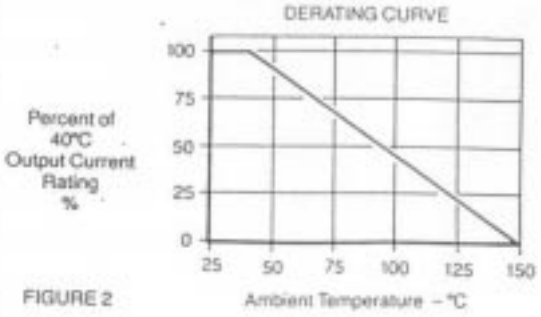


FIGURE 2

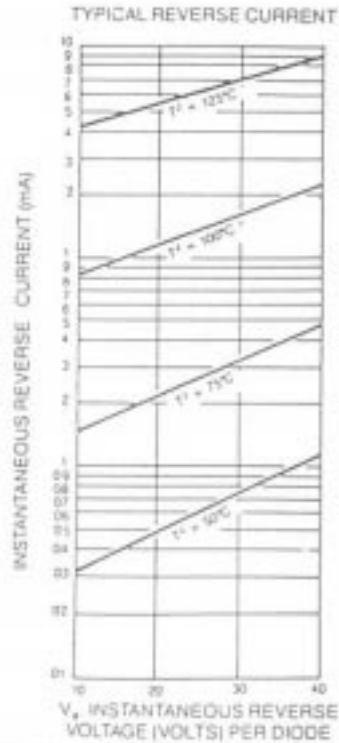


FIGURE 3

INTERNATIONAL RECTIFIER

IOR

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA. Tel: (213) 772-2000. Tlx. 4720483. Fax: (213) 772-9028.
EUROPEAN HEADQUARTERS: Hurst Green, OXTED, Surrey RH8 9BB, UK. Tel: (0883) 713215. Tlx: 95219. Fax: (0883) 714234

CANADA: 101 Bentley St., Markham, ONTARIO L3R 3L1. Tel: (416) 475-1897. Tlx: 06-966-650.
FRANCE: 123 Rue de Petit Vaux, 91360 EPINAY sur ORGE. Tel: (1) 64.54.83.29. Tlx. 600943. Fax: (1) 64.54.82.30.
GERMANY: Saalburgstr. 157, D-6380 BAD HOMBURG. Tel: (61) 72 37068. Tlx: 410404. Fax: (61) 72 37065.
ITALY: Via Lauro 49, 10071 Borgaro, TORINO. Tel: (011) 470 14 84. Tlx. 221257. Fax: (011) 470 42 90.
Via Karscha 11, 21054 MILANO. Tel: (02) 34 07 90/31 29 46.
Via Aino 1, 40139 BOLOGNA. Tel: (051) 49 33 07.
INDIA: 31 Greenacre, S Union Park, Khar (W), BOMBAY 400 052. Tel: (022) 535036/53379/540342. Tlx: 011-71481.
JAPAN: K & H Bldg. 2F, 3-30-4 Hon-Hatsudumi, Toshima-ku, TOKYO, Japan 171. Tel: (03) 983 0641. Fax: (03) 982 0642.
SINGAPORE: 190 Middle Road, #EX 10-01 Fortune Centre, SINGAPORE 0718. Tel: (65) 336 3922/337 4989/336 6280.
Fax: (65) 337 4692
SWEDEN: Box 80, S-162 12 Vallingby 1, STOCKHOLM. Tel: (08) 870035. Tlx: 12164. Fax: (08) 874242.
U.S.A.
CENTRAL ZONE: 2401 Plum Grove Rd., Suite 111, PALATINE, IL60067. Tel: (312) 397 0002. Fax: (312) 397 0114
EASTERN ZONE: 71 Grand Ave., PALISADES PARK, NJ 07650. Tel: (201) 943-4554. Tlx: 13-5477. Fax: (201) 943-5754

Sales Offices, Agents and Distributors in Major Cities throughout the World.

In the interest of product improvement INTERNATIONAL RECTIFIER reserves the right to change specifications at any time without notice.