


NOTES:

1. MATERIALS:
 BODY AND SHROUD: BRASS PER ASTM B16
 CONTACT: BERYLLIUM COPPER PER ASTM B196
 INSULATOR: TEFLON PER ASTM D1710
 RETAINING RING: BERYLLIUM COPPER PER ASTM B194
2. FINISH:
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204
 OVER .000050 MIN. NICKEL PER QQ-N-290
3. FOR USE WITH RG-316 DOUBLE SHIELDED OR EQUIVALENT CABLE.

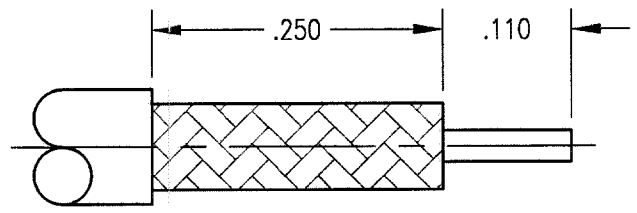

TRIMMING DIMENSIONS

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

| REV. | DESCRIPTION OF CHANGE | DATE | DRN | APPR |
|------|-----------------------|---------|-----|--------------------|
| A | ECN 2197 | 2/19/99 | JMC | <i>[Signature]</i> |
| - | RELEASED PER NPR 683 | 1/15/98 | KJT | PRP |

UNLESS OTHERWISE SPECIFIED
 TOLERANCES: 3 PLACE DECIMALS $\pm.005$ 2 PLACE DECIMALS $\pm.010$
 FRACTIONS $\pm 1/64$ ANGLE $\pm 2^\circ$
 ALL DIMENSIONS PRIOR TO PLATING
 CHAMFER 1ST THREAD 45° TO ROOT DIAMETER
 REMOVE ALL BURRS AND SHARP EDGES
 ALL DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR
 SURFACE FINISH SHALL BE 63 MICROINCHES MAXIMUM
 DIMENSIONS IN INCHES DO NOT SCALE PRINT

SALES DRAWING

RETCONN
 A SUBSIDIARY OF SPM
 199 W. PEARL ROAD TORRINGTON, CT. 06790
 TEL. (860) 489-1220 FAX (860) 496-7307

TITLE
 STRAIGHT CRIMP/CRIMP SMB PLUG

| | | | | |
|--------------|---------------------------|----------------|--------------|---------|
| DRAWN KJT | DATE 1/15/98 | CHECKED JMC | SCALE 6:1 | FSCM OI |
| APPR. PRP | DWG. NO. 510-900-0631H | REV | | |