



### 1. Mechanical Dimensions:

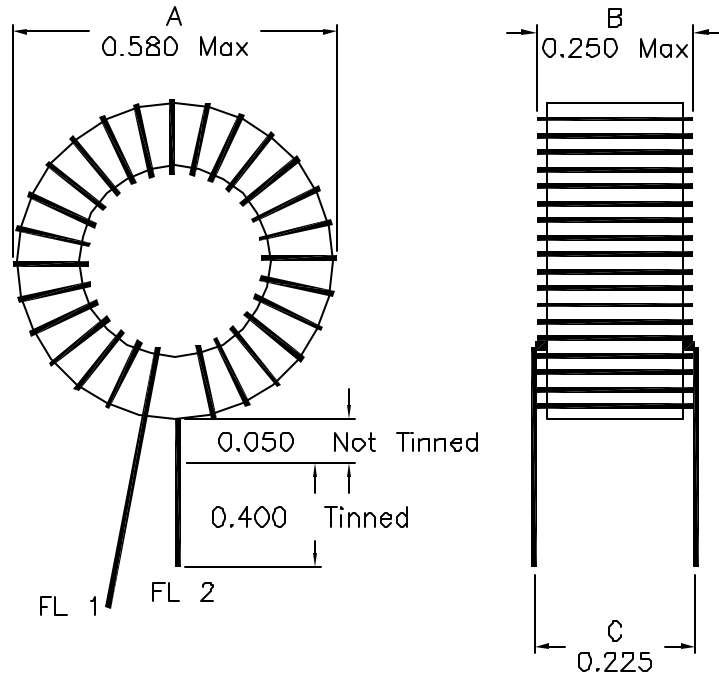

### 2. Schematic:



Core: Micrometals T50-26 or equivalent Epoxy coated

### 3. Electrical Specifications:

Inductance: 76uH±10% @100KHz,0.1V

DC Resistance: 0.150 Ohms Max

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

Doc Rev: A/2

<b>XFMRs Inc.</b>	Title: Toroid Filter Inductor L2	
	P/N: XF0766-VO	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in Inch	DWN.	李小锋 Mar-17-03
	CHK.	廖玉坤 Mar-17-03
	APP.	Joe Huff Mar-17-03