

## FEATURES

- ▶ Industry Standard 1" X 1" Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ High Efficiency up to 87%
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Designed-in Conducted EMI meets EN55022 Class A & FCC Level A
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval



## PRODUCT OVERVIEW

The MINMAX MJWI10 series are cost optimized dc-dc converter modules offering 10W output power in a 1"x1"x0.4" shielded metal package with industry standard pinout. All models provide ultra-wide 4:1 input voltage range and tight output voltage regulation.

State-of-the-art circuit topology provides a high efficiency up to 87% which allows an operating temperature range of -40°C to +80°C. Further features include remote On/Off, overload protection and conducted EMI compliance to EN55022, class A.

Typical applications for these converters are battery operated equipment, instrumentation, distributed power architectures in communication and industrial electronics and other space critical applications.

### Model Selection Guide

| Model Number  | Input Voltage (Range) | Output Voltage | Output Current |      | Input Current |          | Max. capacitive Load | Efficiency (typ.) |
|---------------|-----------------------|----------------|----------------|------|---------------|----------|----------------------|-------------------|
|               |                       |                | Max.           | Min. | @Max. Load    | @No Load |                      |                   |
|               |                       |                | mA             | mA   | mA(typ.)      | mA(typ.) | μF                   | @Max. Load %      |
| MJWI10-24S033 | 24<br>(9 ~ 36)        | 3.3            | 2200           | 330  | 352           | 30       | 560                  | 86                |
| MJWI10-24S05  |                       | 5              | 2000           | 300  | 496           |          | 560                  | 84                |
| MJWI10-24S051 |                       | 5.1            | 2000           | 300  | 506           |          | 560                  | 84                |
| MJWI10-24S12  |                       | 12             | 830            | 125  | 483           |          | 150                  | 86                |
| MJWI10-24S15  |                       | 15             | 660            | 100  | 474           |          | 150                  | 87                |
| MJWI10-24S24  |                       | 24             | 410            | 62   | 477           |          | 68                   | 86                |
| MJWI10-24D05  |                       | ±5             | ±1000          | ±150 | 496           |          | 220#                 | 84                |
| MJWI10-24D12  |                       | ±12            | ±410           | ±62  | 477           |          | 100#                 | 86                |
| MJWI10-24D15  |                       | ±15            | ±330           | ±50  | 474           |          | 100#                 | 87                |
| MJWI10-48S033 | 48<br>(18 ~ 75)       | 3.3            | 2200           | 330  | 180           | 20       | 560                  | 85                |
| MJWI10-48S05  |                       | 5              | 2000           | 300  | 248           |          | 560                  | 84                |
| MJWI10-48S051 |                       | 5.1            | 2000           | 300  | 253           |          | 560                  | 84                |
| MJWI10-48S12  |                       | 12             | 830            | 125  | 241           |          | 150                  | 86                |
| MJWI10-48S15  |                       | 15             | 660            | 100  | 237           |          | 150                  | 87                |
| MJWI10-48S24  |                       | 24             | 410            | 62   | 238           |          | 68                   | 86                |
| MJWI10-48D05  |                       | ±5             | ±1000          | ±150 | 248           |          | 220#                 | 84                |
| MJWI10-48D12  |                       | ±12            | ±410           | ±62  | 238           |          | 100#                 | 86                |
| MJWI10-48D15  |                       | ±15            | ±330           | ±50  | 237           |          | 100#                 | 87                |

# For each output

### Input Specifications

| Parameter                         | Model            | Min.                                                      | Typ. | Max. | Unit |
|-----------------------------------|------------------|-----------------------------------------------------------|------|------|------|
| Input Surge Voltage (1 sec. max.) | 24V Input Models | -0.7                                                      | ---  | 50   | VDC  |
|                                   | 48V Input Models | -0.7                                                      | ---  | 100  |      |
| Start-Up Threshold Voltage        | 24V Input Models | ---                                                       | ---  | 9    |      |
|                                   | 48V Input Models | ---                                                       | ---  | 18   |      |
| Under Voltage Shutdown            | 24V Input Models | ---                                                       | ---  | 8.5  |      |
|                                   | 48V Input Models | ---                                                       | ---  | 17   |      |
| Short Circuit Input Power         | All Models       | ---                                                       | 2500 | ---  | mW   |
| Input Filter                      |                  | Internal Pi Type                                          |      |      |      |
| Conducted EMI                     |                  | Compliance to EN 55022, class A and FCC, part 15, level A |      |      |      |

**Remote On/Off Control**

| Parameter                   | Conditions                                | Min. | Typ. | Max. | Unit |
|-----------------------------|-------------------------------------------|------|------|------|------|
| Converter On                | 2.5V ~ 50V or Open Circuit                |      |      |      |      |
| Converter Off               | 0~1.0V or Short Circuit (Pin 2 and Pin 6) |      |      |      |      |
| Control Input Current (on)  | Vctrl = 5V                                | ---  | ---  | 500  | μA   |
| Control Input Current (off) | Vctrl = 0V                                | ---  | ---  | -500 | μA   |
| Control Common              | Referenced to Negative Input              |      |      |      |      |
| Standby Input Current       |                                           | ---  | ---  | 10   | mA   |

**Output Specifications**


| Parameter                       | Conditions                      | Min. | Typ.  | Max.  | Unit              |
|---------------------------------|---------------------------------|------|-------|-------|-------------------|
| Output Voltage Setting Accuracy |                                 | ---  | ---   | ±2.0  | %Vnom.            |
| Output Voltage Balance          | Dual Output, Balanced Loads     | ---  | ±1.0  | ±2.0  | %                 |
| Line Regulation                 | Vin=Min. to Max. @Full Load     | ---  | ±0.3  | ±1.0  | %                 |
| Load Regulation                 | Io=15% to 100%                  | ---  | ±0.5  | ---   | %                 |
| Ripple & Noise                  | 0-20 MHz Bandwidth              | ---  | ---   | 100   | mV <sub>p-p</sub> |
| Transient Recovery Time         | 25% Load Step Change            | ---  | 300   | 600   | μsec              |
| Transient Response Deviation    |                                 | ---  | ±3    | ±6    | %                 |
| Temperature Coefficient         |                                 | ---  | ±0.01 | ±0.02 | %/°C              |
| Over Load Protection            | Hiccup                          | 110  | 150   | ---   | %                 |
| Short Circuit Protection        | Hiccup Mode, Automatic Recovery |      |       |       |                   |

**General Specifications**


| Parameter                 | Conditions                                                             | Min.    | Typ. | Max. | Unit  |
|---------------------------|------------------------------------------------------------------------|---------|------|------|-------|
| I/O Isolation Voltage     | 60 Seconds                                                             | 1500    | ---  | ---  | VDC   |
|                           | 1 Second                                                               | 1800    | ---  | ---  | VDC   |
| I/O Isolation Resistance  | 500 VDC                                                                | 1000    | ---  | ---  | MΩ    |
| I/O Isolation Capacitance | 100KHz, 1V                                                             | ---     | ---  | 1500 | pF    |
| Switching Frequency       |                                                                        | ---     | 450  | ---  | KHz   |
| MTBF(calculated)          | MIL-HDBK-217F@25°C, Ground Benign                                      | 350,000 |      |      | Hours |
| Safety Approvals          | UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report) |         |      |      |       |

**Environmental Specifications**

| Parameter                                                         | Conditions                     | Min. | Max. | Unit     |
|-------------------------------------------------------------------|--------------------------------|------|------|----------|
| Operating Ambient Temperature Range<br>(See Power Derating Curve) | Natural Convection             | -40  | +80  | °C       |
| Case Temperature                                                  |                                | ---  | +100 | °C       |
| Storage Temperature Range                                         |                                | -50  | +125 | °C       |
| Humidity (non condensing)                                         |                                | ---  | 95   | % rel. H |
| Cooling                                                           | Natural Convection             |      |      |          |
| RFI                                                               | Six-Sided Shielded, Metal Case |      |      |          |
| Lead Temperature (1.5mm from case for 10Sec.)                     |                                | ---  | 260  | °C       |

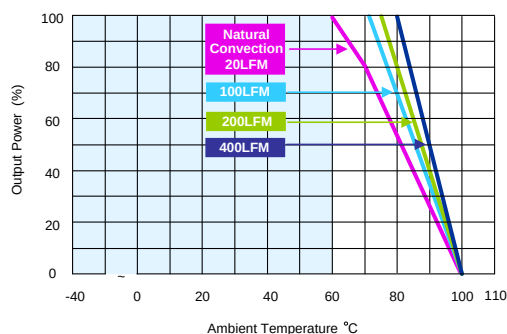**Power Derating Curve**


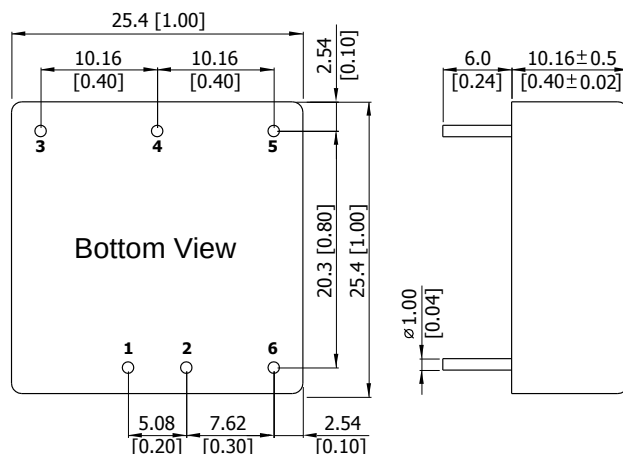
Derating Curve without Heatsink

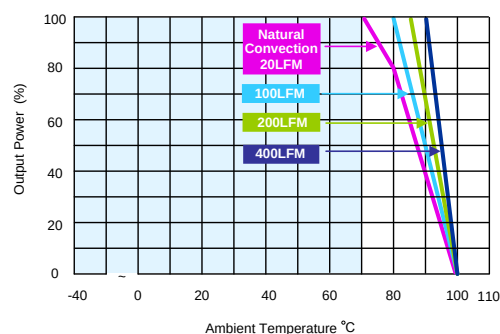

Derating Curve with Heatsink

**Notes**

- 1 Specifications typical at  $T_a = +25^\circ\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact factory.
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM)
- 7 Specifications are subject to change without notice.


**Package Specifications**
**Mechanical Dimensions**

**Pin Connections**

| Pin | Single Output | Dual Output   |
|-----|---------------|---------------|
| 1   | +Vin          | +Vin          |
| 2   | -Vin          | -Vin          |
| 3   | +Vout         | +Vout         |
| 4   | No Pin        | Common        |
| 5   | -Vout         | -Vout         |
| 6   | Remote On/Off | Remote On/Off |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance:  $X.X \pm 0.25$  ( $X.XX \pm 0.01$ )  
 $X.XX \pm 0.13$  ( $X.XXX \pm 0.005$ )
- ▶ Pin diameter  $\varnothing 1.0 \pm 0.05$  ( $0.04 \pm 0.002$ )

**Physical Characteristics**
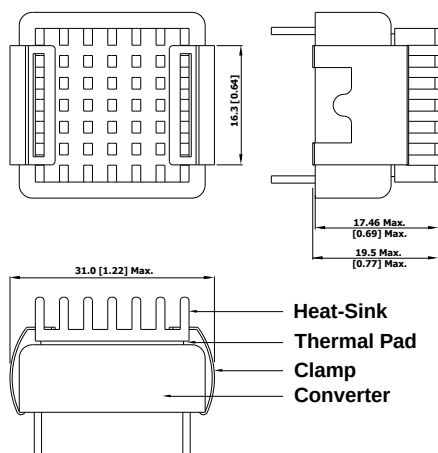
|               |                                                     |
|---------------|-----------------------------------------------------|
| Case Size     | : 25.4x25.4x10.16mm (1.0x1.0x0.4 inches)            |
| Case Material | : Aluminium Alloy, Black Anodized Coating           |
| Base Material | : FR4 PCB (flammability to UL 94V-0 rated)          |
| Pin Material  | : Copper Alloy with Gold Plate Over Nickel Subplate |
| Weight        | : 15g                                               |

**Heatsink (Option -HS)**
**Mechanical Dimensions**


Heatsink Material: Aluminum  
Finish: Anodic treatment (black)  
Weight: 2g

► The advantages of adding a heatsink are:

1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.


**Order Code Table**

| Standard      | With heatsink    |
|---------------|------------------|
| MJWI10-24S033 | MJWI10-24S033-HS |
| MJWI10-24S05  | MJWI10-24S05-HS  |
| MJWI10-24S051 | MJWI10-24S051-HS |
| MJWI10-24S12  | MJWI10-24S12-HS  |
| MJWI10-24S15  | MJWI10-24S15-HS  |
| MJWI10-24S24  | MJWI10-24S24-HS  |
| MJWI10-24D05  | MJWI10-24D05-HS  |
| MJWI10-24D12  | MJWI10-24D12-HS  |
| MJWI10-24D15  | MJWI10-24D15-HS  |
| MJWI10-48S033 | MJWI10-48S033-HS |
| MJWI10-48S05  | MJWI10-48S05-HS  |
| MJWI10-48S051 | MJWI10-48S051-HS |
| MJWI10-48S12  | MJWI10-48S12-HS  |
| MJWI10-48S15  | MJWI10-48S15-HS  |
| MJWI10-48S24  | MJWI10-48S24-HS  |
| MJWI10-48D05  | MJWI10-48D05-HS  |
| MJWI10-48D12  | MJWI10-48D12-HS  |
| MJWI10-48D15  | MJWI10-48D15-HS  |

## Test Setup



### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

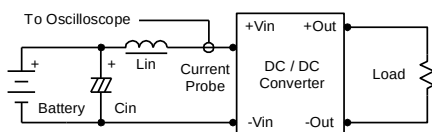

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

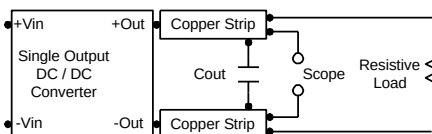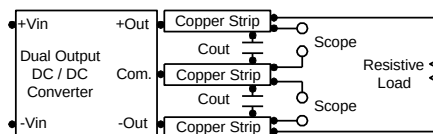

## Technical Notes

### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal.

The switch can be an open collector or equivalent. A logic low is 0V to 1V. A logic high is 2.5V to 50V. The maximum sink current at on/off terminal during a logic low is -500 $\mu$ A. The maximum allowable leakage current of the switch at on/off terminal (2.5 to 50V) is 500 $\mu$ A.

### Overload Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.



In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 KHz) capacitor of a 6.8 $\mu$ F for the 24V and 48V devices.

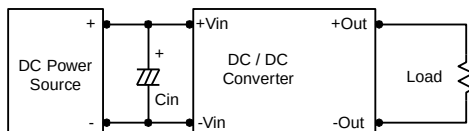

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.

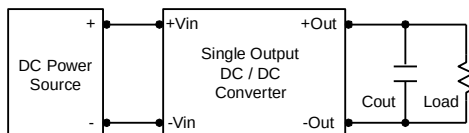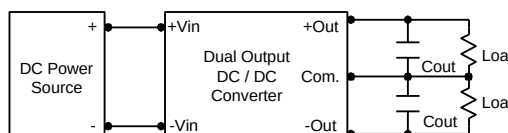

### Maximum Capacitive Load

The MJWI10 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100°C. The derating curves are determined from measurements obtained in a test setup.

