
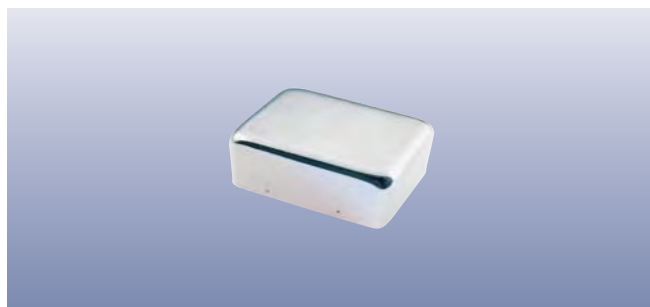


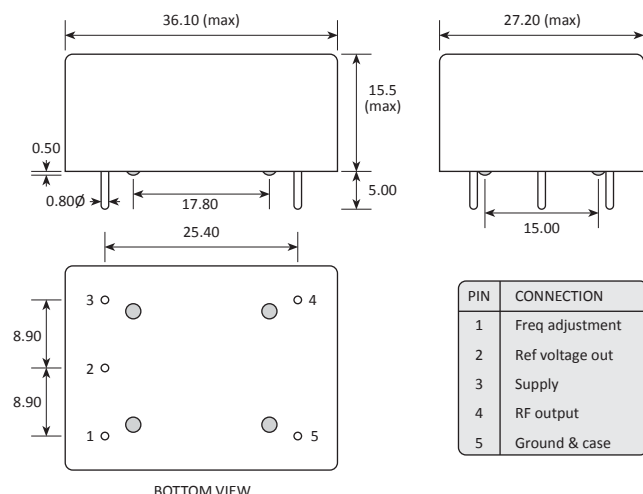

Features

- Low height compact package
- Temperature stability down to 5ppb
- Single 12V supply (15v or 18V optional)
- Standard European IEC CO-08 pin-out
- Custom options available

Specifications

Parameters	Product HCD371	Option Codes
Frequency range: 5.0 ~ 20.0MHz	■	
Ageing per day (at despatch): < $\pm 1 \times 10^{-9}$ < $\pm 5 \times 10^{-10}$ < $\pm 2 \times 10^{-10}$	□ ■ □	D E F
Frequency stability: < $\pm 5 \times 10^{-8}$ per year < $\pm 1 \times 10^{-9}$ per 10% change in V_{DD}	■ ■	
Allan deviation (ADEV), 1 sec: < $\pm 1 \times 10^{-11}$	■	
Temperature stability: < $\pm 2 \times 10^{-8}$ < $\pm 1 \times 10^{-8}$ < $\pm 5 \times 10^{-9}$	□ ■ □	P R S
Operating temperature range: 0 to +50°C -10 to +60°C -20 to +70°C	□ □ ■	A C F
Storage temperature range: -40 to +90°C	■	
Output waveform: CMOS / TTL compatible	■	
Frequency adjustment: $\pm 5 \times 10^{-7}$ (typ) over +0.5 to +7.0V (sufficient for 10 years ageing min) Stabilised +7.0V supply provided	■	
Supply voltage (V_{DD}): +12V ($\pm 0.5V$) +15V ($\pm 0.5V$) +18V ($\pm 0.5V$)	■ □ □	N P R
Power consumption: 5.0W max at switch on 1.2W typ when stabilised at 25°C	■ ■	
Warm up: < $\pm 1 \times 10^{-8}$ after 10mins at +20°C	■	
Phase noise (@ 10.0MHz): < -125 dBc/Hz @ 10Hz < -135 dBc/Hz @ 100Hz < -150 dBc/Hz @ 1kHz < -155 dBc/Hz @ 10kHz < -155 dBc/Hz @ 50kHz	■ ■ ■ ■ ■	
Harmonics: < -30dB wrt carrier	■	
Shock: IEC 68-2-27 Test Ea 50G for 11ms	■	
Vibration: IEC 68-2-06 Test Fc 10-55Hz, 1.5mm. 55-500Hz, 10G	■	

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Part No, or product name + option codes + frequency
eg: **HCD371/DPFN 10.0MHz**

HCD371/ERFN 5.0MHz

Option code X (eg HCD371/X) denotes a custom specification.