
VDSL Transformer

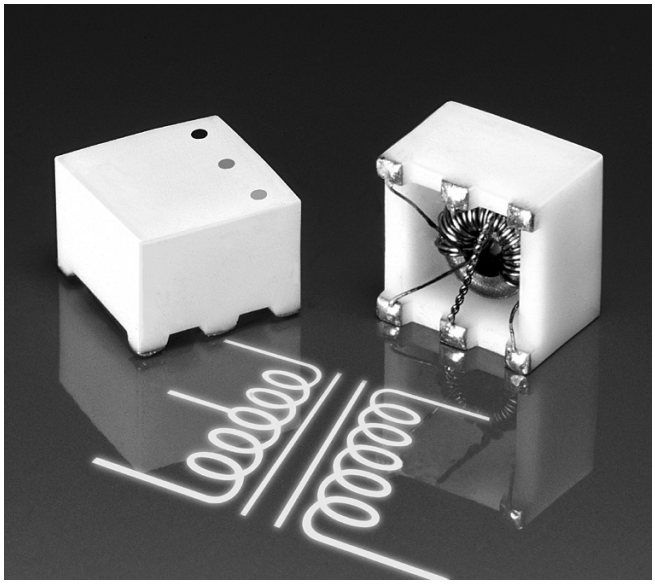

Measuring less than 0.25″ (6,4 mm) square, the unique leadless design of Coilcraft's VDSL line transformer makes it ideal for high density DSLAM boards.

Its simple ceramic case totally eliminates coplanarity problems and also makes the transformers extremely economical.

The VD9233-B has been optimized for use with Broadcom and other VDSL chip sets. Custom versions are also available to fit specific applications.


For free evaluation samples, contact Coilcraft or visit the Coilcraft web site.

Part number	Impedance ratio pri : sec	–3 dB Bandwidth (MHz)	Isolation (Vrms)	Pins 1-3 L min (µH)	Pins 1-3 DCR max (Ohms)	Pins 6-4 L min (µH)	Pins 6-4 DCR max (Ohms)	Color code
VD9233-B	1 : 1	0.0065 – 255	1500	320	0.160	320	0.180	Green, Black, Brown

1. Operating temperature range –40° C to +85°C.
2. Electrical specifications at 25°C.


Dimensions


All dimensions ±0.005″ / ±0,127 mm

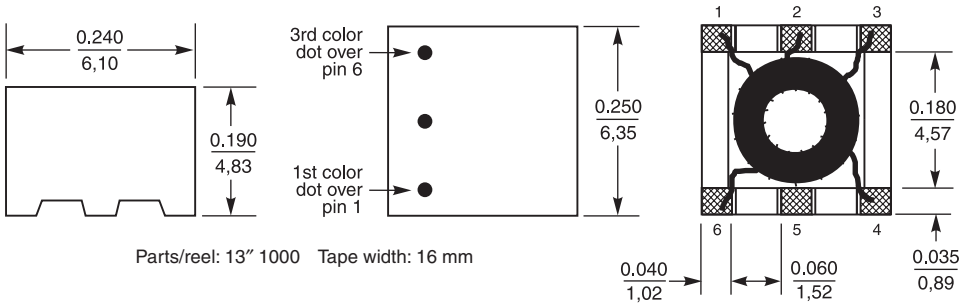

Parts/reel: 13″ 1000 Tape width: 16 mm

Recommended Land Pattern

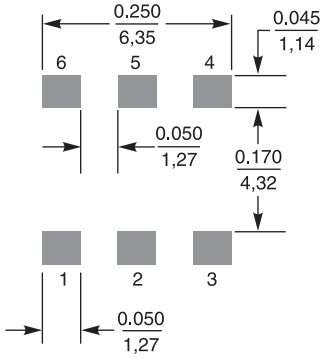



Coilcraft®
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 271 Revised 11/01/12

© Coilcraft Inc. 2012
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check out web site for latest information.