

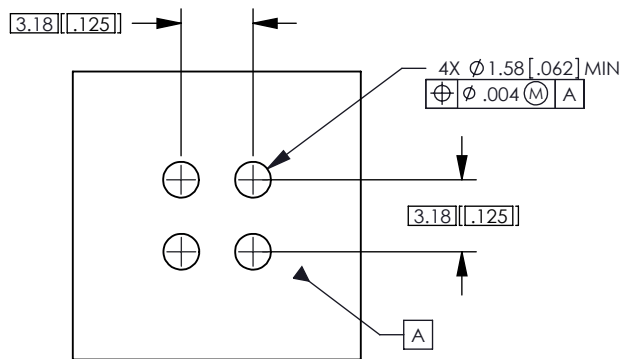
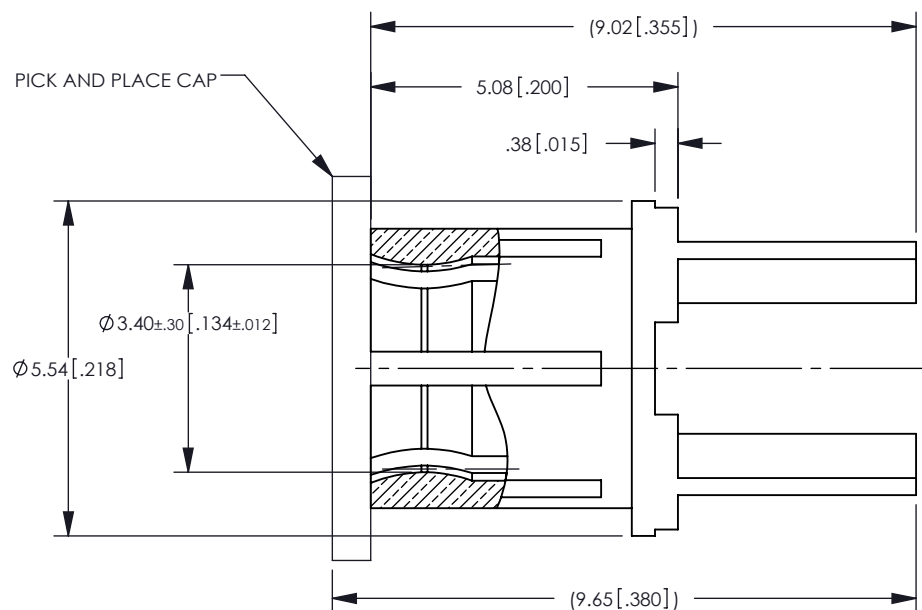


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS:
CONTACT: BERYLLIUM COPPER PER ASTM B196
CAP: PTFE
3. FINISH SPECIFICATIONS:
0.8 TO 1.3 μ m GOLD PER ASTM-B4888 OVER
1.3 TO 3.3 μ m NICKEL PER AMS-QQ-N-290
4. ELECTRICAL SPECIFICATIONS:
RATED CURRENT: 40 AMPS DC
CONTACT RESISTANCE: 3.0 MILLIOHMS MAX
5. MOTOROLA P/N 0988653T01, REV.C
6. PARTS SHALL BE TAPE AND REEL PACKAGED, 400 PIECES PER REEL PER MOTOROLA SPECIFICATION 12M05019A73_Z.

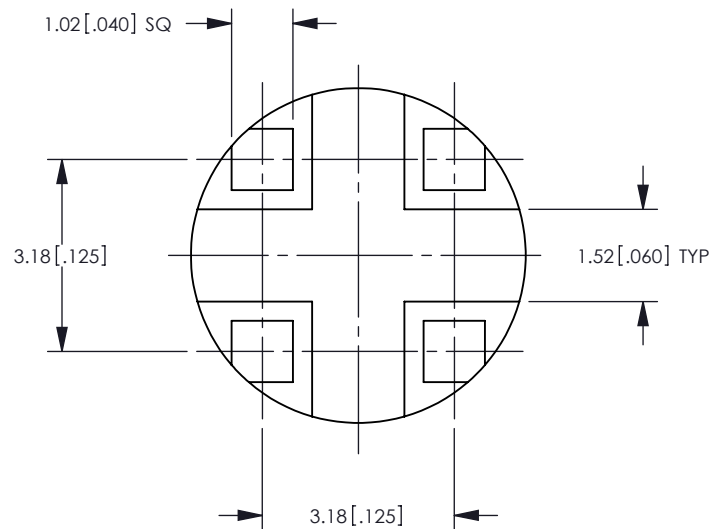

RECOMMENDED PCB LAYOUT



CATALOG P/N: 01422

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES] TOLERANCES: DECIMAL: .XX [X.X] $\pm$.01 [0.3] .XXX [X.XX] $\pm$.005 [0.13] .XXXX [X.XXX] $\pm$.XXXX ANGLES: $\pm 2^\circ$ SCALE: 8:1				WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING				POWER SNAP JACK RECEPTACLE 4 LEG THRU HOLE (MOTOROLA)	
DRAWN Dcam	DATE 11/27/06	APPROVED Dcam	DATE 01/08/09	A	SD01422
APPROVED WPM	DATE 01/08/09	APPROVED DAO	DATE 01/08/09		
				SHT 1 OF 1	REV A