P/N: S8630 DATA SHEET

Feature



- Fast rise time compatible with standards.
- Surface mount packages available.
- Operating temperature range: 0℃ to +70℃.
- Storage temperature range: -25℃ to +125℃.

Electrical Specifications@25°C						
Part Number	Turns Ratio (±2%)	OCL (uH Min)	$C_{W/W}$ (pF Max)	L.L (uH Max)	Primary Pins	HI-POT (Vrms)
S8630	1:2CT	19	10	0.06	1-5	3000

Schematic

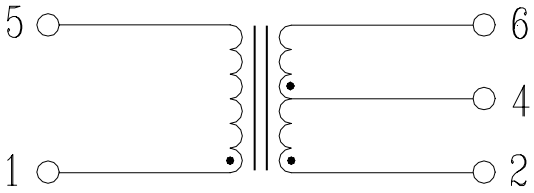

Mechanical

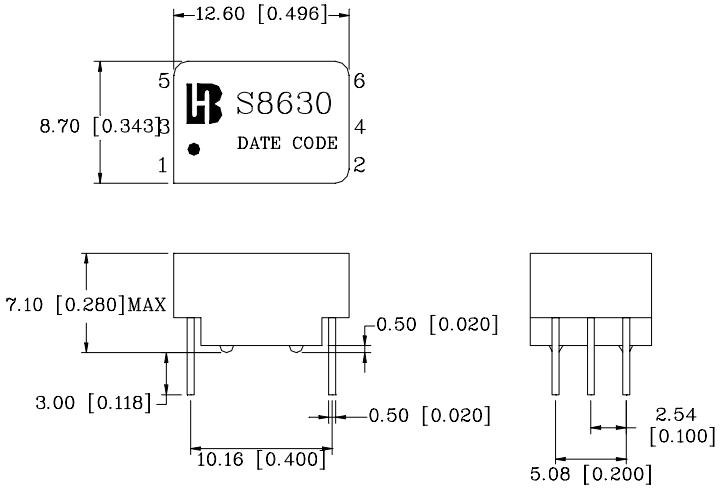

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]