
LF (125 kHz)

BIS L-503-PU1-10
Order Code: BCC00R3

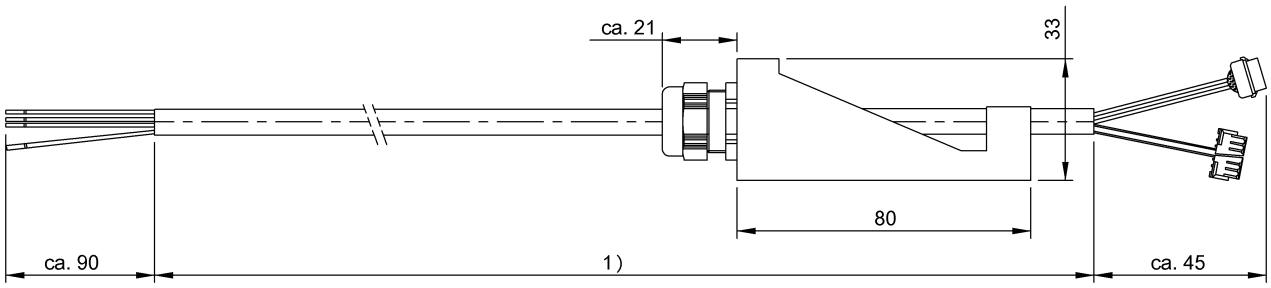

1) Cable length see text

Basic features

Approval/Conformity	CE WEEE EAC
Principle of operation	Connection cable

Electrical connection

Bending radius min., flexible cable	12.5 x D
Cable diameter D	7.50 mm
Cable length L	3.3 m, Drag chain compatible
Connection type	Cable with connection housing, 3.30 m, PU

Environmental conditions

Cable temperature, drag chain	-30...90 °C
Cable temperature, fixed routing	-50...90 °C
Cable temperature, flexible routing	-30...90 °C
IP rating	IP67, installed

Interface

Interface	parallel

Material

Housing material	PBT
Material jacket	PU

Remarks

Connector unit: for connecting BIS L-405-xx-MU drag chain compatible
Mounting base made of PBT with open cable end.