



### 1. Mechanical Dimensions:

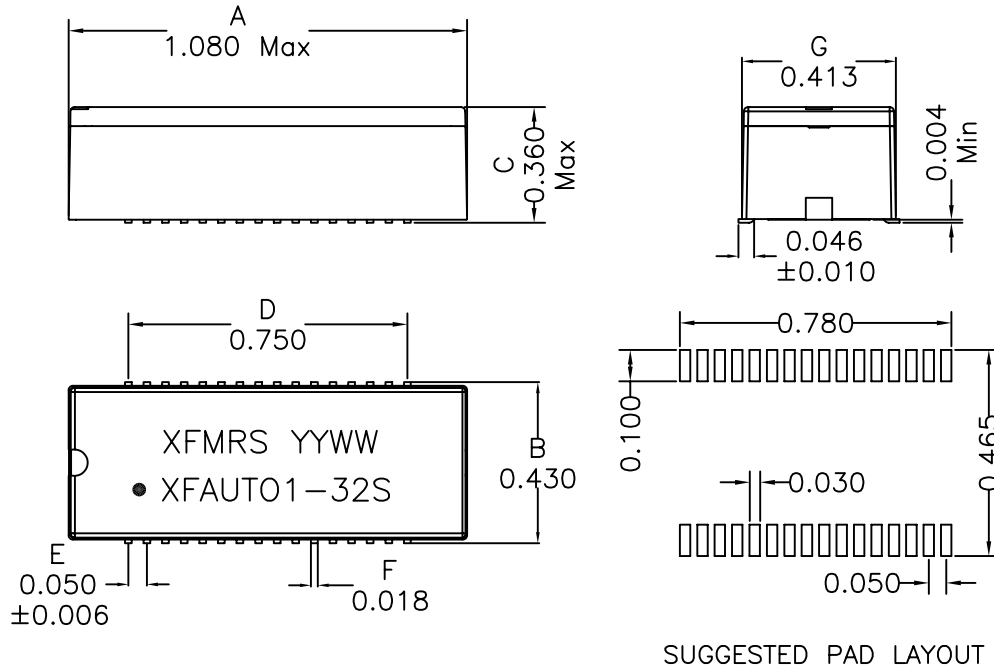

### 2. Schematic:

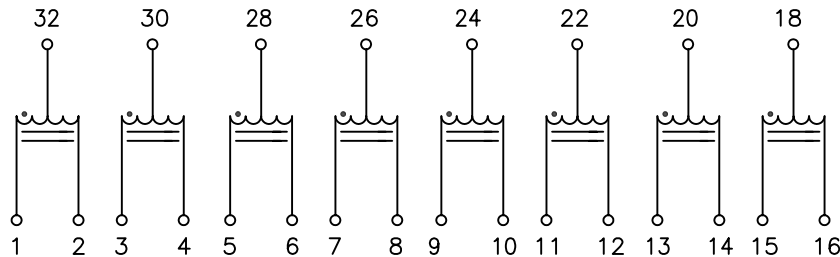

### 3. Electrical Specifications: @25°C

OCL: 350uH Min @100KHz 0.1V

Q: 8 Min @10KHz 50mV

DCR: 0.90 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Includes bottom lid.

DOC. REV: B/2

<b>XFMRS Inc</b> www.XFMRS.com	Title: AUTO-TRANSFORMER MODULE			
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XFAUTO1-32S	REV. B	
.xxx ±0.010	DWN.	Mei Chen	Jan-12-12	
Dimensions in INCH	CHK.	YK Liao	Jan-12-12	
SHEET 1 OF 1	APP.	BW	Jan-12-12	