
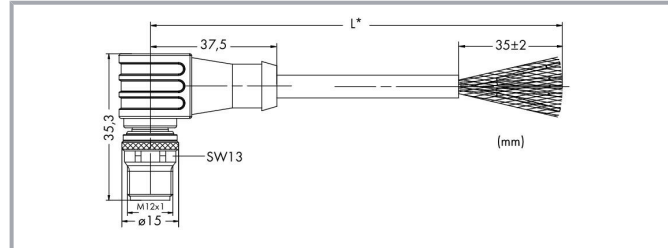


Data sheet | Item number: 756-1104/060-065

PROFIBUS cable; M12B plug; angled; 5-pole; Length: 6.5 m



[www.wago.com/756-1104/060-065](http://www.wago.com/756-1104/060-065)

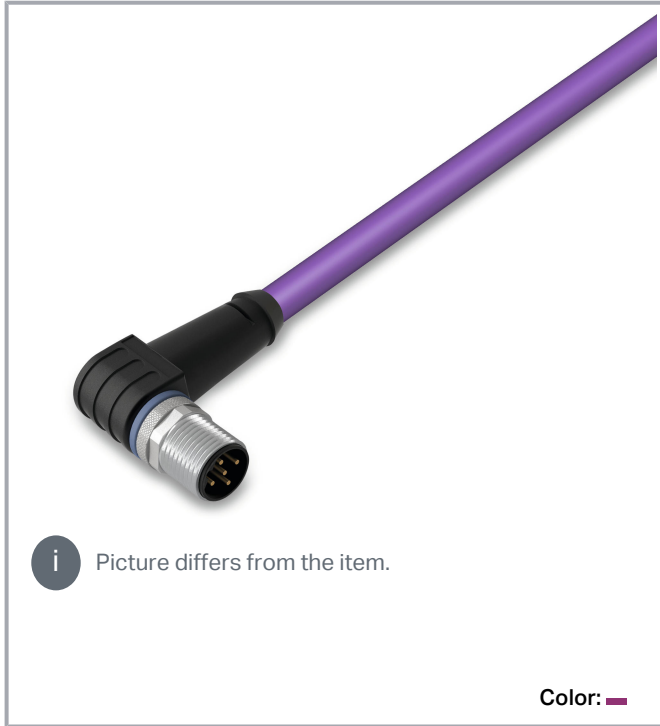

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

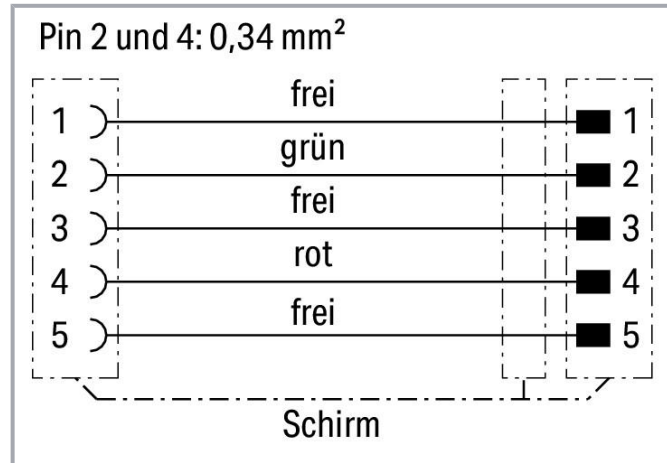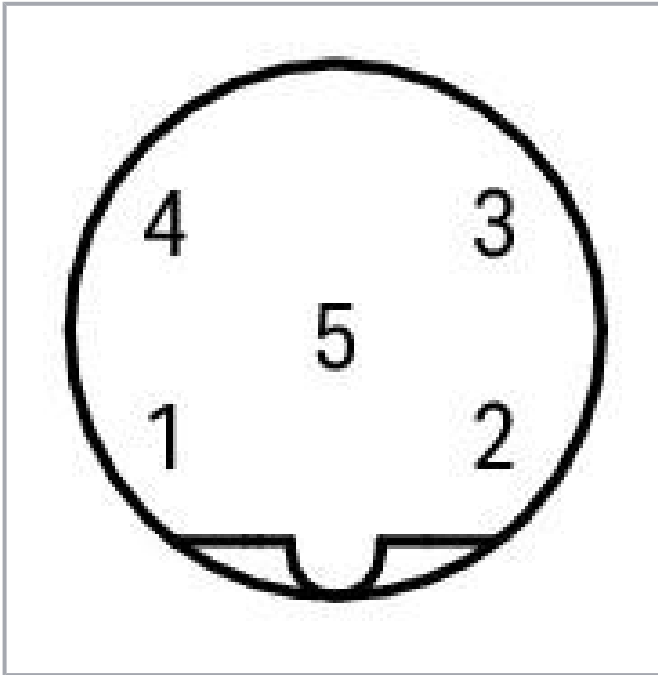

## Item description

### Short description:

- PUR, halogen-free
- Suitable for drag chains
- Silicon- and PVC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance

## Data

### Technical data

Connection type	M12 plug - free end
Pole No.	5
Cable connection direction to mating direction	90°
Connector interface coding (cable/adapter) 1 1	B-coded
Cable length	6.5 m
Communication/fieldbus	PROFIBUS
Operating voltage	≤ 300 V
Operating current	4 A
Rated surge voltage	2 kV

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



Insulation resistance	> 2500 M $\Omega$ /km
Conductor resistance	max. 55 $\Omega$ /km; Loop resistance: max. 110 $\Omega$ /km

## Mechanical data

Bending radius	> 10 x cable $\emptyset$ (flexible use); > 5 x cable $\emptyset$ in drag chain (fixed installation)
Bending cycles	1 Mio.
Drag chain suitability	yes
Sheathed cable diameter	7.3 ... 7.9 mm
Type code	LI02YS-(ST)CB11Y 1X(2X0.34SQMM)
Shield	Shielding braid, (approx. 5.90 mm $\emptyset$ ), tinned CU-ETP1, coverage 85 % $\pm$ 5 %
Conductor design	Bare copper wire (19 x 0.15 mm)
Conductor insulation	PE (halogen-free); Filler: PP yarn
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	200 g
Color	violet

## Environmental requirements

Surrounding air (operating) temperature (dynamic)	-25 ... +60 $^{\circ}$ C
Surrounding air (operating) temperature (static)	-50 ... +60 $^{\circ}$ C
Protection type	IP67
Pollution degree (5)	3/2 per IEC 60664-1

## Commercial data

PU (SPU)	1 Stück
Packaging type	box
Country of origin	DE
GTIN	4055143024556
Customs tariff number	85444290900

## Approvals / Certificates

### UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>UL</b> Underwriters Laboratories Inc.	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!



---

## Downloads

### Documentation

#### System Description

I/O-SYSTEM – SPEEDWAY, General Product Information

pdf  
1.1 MB

[Download](#)

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-1104/060-065  
PROFIBUS cable; M12B plug; angled; 5-pole; Length: 6.5 m

URL

[Download](#)

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.