



## HIRSCHMANN MOBILITY

**Cellular (2G/3G/4G)/  
GNSS (GPS/GLONASS)  
Adhesive Antenna**

**CGN 7026 LP A**

**Part Number 920-625-001**

### Features

- Combination antenna for positioning and data-services
- Terrestrial based transmission and satellite-based positioning
- Embedded high performance LNA with dual feed ceramic patch antenna and phase shift network for optimized cross polarization discrimination(XPD)
- Mounting by adhesive foam pad on metallic and non metallic ground as well as on glass
- Designed for installation in harsh environment

Some technical optimization with minor effect to the overall performance of this product are still pending. This document will be updated according the finalization of the optimization measures without prior information.

### Technical Data

Dimensions	121 mm x 77 mm x 37 mm
Weight	ca. 165 g
Temperature range	-40°C - +85°C
Protection class	IP6k6 (acc. ISO 20653)
Cable type	RG 174

## Technical Data

Cellular	
Frequency range	Low: 698 - 960 MHz High: 1710 - 2690 MHz
Services	2G: GSM 850/900 MHz GSM 1800/1900 MHz 3G UMTS 4G: LTE-bands (1 - 10; 12 - 20; 23, 25; 26 - 30; 33 - 41; 44)
Impedance	50 Ohm
Load capacity	max. 10 W pulsed acc. GSM standard
VSWR	≤ 2.0
Gain	0 dBi <sup>1)</sup>
Load capacity	max. 10 W pulsed acc. GSM standard
Diagnostic resistor	10 kOhms
GNSS	
Frequency range	GPS: 1563 - 1587 MHz (L1) Galileo: 1559 - 1591 MHz (E1) Beidou: 1559 - 1591 MHz (B1C) GLONASS: 1593 - 1610 MHz (G1)
Impedance	50 Ohm
VSWR	≤ 2.0
Gain	1 dBic <sup>2)</sup>
Amplification	27 ±1 dB
Noise figure (50 Ohm)	≤ 2.2 dB
Voltage supply	3.0 - 5.5 VDC (remotely fed)
Current consumption	24 ±1 mA @ 5 V


<sup>1)</sup> dBi: referenced to an isotropic radiator

<sup>2)</sup> dBic: referenced to an isotropic radiator, circular polarization




## Versions

PN	Description	CELL	GNSS
920-625-001	CGN 7026 LP A	3000 ±40 mm FAKRAf, D bordeaux	3000 ±40 mm FAKRAf, C blue

### Technical Drawing

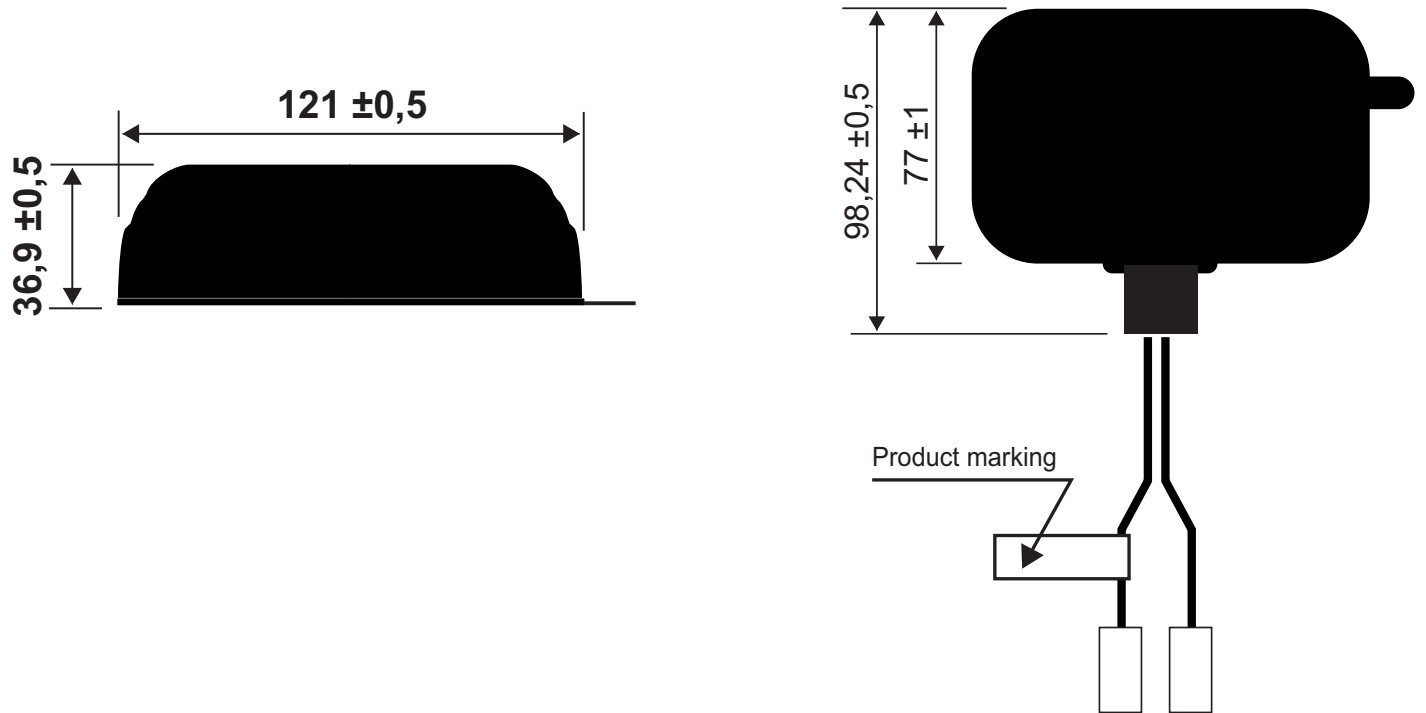


### Installation

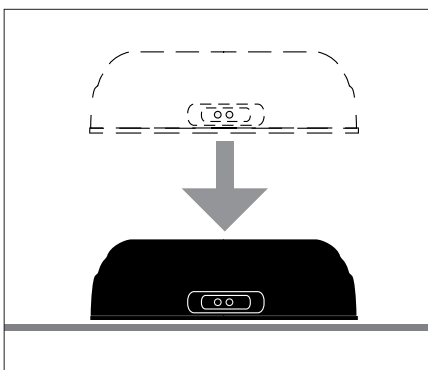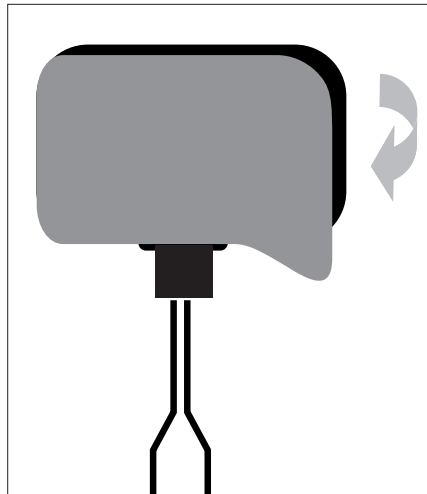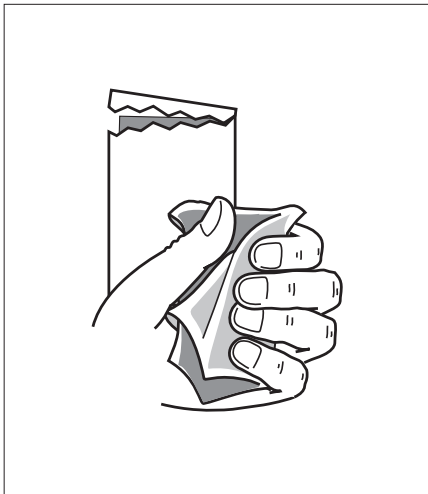


### Antenna diagrams

Typ. VSWR ( $S_{11}$ ) Cellular bands

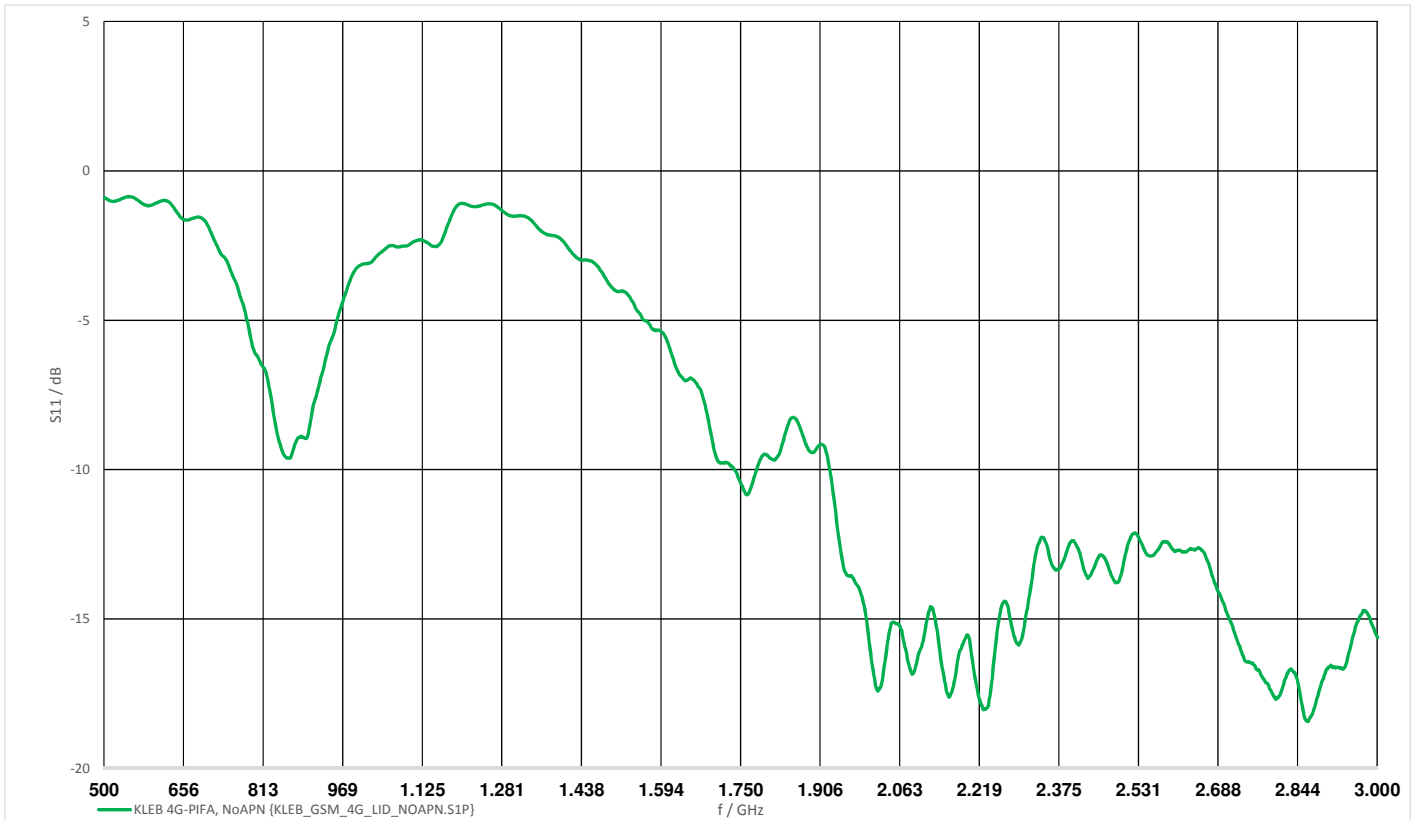

Typ. VSWR ( $S_{12}$ ) GNSS-LNA

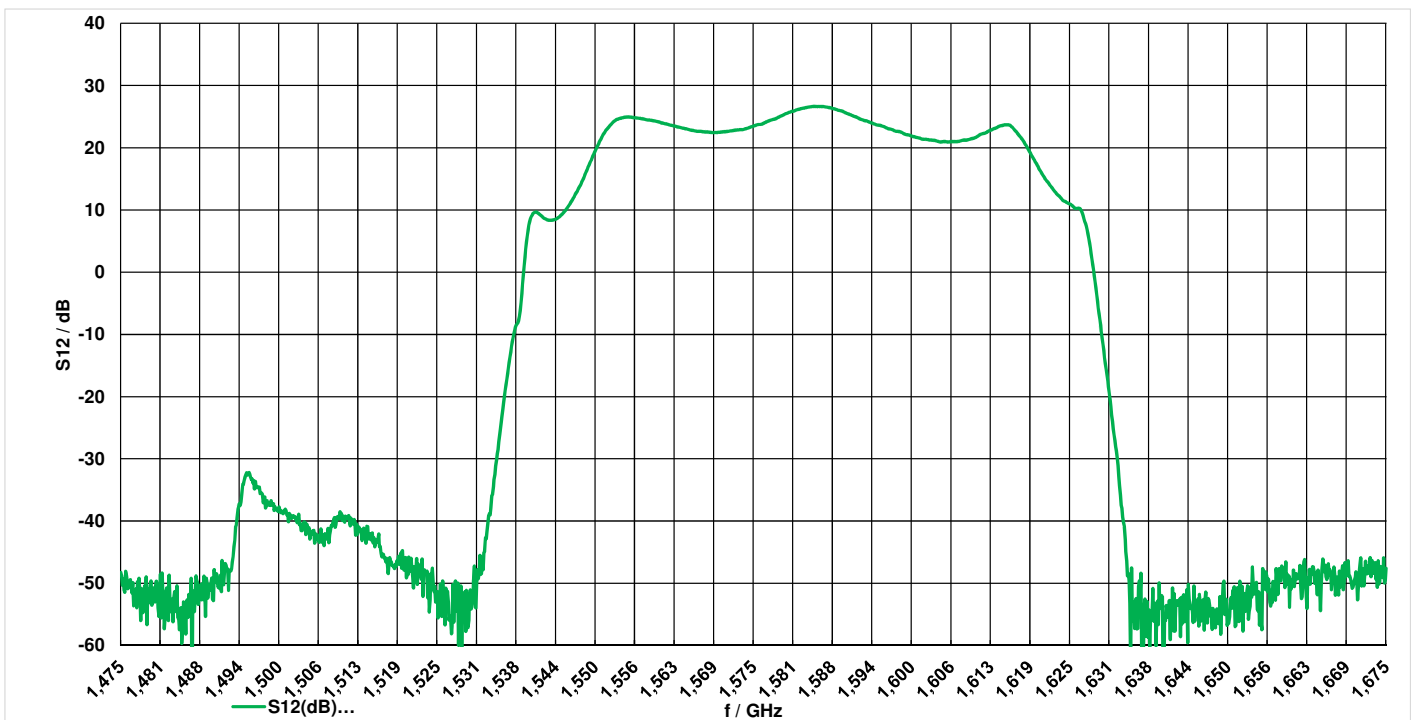

---

[te.com/hirschmann-mobility](https://te.com/hirschmann-mobility)  
[hirschmann-mobility@te.com](mailto:hirschmann-mobility@te.com)

**Hirschmann Car Communication GmbH,**  
a TE Connectivity Company  
Stuttgarter Strasse 45-51  
72654 Neckartenzlingen | Germany  
Phone: +49 7127 14-0 | Fax: +49 7127 14-1428

TE, TE Connectivity, and TE connectivity (logo) are trademarks.  
Hirschmann, LTE, UMTS, GLONASS and FAKRA are trademarks.  
Other products and/or company names might be trademarks of their respective owners.

DISCLAIMER While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this data sheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this data sheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2020 TE Connectivity. All Rights Reserved. | Published 04-2020