


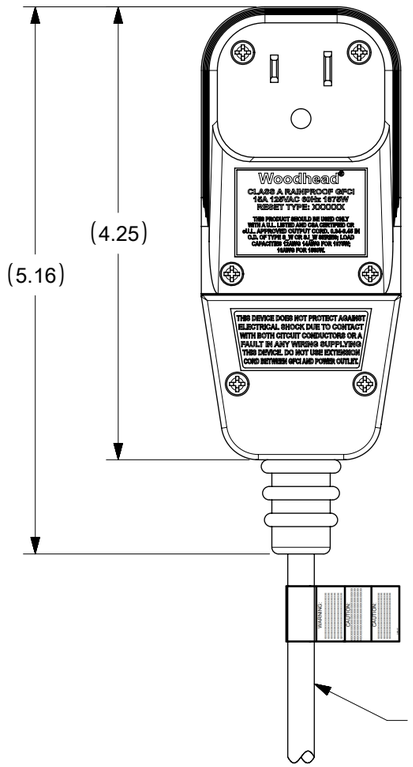


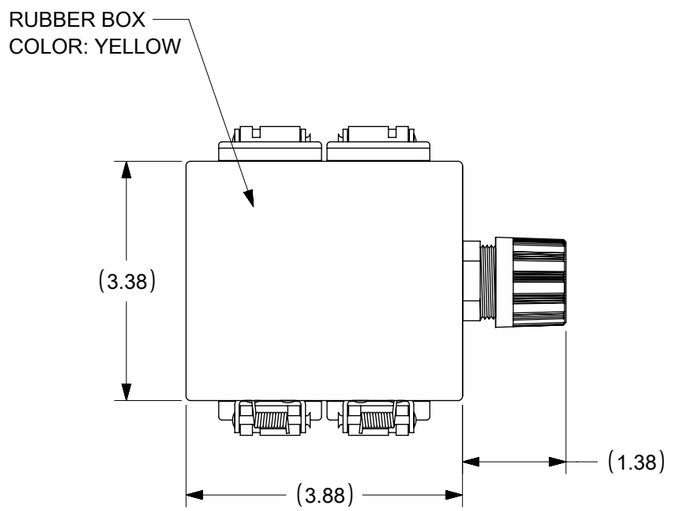

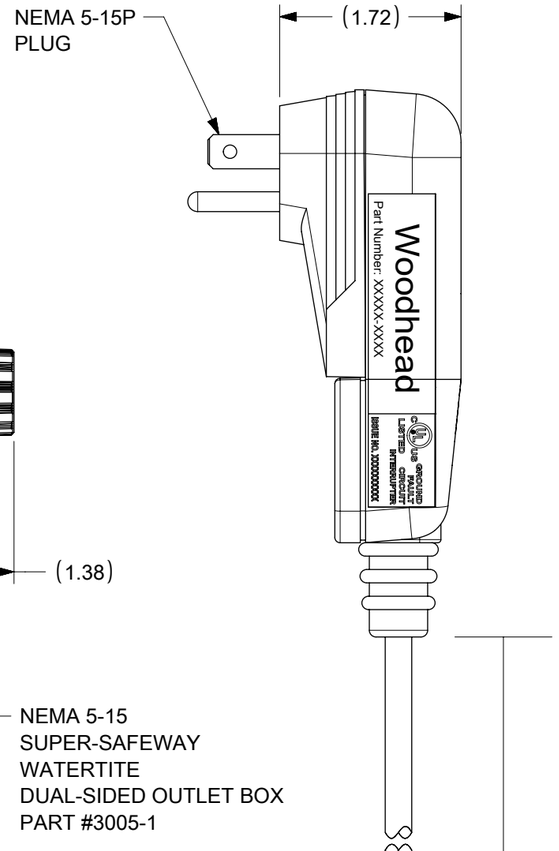

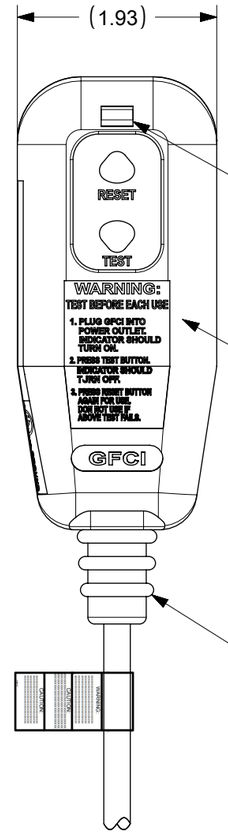


LED INDICATOR
CONFIRMS POWER
AND FAULT STATUS

HIGH STRENGTH
POLYCARBONATE
HOUSING
COLOR: BLACK

CORD STRAIN
RELIEF
COLOR: BLACK

#12-3 SJTW
300V CORD
COLOR: YELLOW

NEMA 5-15
SUPER-SAFEWAY
WATERTITE
DUAL-SIDED OUTLET BOX
PART #3005-1

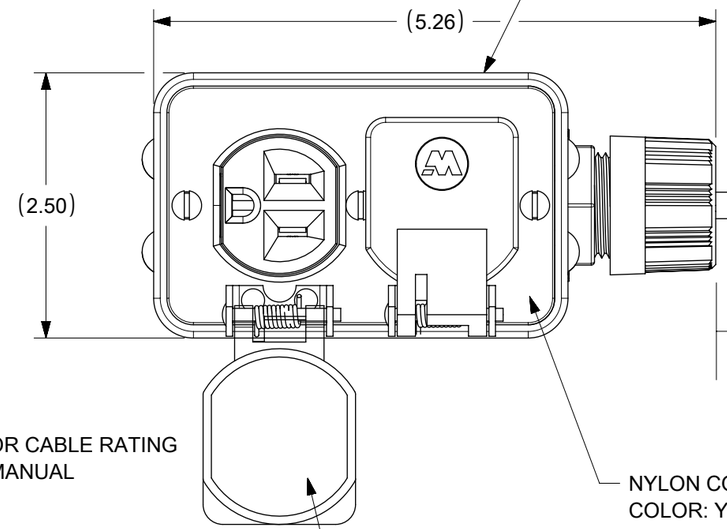

LENGTH "L"

NYLON COVER PLATE
COLOR: YELLOW

POLYCARBONATE FLIP LIDS
COLOR: YELLOW

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530084	15053W-2A	2 FT ± 1 IN	AUTO
1301530082	15053W-25A	25 FT ± 2 IN	AUTO
1301530087	15053W-50A	50 FT ± 4 IN	AUTO
1301530085	15053W-2M	2 FT ± 1 IN	MANUAL
1301530083	15053W-25M	25 FT ± 2 IN	MANUAL
1301530088	15053W-50M	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED:	UL AND cUL
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 15 AMPS OR CABLE RATING
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0
DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: INCH | SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO:	683960	
DRWN:	VBASUTHKARP	2021/10/28
CHK'D:	DNGUYEN62	2021/11/15
APPR:	HKNEELAND	2022/01/21
INITIAL REVISION:		
DRWN:	HRUIZ01	2013/02/08
APPR:	JFMURPHY	2015/04/20

THIRD ANGLE PROJECTION | DRAWING: B-SIZE | SERIES: 130153

molex

120V 15A GFCI PLUG
W/ 4 RCPT WEATHER RESIST BOX NEMA 5-15

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-130153-020	PSD	001	A1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/21 00:37:43

FORMAT: master-tb-a
REVISION: J1
DATE: 2021/05/01