C&D TECHNOLOGIES
Power Solutions

Corporate: www.cdtechno.com
Product: www.cdpoweronline.com

WPA50

50 Watt Single Output Eighth Brick DC/DC Converter



- Industry Standard Footprint & Size - 2.3" x 0.9" x 0.35" (58.42mm x 22.86mm x 9.0mm)
- High Efficiency - Up To 91%
- Wide Input Voltage Range: 36 – 75VDC
- Output Voltages: 1.2 V, 1.5V, 1.8V, 2.2V, 2.5V, 3.3V & 5.0V
- Remote Output Sense
- Remote ON/OFF (Positive or Negative Logic)
- Output Overcurrent Protection - Hiccup Mode
- Input Side "L" Filter
- No Minimum Load Required
- Isolation Voltage of 1500 VDC
- High Reliability
- Fixed Frequency Operation
- Safety per UL/CUL 60950, EN 60950, Operational Insulation Meets TNV-SELV Isolation Requirements
- Meets Conducted Emissions Requirements of FCC Class B and EN55022 Class B with External Filter
- C&D Technologies, Power Electronics Division is ISO9001:2000 Certified
- No Heatsinks
- Low Profile and Low Weight
- Thermal Shutdown

The WPA50 Series is a 50 Watt single output, low-profile DC-DC converter in an industry standard package of 2.3" x 0.9" x 0.35" (58.42mm x 22.86mm x 9.0mm). The WPA50 uses unique proprietary technologies to deliver ultra-high efficiencies and excellent thermal performance. It includes extensive control and protection features for maximum flexibility and provides a versatile solution for a whole range of applications with its input voltage range of 36-75 VDC and output voltages between 1.2VDC and 5.0VDC.

The power dissipation of the WPA50 series is so low that a heat sink is not required. The product features fast dynamic response characteristics and low output ripple critical for low voltage applications. WPA DC-DC converter modules are certified to UL/CUL 60950, and VDE to EN60950. It meets CISPR22/EN55022/FCC15J Class B specs for EMI levels with external filtering.

This high quality and highly reliable product is competitively priced and an ideal solution for distributed power, telecoms and datacom applications.

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT MIN LOAD(A)	OUTPUT CURRENT RATED OUTPUT (A)	INPUT CURRENT RATED LOAD (A)	EFFICIENCY (%) MIN
WPA50R48S012	48	1.2	0.0	18	0.58	80
WPA50R48S015	48	1.5	0.0	18	0.70	82
WPA50R48S018	48	1.8	0.0	18	0.80	85
WPA50R48S022	48	2.2	0.0	18	0.99	85
WPA50R48S025	48	2.5	0.0	18	1.11	85
WPA50R48S033	48	3.3	0.0	15	1.20	88
WPA50R48S050	48	5.0	0.0	10	1.17	90

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Duration	Continuous
Internal Power Dissipation	As low as 5 Watts
Lead Temperature (soldering, 10 seconds max)	+300°C
Continuous Input Voltage	75 VDC
Storage Temperature	+125°C
Input to Output Isolation	1500 VDC

SPECIFICATIONS, ALL MODELS

Specifications are at T_A = +25°C, Airflow = 300LFM (1.5m/s) at nominal input voltage unless otherwise specified.


	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	**INPUT**					
	Voltage Range	Vin = 48V, Io=I Rated	36	48	75	VDC
	Reflected Ripple Current	Vin = 48V, Io=I Rated		450	600	mApk-pk
	Inrush Charge			42		µC
	Maximum Input Current	Vin=36V				
	1.2 Vout			0.75		A
	1.5 Vout			0.93		A
	1.8 Vout			1.10		A
	2.2 Vout			1.31		A
	2.5 Vout			1.50		A
	3.3 Vout			1.60		A
	5.0 Vout			1.55		A
	INPUT CONTROL					
	Temperature Shutdown				115	℃
	Temperature Hysteresis				5	℃
	Quiescent Standby Current	Vin = 48V		3	4	mA
	Power Dissipation	No Load, Remote On/Off Disabled, Vin = 48Vdc			2.00	W
	Undervoltage Shutdown		31.50	32.5	35.0	V
	Undervoltage Hysteresis		0.50	2	3.00	V
	ISOLATION					
	Input/Output Isolation Voltage			1500	2250	VDC
	Resistance			10		MΩ
	Capacitance			1.5		nF
	Leakage Current	240 Vrms, 50Hz		100		µA
OUTPUT	**OUTPUT**					
	Rated Power	WPA50R48S012		22		W
		WPA50R48S015		27		W
		WPA50R48S018		33		W
		WPA50R48S022		40		W
		WPA50R48S025		45		W
		WPA50R48S033		50		W
		WPA50R48S050		50		W
	Voltage Setpoint Accuracy			1.0	1.5	% of VNOM
	Output Voltage Trim Range		-5.0		+8.0	% of VNOM
	Temperature Coefficient			±0.002	±0.005	%/°C
	Output Voltage Regulation					
	Line Regulation	Vin = 36V - 75V, Iout = Max		0.30	0.50	%
	Load Regulation	Vin = 48V, Iout = 0-Max		0.30	0.60	%
	Ripple & Noise (NOTE 1)	Vin = 48V, < 20Mhz bandwidth			75	mVp-p
	Transient Response	Step change in output current (50%-100% Step @ 0.2A/ µs)				
	1.2 - 2.5 Vout	Vin = 48V			8	% of VNOM
	3.3 - 5.0 Vout	Vin = 48V			6	% of VNOM
	Turn-On Time	Vin = 48V		200	500	mS
	Remote Sense Compensation				8	%
	Overcurrent Protection	Vin = 48V	105		140	%
	GENERAL					
	Switching Frequency		380	400	420	KHz
	MTTF per ML-HDBK-217 Ground Benign	Circuit Stress Method TA = +25°		TBD		Hrs

NOTE 1: Measured at 20 MHz bandwidth across a 10µf multi layer ceramic capacitor located approximately 1" from output terminals.

PERFORMANCE CURVES

Rev B1 of the WPA50 Datasheet will include extensive performance curves and graphs.

MECHANICAL

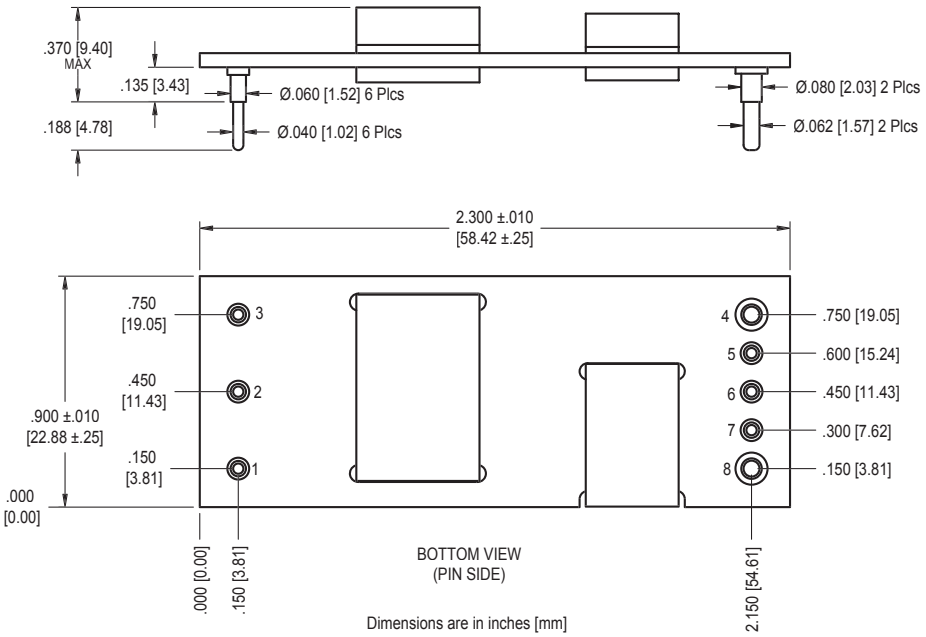

PIN FUNCTIONS	
1	+Vin
2	Remote On/Off
3	-Vin
4	-Vout
5	- Sense
6	Trim
7	+ Sense
8	+Vout

NOTES:

Pin placement tolerance: +.010

Pin material: Brass

Pin Finish: Tin/Lead over Nickel

Converter weight: [16g]

ORDERING INFORMATION

To Find Model Number

WPA5048S y -

Device Family
50 Watt, Single Output,
Eighth Brick, 48VDC Input Range

Model Number
Selected from Product Selection Chart (above)
y = 012 = 1.2V, 015 = 1.5V, 018 = 1.8V, 022 = 2.2V,
025 = 2.5V, 033 = 3.3V, 050 - 5.0V,

Remote On/Off Logic
No Number = Positive Logic
1 = Negative Logic

Model Numbers	Part Numbers
WPA50R48S012	6064958
WPA50R48S015	6064959
WPA50R48S018	6064960
WPA50R48S022	6064961
WPA50R48S025	6064962
WPA50R48S033	6064963
WPA50R48S050	6064964
WPA50R48S012-1	6064967
WPA50R48S015-1	6064968
WPA50R48S018-1	6064969
WPA50R48S022-1	6064970
WPA50R48S025-1	6064971
WPA50R48S033-1	6064972
WPA50R48S050-1	6064973

Power Electronics Division, Americas
3400 E Britannia Drive, Tucson, Arizona 85706
Tel: 800.547.2537 Fax: 520.295.4197

C&D Technologies, EMEA/Asia/Pacific
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.