
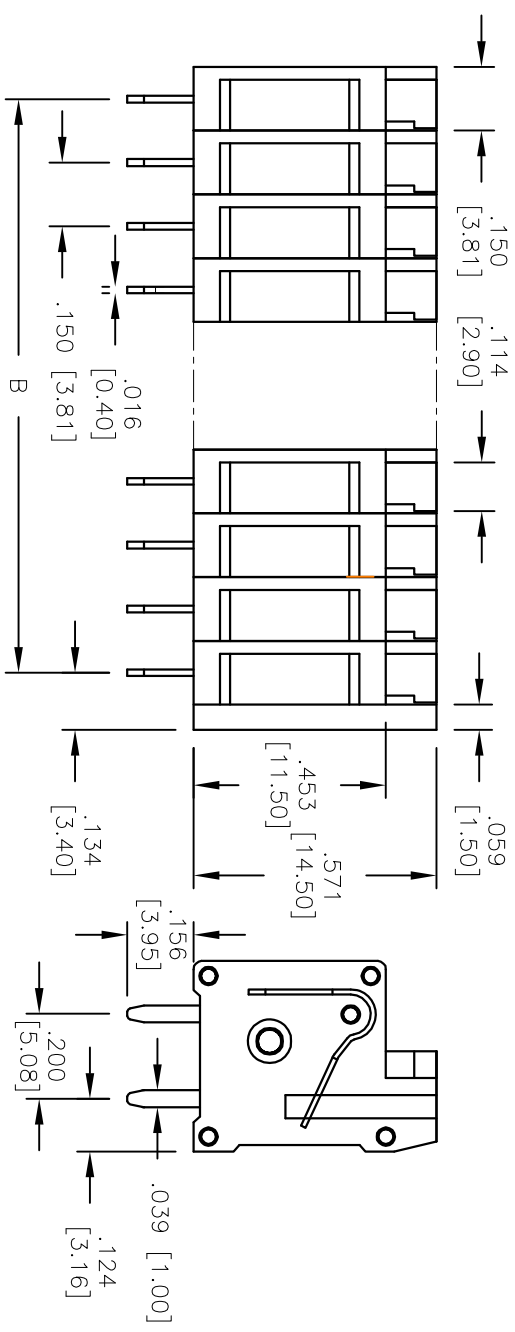


Rev	AWO #	Description	Date	Appr
-	11012	RELEASED	1/5/11	

APPROVED: _____
 DATE: _____ TITLE: _____

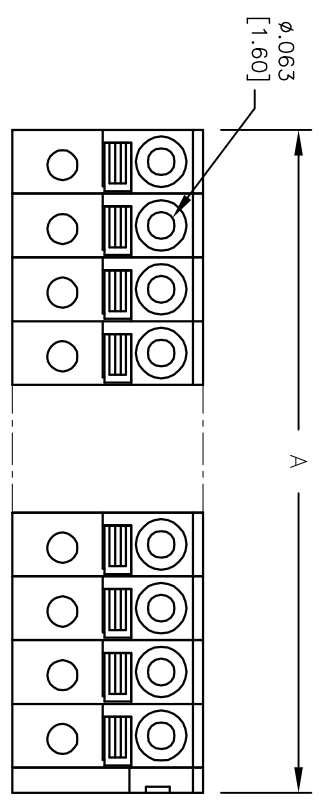

SPECIFICATIONS:
 Material: Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 End Plate: PA66, rated UL 94V-0
 Contact: Brass, Tin plated
 Springs: Stainless Steel
 Push Button: PBT

Electrical:
 Operation voltage: 300 VAC max
 Current rating: 8 Amps max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2500 VAC for 1 minut
 Environmental:
 Operating temperature: -30°C to +80°C
 Wire range: 16AWG to 28AWG(Solid)
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 20
 A = .150 [3.81] x No. of Spaces + .209 [5.31]
 B = .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .150 [3.81] EURO BLOCK



APPROVALS	DATE
DRAWN AY	1/5/11
CHECKED JL	1/5/11
APPROVED	

SIZE	PART NO.	REV.
X	EB-A11012-XX-B	
REF: S00128T	SCALE: NTS	SHEET 1 OF 1